
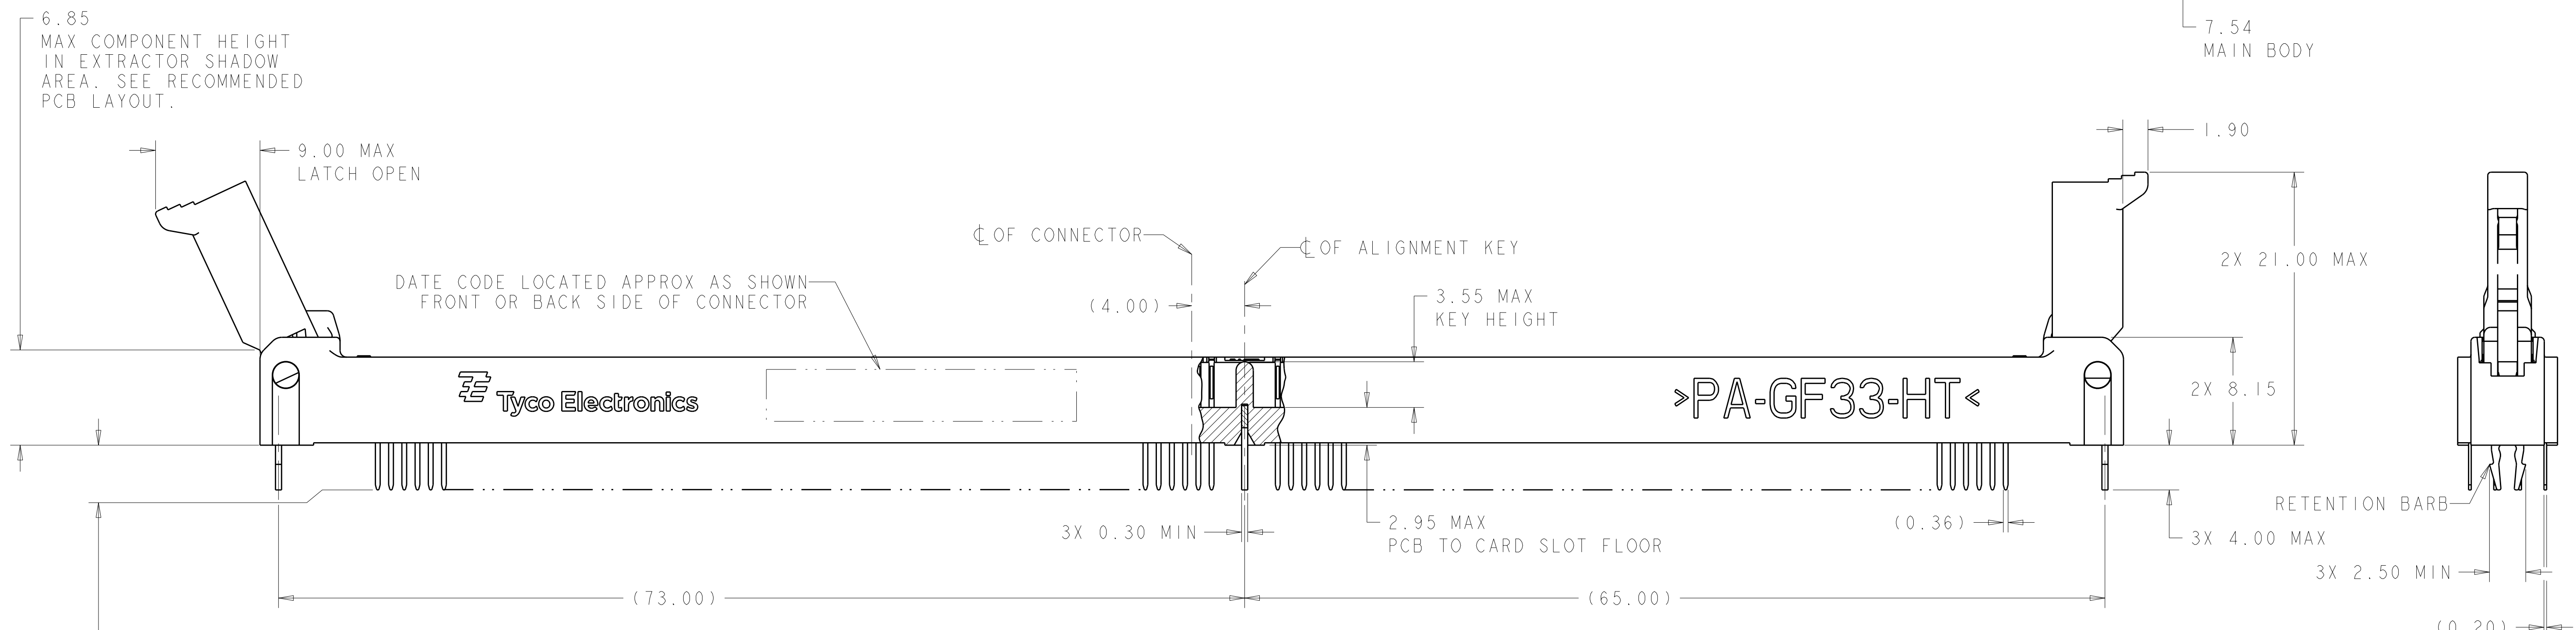


LOC	DIST	REV	DATE	BY	CHKD	APVD
GP	00	A2	09MAY2011	RK	HMR	

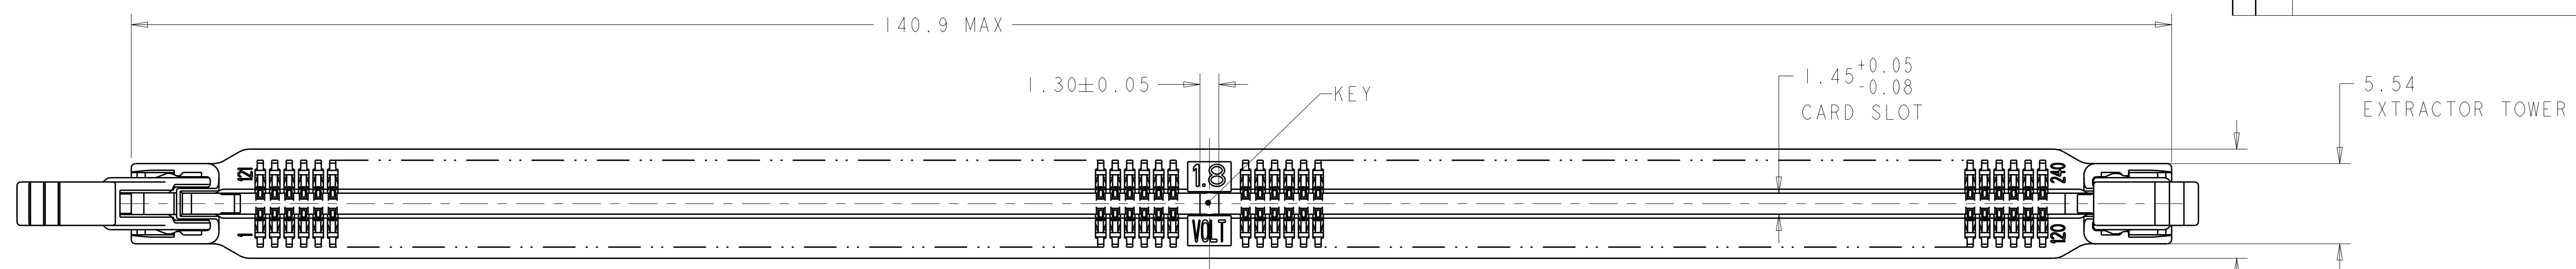


MATERIALS:
 HOUSING: HIGH TEMPERATURE NYLON, BLACK, UL94 V-0
 EXTRACTOR: HIGH TEMPERATURE THERMOPLASTIC
 CONTACTS: COPPER ALLOY
 RETENTION BARB: STAINLESS STEEL

INTERFACE FINISH:
 (1) 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL
 (2) 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL
 (3) 0.00008 MIN THK GOLD OVER 0.00127 MIN THK NICKEL

- 3 FINISHED HOLE SIZE. 0.15 MAXIMUM ANNULAR RING.
- 4 KEEP OUT ZONE.
- 5 KEEP OUT AREA RESERVED FOR SOCKET EXTRACTORS, BOTH ENDS.
- 6 SOLDER TAIL FINISH: 0.00300 MIN THK MATTE TIN OVER 0.00127 MIN THK NICKEL.
- 7 LED LOCATION AS APPLICABLE PER CUSTOMER.
- 8 DATUM **-G-** IS CONNECTOR SIDE SURFACE OF PCB.

9. COMPLIES WITH JEDEC SPECIFICATION SO-001.
 10. CENTER HOLE CAN BE EITHER 2.45 BY 1.80 AS SHOWN OR A 2.45 DIAMETER ROUND HOLE.

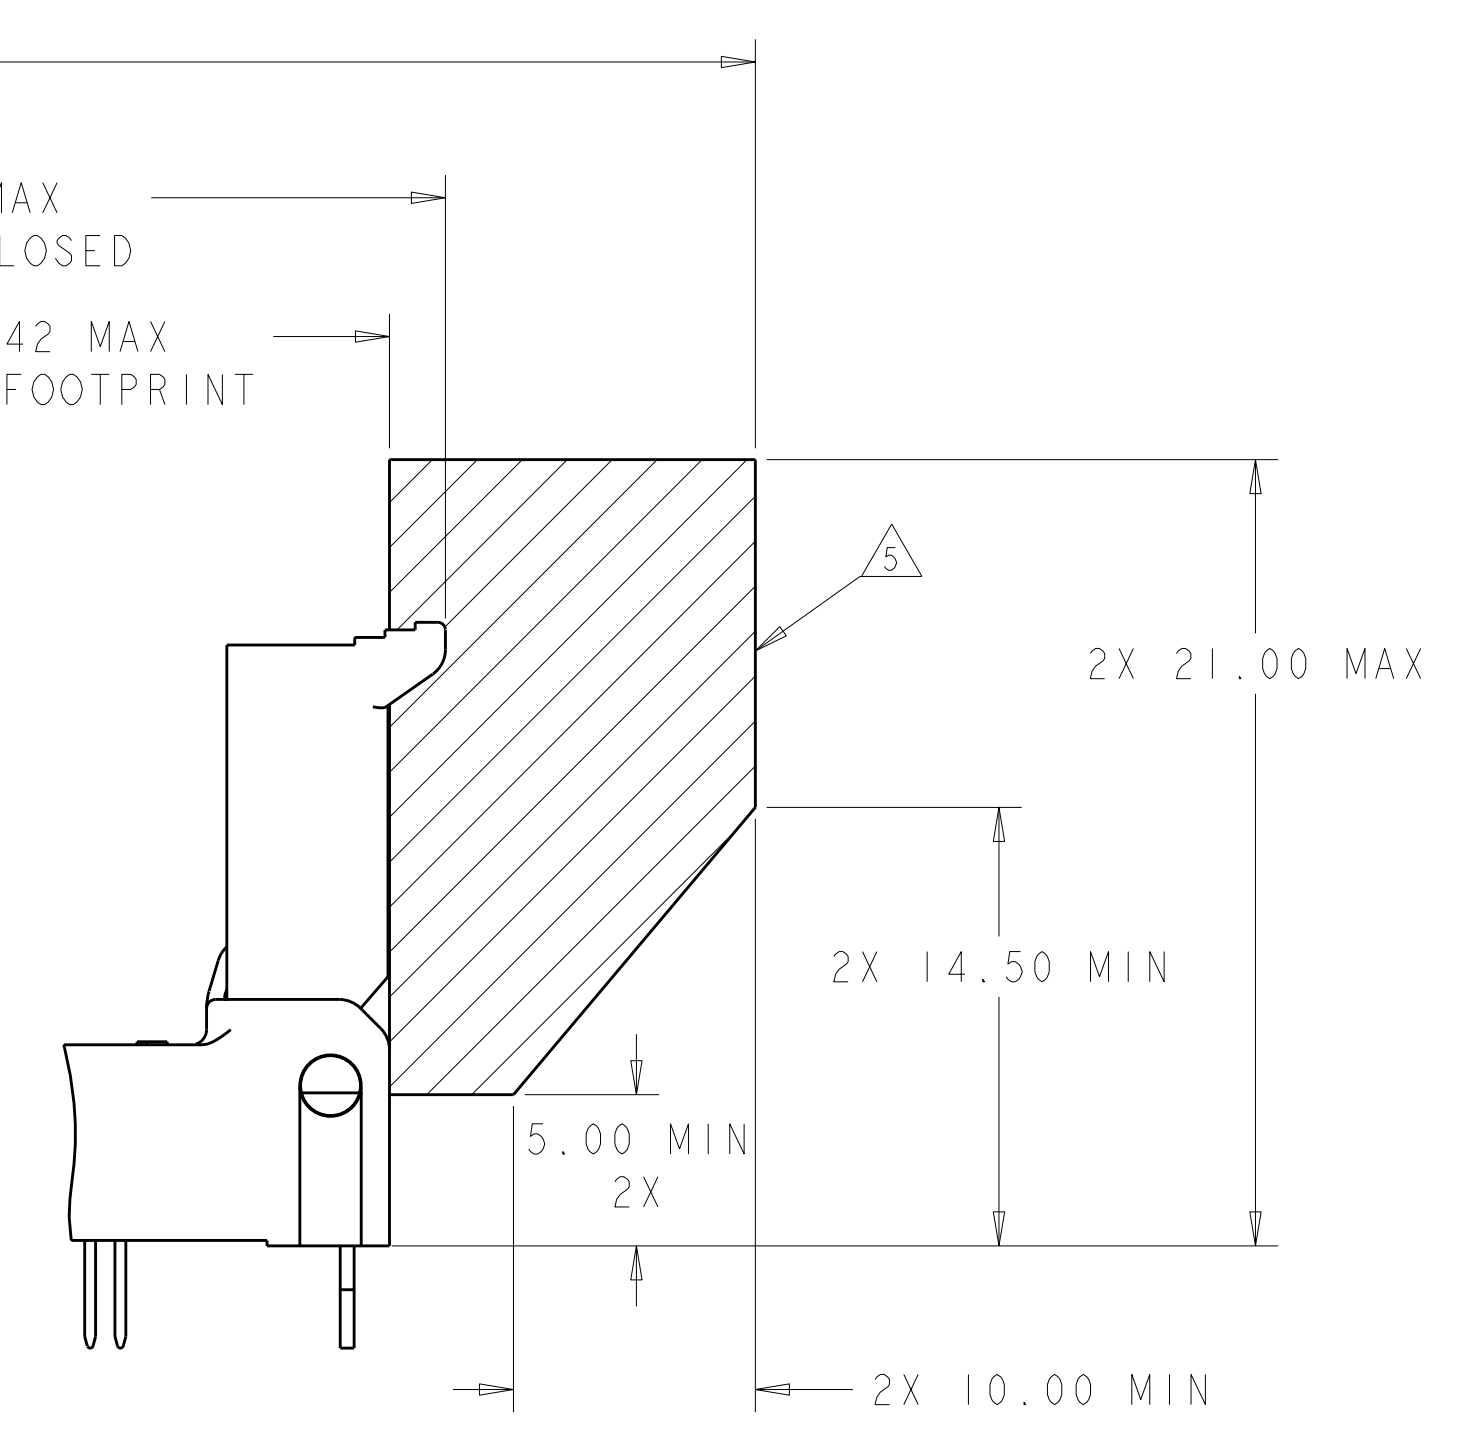

CONTACT COLOR	CONTACT GOLD INTERFACE	TAIL LENGTH	PART NUMBER
NATURAL	0.00008 MIN	4.20	1888669-9
		3.38	1888669-8
		2.87	1888669-7
NATURAL	0.00038 MIN	4.20	1888669-6
		3.38	1888669-5
		2.87	1888669-4
NATURAL	0.00076 MIN	4.20	1888669-3
		3.38	1888669-2
		2.87	1888669-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRAWN: D. RINGLER 29SEP2006	DATE: 29SEP2006	NAME: M. ROWERS	DATE: 22DEC2006
CHKD: J. PENNYPACKER 29SEP2006	DATE: 29SEP2006	PRODUCT SPEC: 108-2111	APPLICATION SPEC: 114-13087
MATERIAL: 9 PLC ±0.5 3 PLC ±0.13 5 PLC ±0.013 4 PLC ±0.001	TOLERANCES UNLESS OTHERWISE SPECIFIED:	WEIGHT: -	SCALE: 4:1

STE TE Connectivity



SOCKET ASSEMBLY, DDR2 VLP DIMM, SOLDER TAIL, 240 POSITION

SIZE: A100779 CAGE CODE: 1888669

CUSTOMER DRAWING

4805 (3/11)


LOC	DIST	REVISIONS			
P	LTB	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

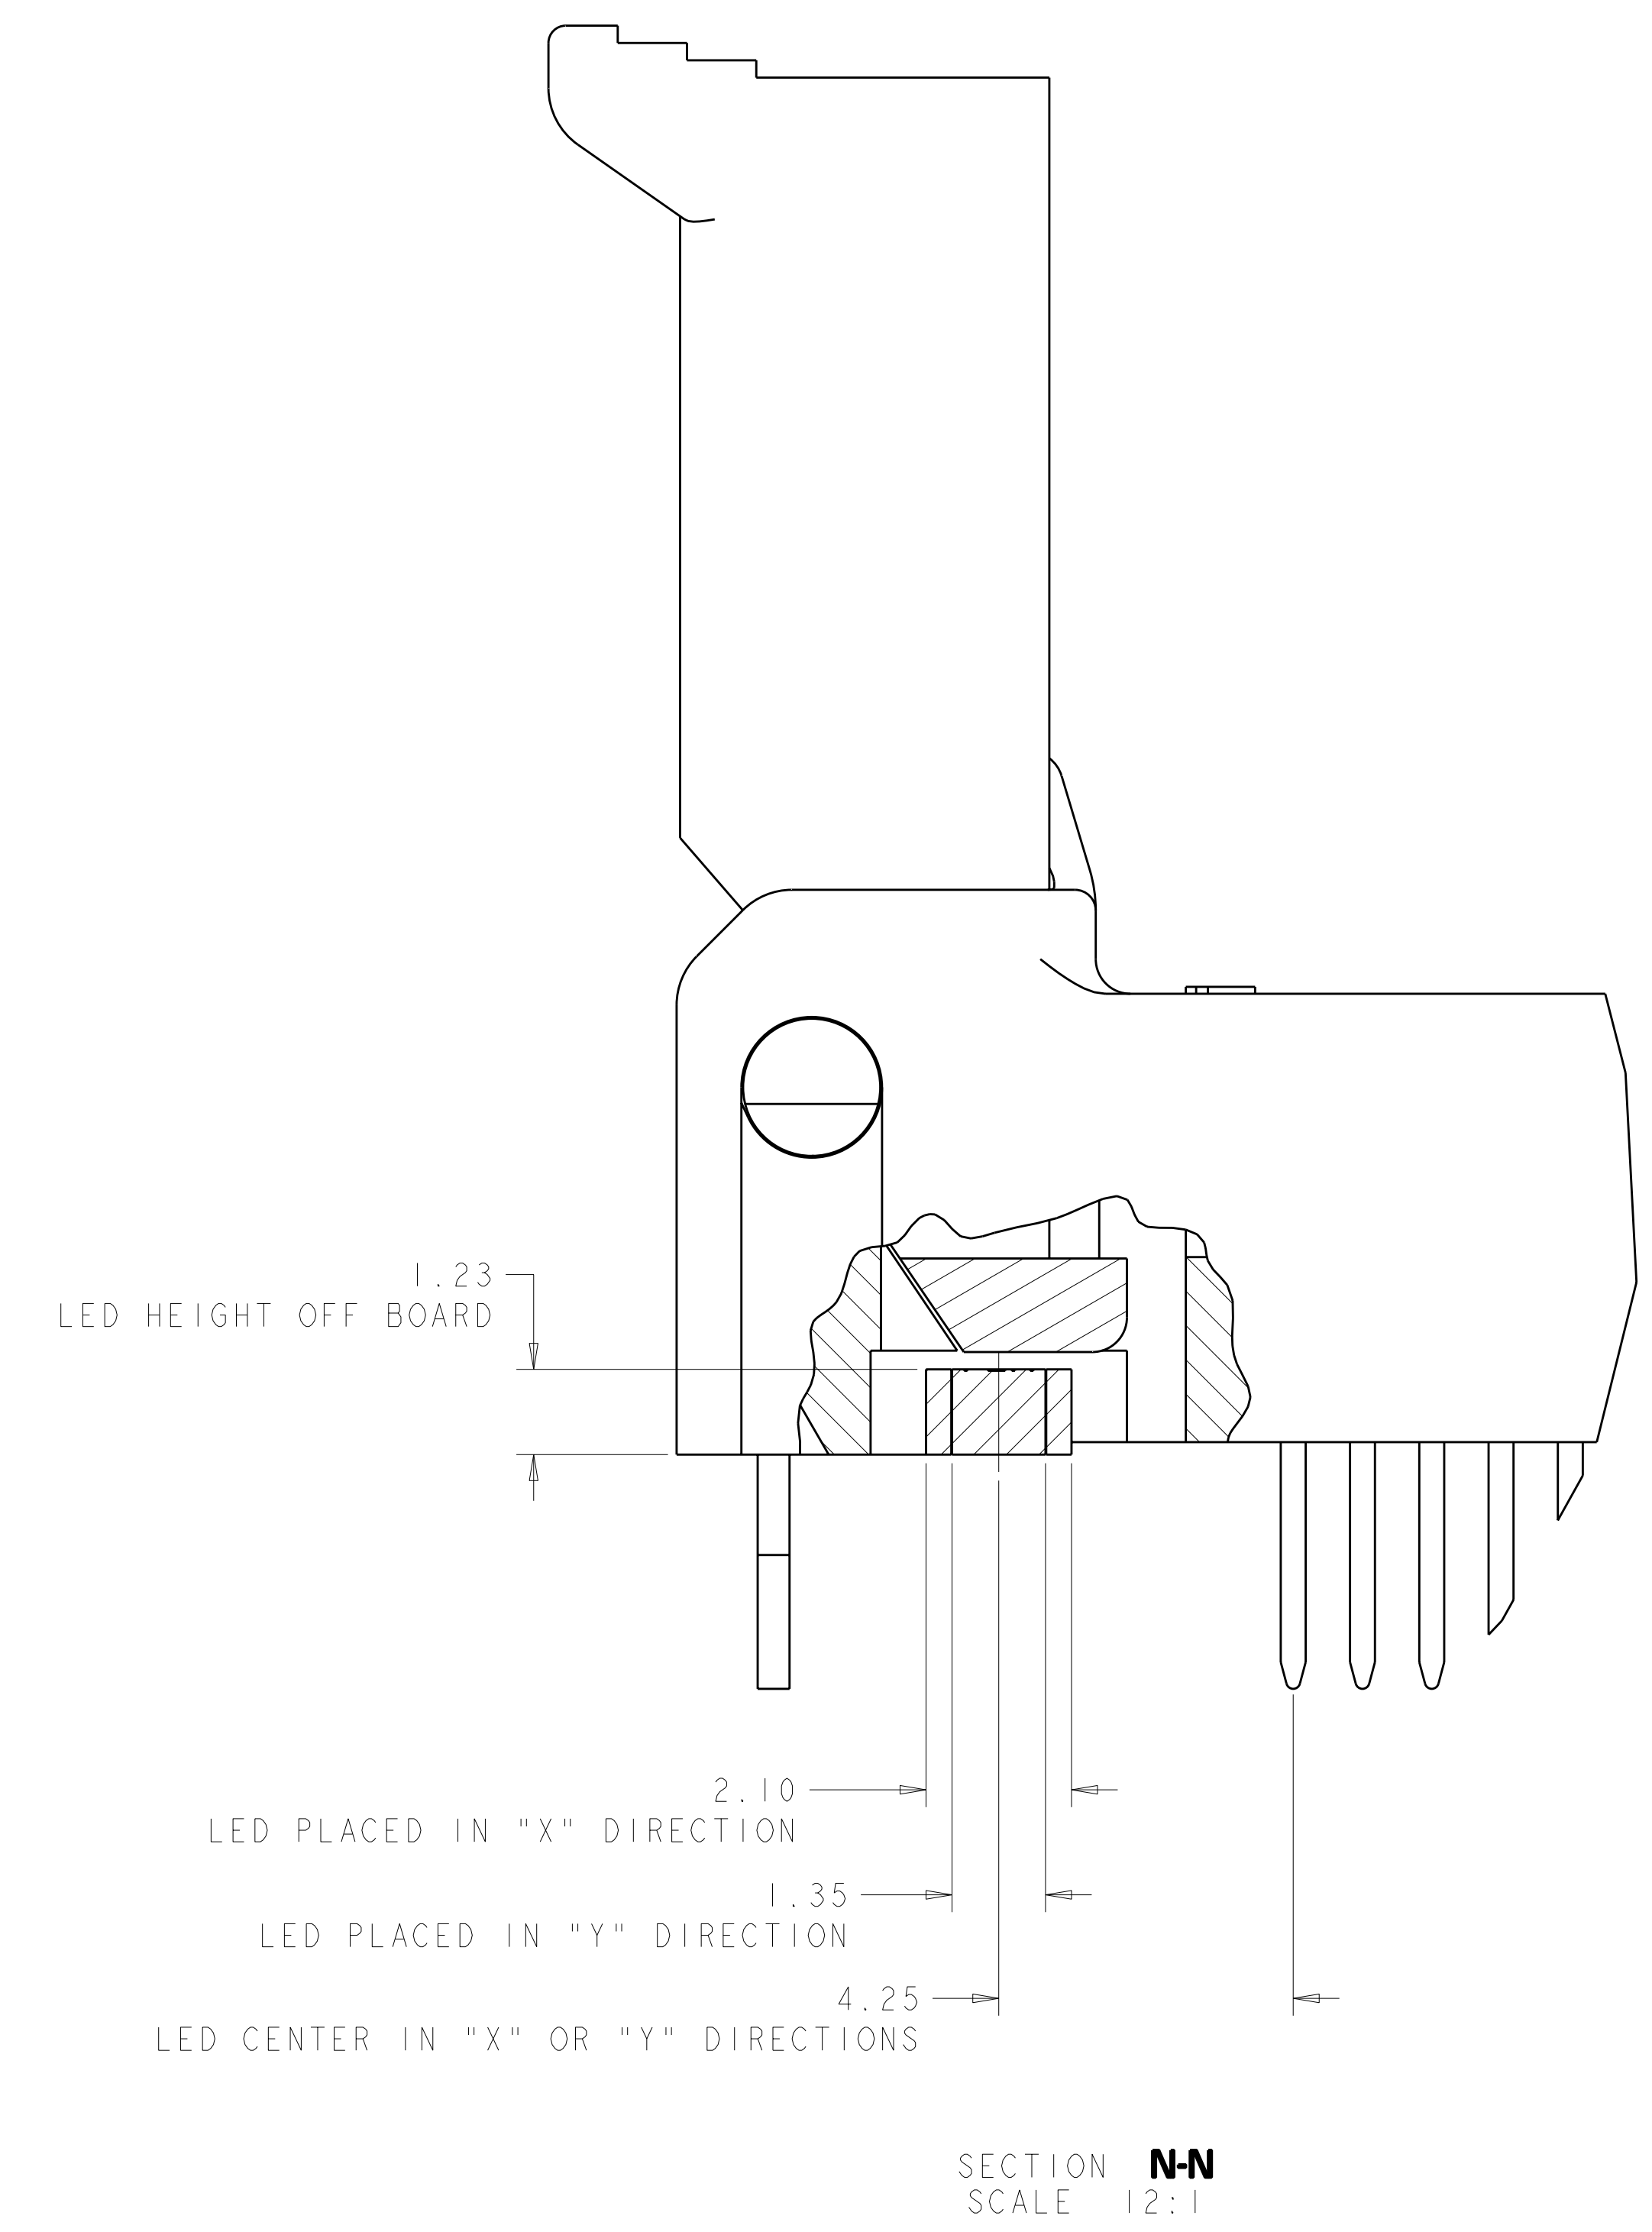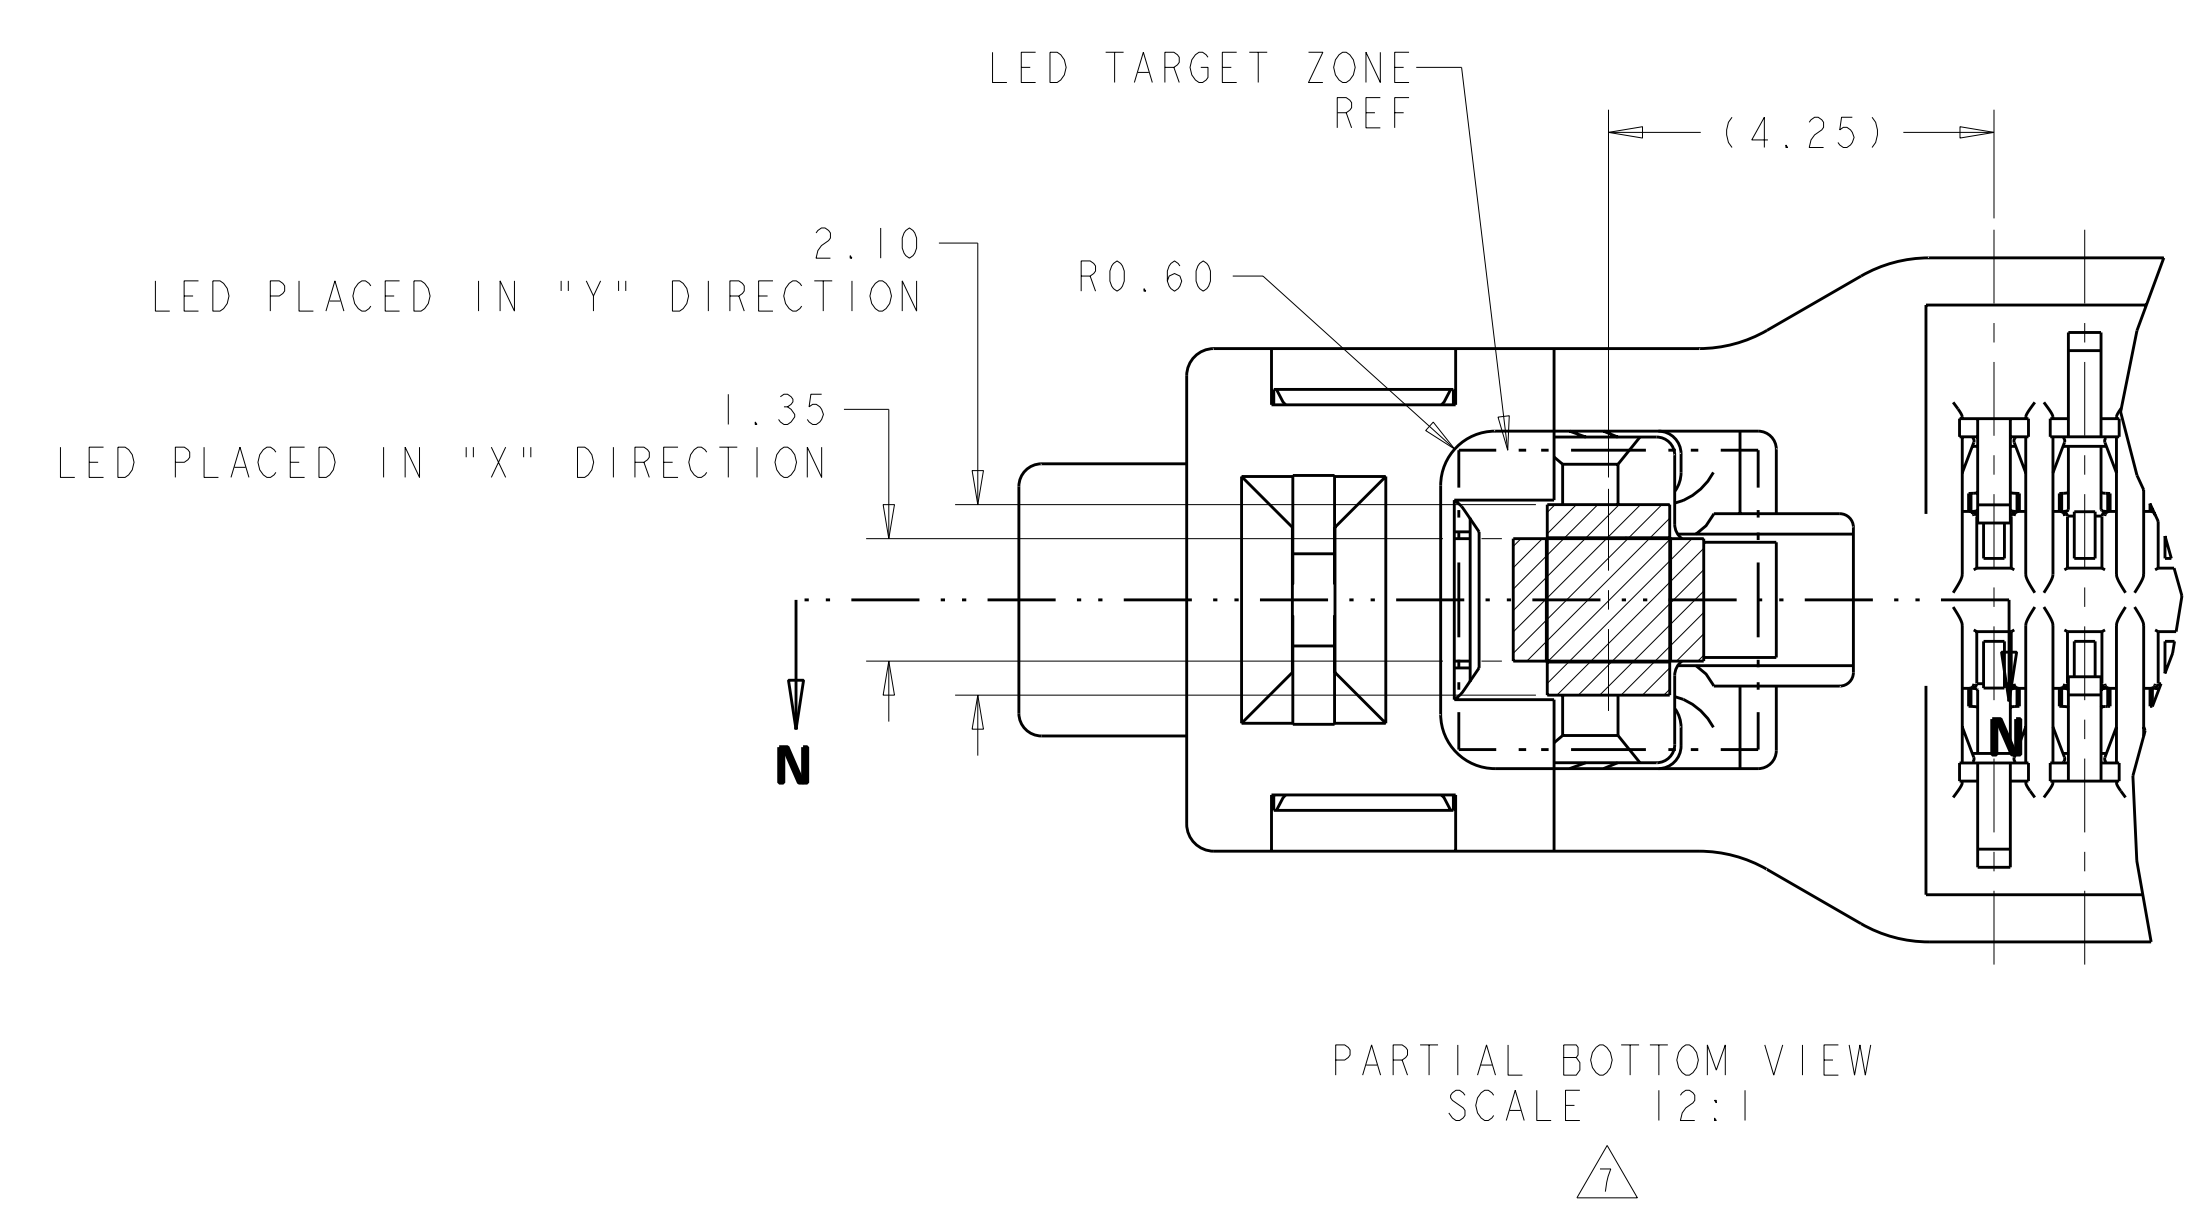


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RINGLER 29SEP2006	TE Connectivity
DIMENSIONS: mm		CHK J. PENNYPACKER 29SEP2006	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. ROWERS 22DEC2006	NAME SOCKET ASSEMBLY, DDR2 VLP DIMM, SOLDER TAIL, 240 POSITION
9 PLC ±0.5	1 PLC ±0.13	PRODUCT SPEC 108-2111	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
5 PLC ±0.013	4 PLC ±0.001	APPLICATION SPEC 114-13087	A1100779C=1888669
ANGLES ±0.0001	FINISH	WEIGHT	SCALE 4:1 SHEET 2 OF 3 REV A2
MATERIAL	FINISH	CUSTOMER DRAWING	

LOC	DIST	REV	DATE	BY	APPD
GP	00				

REVISIONS		DATE	BY	APPD
1	SEE SHEET 1			

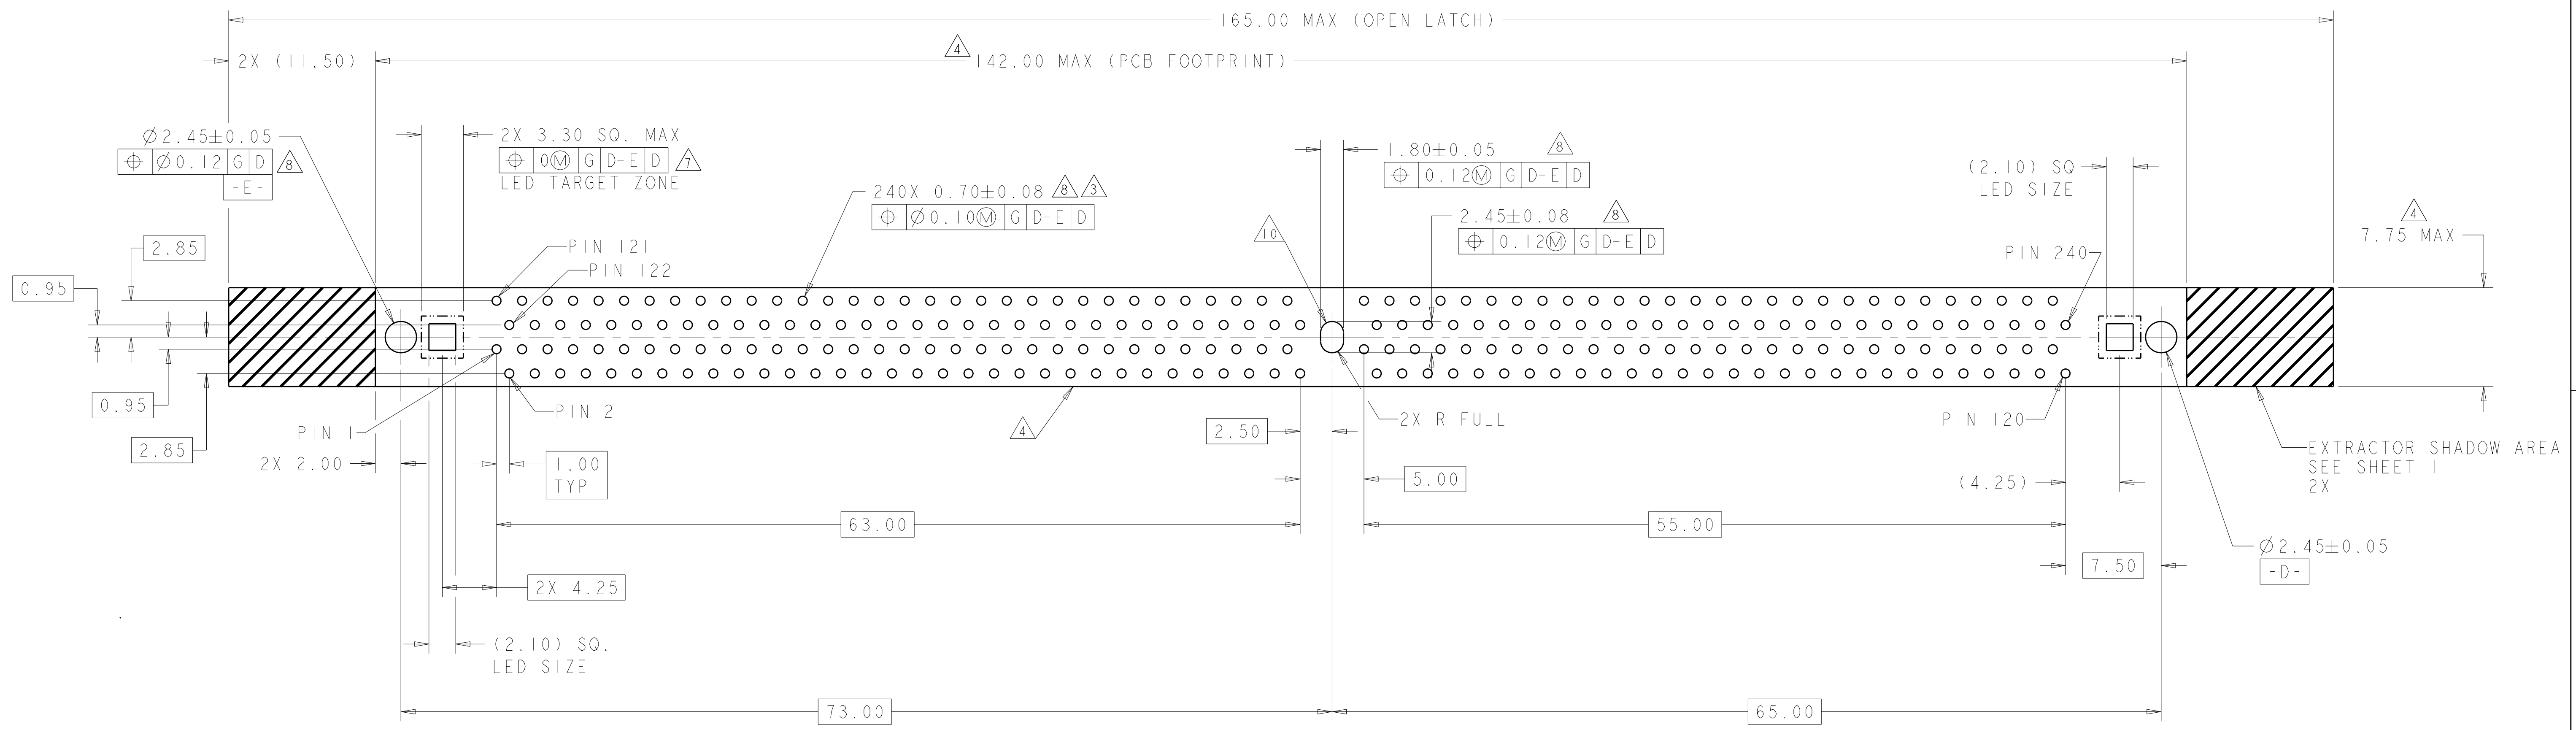

RECOMMENDED PCB LAYOUT
VIEWED FROM CONNECTOR SIDE

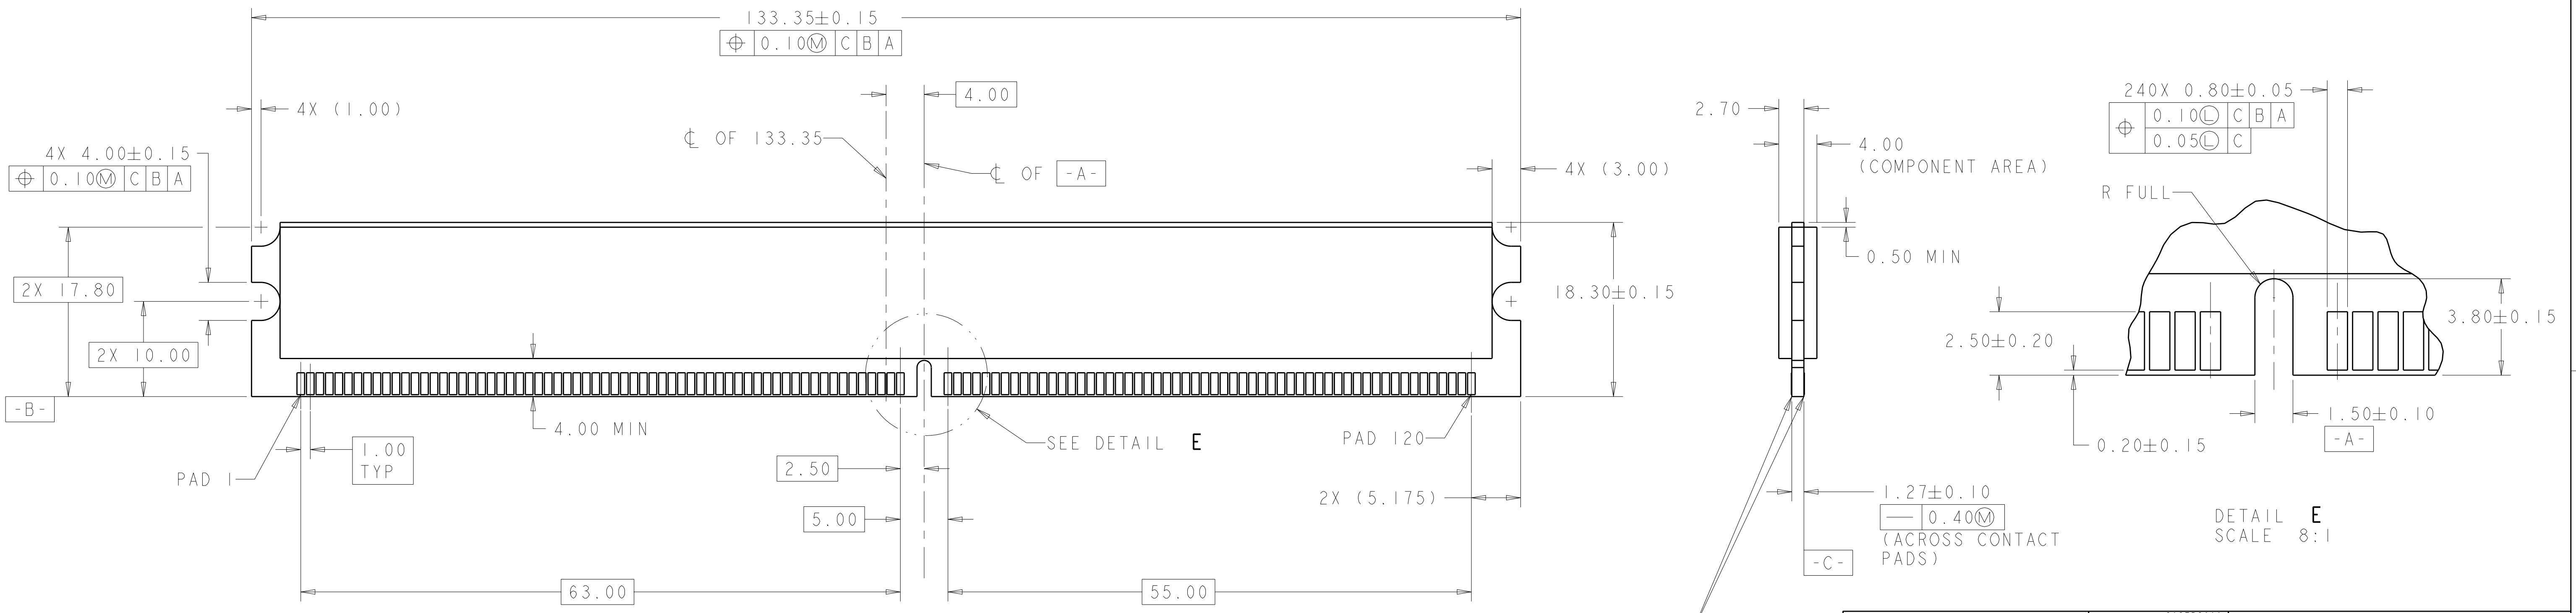

RECOMMENDED MODULE LAYOUT

SCALE 3:1

NOTE: REFER TO JEDEC MO-237 VARIATIONS DB, EB, FB, GB FOR COMPLETE MODULE DETAILS

0.20-0.05 X 45° OPTIONAL
MUST NOT HIT GOLD CONTACTS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RINGLER	29SEP2006	 TE Connectivity
		CHK J. PENNYPACKER	29SEP2006	
		APVD M. ROWERS	22DEC2006	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
mm		9 PLC ±0.5 2 PLC ±0.13 5 PLC ±0.013 4 PLC ±0.001 ANGLES ±0.001		SOCKET ASSEMBLY, DDR2 VLP DIMM, SOLDER TAIL, 240 POSITION
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO. RESTRICTED TO
				114-13087 WEIGHT A1100779C=1888669
		CUSTOMER DRAWING		SCALE 1:1 SHEET 3 OF 3 REV A2