SMD Inductors

Large-Current Power Inductors MPLCG



Overview

The KEMET MPLCG metal composite inductors are ideal for use in DC to DC switching power supplies. The MPLCG's small size makes it ideal in applications with tight space requirements. The combination of composite core material and round wire allows these inductors to be used in applications with high switching frequencies and where e ciency is important.

Applications

- · Switching DC-DC power supplies
- · Notebook computers
- Tablets Embedded computer systems
- · Servers and storage
- HDTVs

Bene fts

- · Metal composite powder
- · Operating temperature up to +125°C
- · High inductance
- Low DCR
 Low pro le 3 mm maximum
- · Low core loss
- · Low accoustic noise



Part Number System

MPLCG			
Series	Size Code	Inductor	Inductance Code µH
MPLCG	0530 0630		R = decimal point Examples: R22 = 0.22 µH 1R0 = 1.0 µH



Performance Characteristics

Item	Performance Characteristics	
Operating Temperature	-40°C to +125°C (including self-temperature rise)	
Rated Inductance Range	0.22 - 4.70 μH at 100 kHz, 1 mA	
Inductance Tolerance	±20%	
Rated DC Resistance Range	2.7 74.0 m maximum	
Rated Current Range	4.5 – 14.1 A	

Table 1 – Ratings & Part Number Reference

Dort Number	Inductance (µH)	Inductance	DC Resistance (mΩ) Maximum	Rated Current (A)	
Part Number	at 100 kHz, 1 mA	Tolerance		Irms ¹ (Ref.)	Isat (Ref.)
MPLCG0530LR22	0.22	±20%	3.7	14.1	10.2
MPLCG0530LR33	0.33	±20%	7.3	10.3	8.9
MPLCG0530LR47	0.47	±20%	8.4	9.5	8.9
MPLCG0530LR68	0.68	±20%	11.6	7.9	6.8
MPLCG0530L1R0	1.00	±20%	14.6	7.4	5.6
MPLCG0530L1R5	1.50	±20%	21.7	5.9	5.6
MPLCG0530L2R2	2.20	±20%	36.4	4.5	5.0
MPLCG0530L3R3*	3.30		58.0	3.6	3.1
MPLCG0530L4R7*	4.70		74.0	3.1	3.0
MPLCG0630LR22*	0.22		2.7	21.4	17.9
MPLCG0630LR33*	0.33		4.3	16.9	17.3
MPLCG0630LR47	0.47	±20%	5.0	15.8	15.6
MPLCG0630LR68*	0.68		6.0	14.2	12.6
MPLCG0630LR82*	0.82		7.0	13.1	11.8
MPLCG0630L1R0	1.00	±20%	9.0	11.9	11.3
MPLCG0630L1R5	1.50	±20%	15.0	9.9	8.3
MPLCG0630L2R2	2.20	±20%	19.0	8.2	7.8
MPLCG0630L3R3	3.30	±20%	30.0	6.5	6.3
MPLCG0630L4R7	4.70	±20%	41.0	5.5	5.4


¹ T = 40 K rise at rated current.

² Inductance drop 20% at rated current.


^{*} This part is not for new design.



DC-Superposed Characteristics

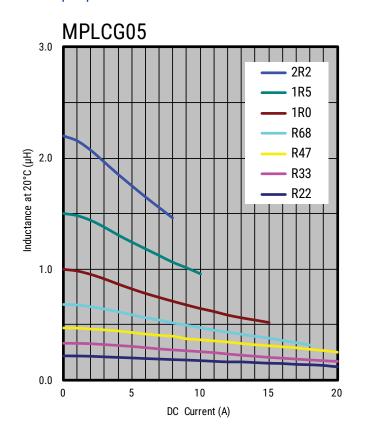

MPLCG06

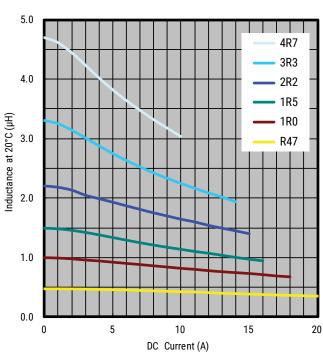


Dimensions

Part Number	Dimensions (mm)	Land Pattern (mm)
MPLCG0530		



Taping Specification






Soldering Process

Recommended Refow Soldering Profle

Reference ICP/JEDEC J-STD-020E

Profle Feature	Pb-Free Assembly	
Preheat/Soak		
Temperature Minimum (T _{Smin})	150°C	
Temperature Maximum (T _{Smax})	200°C	
Time (t_s) from T_{smin} to T_{smax}	60 - 120 seconds	
Ramp-Up Rate (T _L to T _P)	3 C/second maximum	
Liquidous Temperature (T _L)	217°C	
Time Above Liquidous (t _L)	60 - 150 seconds	
Peak Temperature (T _P)	250°C	
Time Within 5 C of Maximum Peak Temperature (t _p)	30 seconds maximum	
Ramp-Down Rate (T _P to T _L)	6 C/second maximum	
Time 25°C to Peak Temperature	8 minutes maximum	

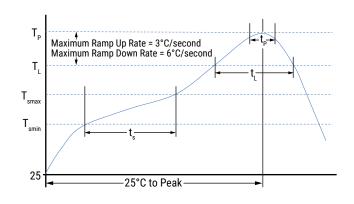

Handling Precautions

Inductors should be stored in normal working environments. While the inductors themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40 °C and maximum storage humidity not exceed 70% relative humidity. Atmospheres should be free of chlorine and sulfur bearing compounds. Temperature uctuations should be minimized to avoid condensation on the parts. For optimized solderability, inductors stock should be used promptly, preferably within six months of receipt.

Export Control

For customers in Japan

For products which are controlled items subject to the Foreign Exchange and Foreign Trade Law of Japan, the export license specified by the law is required for export.

For customers outside Japan

Inductors should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destruction weapons (nuclear, chemical, biological weapons or missiles), or any other weapons.



KEMET Electronics Corporation Sales O ces

For a complete list of our global sales o ces, please visit www.kemet.com/sales.

Disclaimer

All product speci cations, statements, information and data (collectively, the Information) in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporations (KEMET) knowledge of typical operating conditions for such applications, but are not intended to constitute—and KEMET speci—cally disclaims—any warranty concerning suitability for a speci—c customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.