



Discrete semiconductors selection guide 2016

Bipolar transistors, diodes, ESD protection, TVS,
filtering and signal conditioning, and MOSFETs



Our extensive package range provides maximum flexibility

	Miniaturization	>>	Medium Power
2 Pins	DSN0402 (SOD992) 0.4 x 0.2 x 0.12 DSN0603-2 (SOD962) 0.6 x 0.3 x 0.3 DSN1006-2 (SOD993) 1.0 x 0.6 x 0.3 DSN1006U-2 (SOD995) 1.0 x 0.6 x 0.3 DFN1006D-2 (SOD882D) 1.0 x 0.6 x 0.37 DFN1006-2 (SOD882) 1.0 x 0.6 x 0.48 SOD523 1.2 x 0.8 x 0.6 DFN1608D-2 (SOD1608) 1.6 x 0.8 x 0.37 DSN1608-2 (SOD963/SOD964) 1.6 x 0.8 x 0.25/0.29 SOD323F 1.7 x 1.25 x 0.7 SOD323 1.7 x 1.25 x 0.95 SOD123F 2.6 x 1.6 x 1.1 CFP3 (SOD123W) 2.6 x 1.7 x 1.0 CFP5 (SOD128) 3.8 x 2.6 x 1.0 CFP15 (SOT1289) 5.8 x 4.3 x 0.78 D2PAK (SOT404) 11.0 x 10.0 x 4.3		
3 Pins	DFN1006B-3 (SOT883B) 1.0 x 0.6 x 0.37 DFN1006-3 (SOT883) 1.0 x 0.6 x 0.48 DFN1010D-3 (SOT1215) 1.1 x 1.0 x 0.37 SOT663 1.6 x 1.2 x 0.55 SOT323 2.0 x 1.25 x 0.95 SOT23 2.9 x 1.3 x 1.0 DFN2020-3 (SOT1061) 2.0 x 2.0 x 0.62 DFN2020D-3 (SOT1061D) 2.0 x 2.0 x 0.62 SOT89 4.5 x 2.5 x 1.5 DPAK (SOT428) 6.6 x 6.1 x 2.3		
4/5 Pins	WLCSP4* 0.8 x 0.8 x 0.35 WLCSP5* 1.51 x 1.14 x 0.65 SOT665 1.6 x 1.2 x 0.55 SOT353 2.0 x 1.25 x 0.95 SOT143B 2.9 x 1.3 x 1.0 LPAK56 (SOT669) 5.0 x 6.0 x 1.0 SOT223 6.5 x 3.5 x 1.65		
6 Pins	DFN1010B-6 (SOT1216) 1.1 x 1.0 x 0.37 DFN1010-6 (SOT891) 1.0 x 1.0 x 0.48 DFN1410-6 (SOT886) 1.45 x 1.0 x 0.48 WLCSP6 1.48 x 0.98 x 0.35 SOT666 1.6 x 1.2 x 0.55 SOT363 2.0 x 1.25 x 0.95 DFN2020-6 (SOT1118) 2.0 x 2.0 x 0.62 DFN2020D-6 (SOT1118D) 2.0 x 2.0 x 0.62 DFN2020MD-6 (SOT1220) 2.0 x 2.0 x 0.62 SOT457 2.9 x 1.5 x 1.0		
≥ 7 Pins	DFN2110-9 (SOT1178) 2.1 x 1.0 x 0.48 DFN2111-7 (SOT1358) 2.1 x 1.1 x 0.5 DFN2510A-10 (SOT1176) 2.5 x 1.0 x 0.48 DFN2520-9 (SOT1333) 2.5 x 2.0 x 0.48 DFN2521-12 (SOT1156-1) 2.5 x 2.1 x 0.5 LPAK33 (SOT1210) 3.3 x 3.3 x 0.85 DFN4020-14 (SOT1334) 4.0 x 2.0 x 0.48 DFN4040-32 (SOT1318-1) 4.0 x 4.0 x 0.5 DFN5050-32 (SOT617-3) 5.0 x 5.0 x 0.85 LPAK56D (SOT1205) 5.0 x 6.0 x 1.0		

* The exact position of the balls and package dimensions vary.

Your global partner for discretes



Discretes semiconductors selection guide 2016

**Bipolar
transistors**

Page 7

Diodes

Page 29

**ESD protection,
TVS, filtering
and signal
conditioning**

Page 45

MOSFETs

Page 75

Packages

Page 130

Table of Contents

Bipolar transistors 7

High-power transistors	10
High-power transistors single	10
High-current, high-power transistors	10
High-power transistors double	10
Low V_{CEsat} (BISS) transistors	11
Low V_{CEsat} transistors up to 2000 mW	11
Low V_{CEsat} (BISS) transistors single NPN	11
Low V_{CEsat} (BISS) transistors single PNP	12
Low V_{CEsat} (BISS) double transistors	13
Low V_{CEsat} transistors up to 750 mW	14
Low V_{CEsat} (BISS) transistors single NPN	14
Low V_{CEsat} (BISS) transistors single PNP	15
Low V_{CEsat} (BISS) load switches	16
High-voltage low V_{CEsat} (BISS) transistors	18
Low V_{CEsat} (BISS) RETs	18
Low V_{CEsat} (BISS) transistor PNP – N-channel MOSFET combination	19
Advantages of low V_{CEsat} (BISS) technology	19
Resistor-equipped transistors (RETs)	20
RETs 100 mA single - Part 1	20
RETs 100 mA single - Part 2	20
RETs 100 mA double	21
RETs 500 mA	21
General purpose bipolar transistors	22
Single transistors NPN	22
Single transistors PNP	22
Double transistors	23
Single and double switching transistors	23
Medium-power general-purpose transistors	24
High-voltage transistors	24
LED driver	25
Constant-current source	25
Darlington transistors	26
Schmitt triggers	26
Low-noise transistors	26
Matched-pair transistors	27
MOSFET driver	28
Medium-frequency transistors	28

Diodes 29

Schottky barrier diodes and rectifiers	33
Medium-power low V_F Schottky rectifiers single ≥ 1 A - Flatpower packages	33
Medium-power low V_F Schottky rectifiers single ≥ 100 mA - DSN packages	34
Medium-power low V_F Schottky rectifiers single ≥ 200 mA - leadless (DFN) packages	35
Medium-power low V_F Schottky rectifiers single ≥ 200 mA - leaded packages	36
Medium-power low V_F Schottky rectifiers dual ≥ 200 mA	37
General-purpose Schottky diodes ≤ 250 mA	38
Low-capacitance Schottky diodes	39
Zener diodes	40
General-purpose Zener diodes	40
Zener diodes specifications	41
Switching diodes	42
General-purpose, high-speed switching diodes < 90 V	42
General-purpose, high-speed switching diodes 100 V	42
General-purpose, switching diodes ≥ 100 V	43
PN-rectifier	43
Controlled-avalanche switching diodes	44
Low-leakage current-switching diodes	44

ESD protection, TVS, filtering and signal conditioning 45

Ultra low-capacitance ESD protection devices	49
Low-capacitance ESD protection devices	53
Standard ESD protection devices	57
Application-specific ESD and ESD/EMI solutions	59
USB 2.0 protection and filtering	59
Common Mode Filter for USB 2.0	59
USB 3.x and eSATA protection and filtering	60

Common Mode Filter for USB 3.x	61
Common Mode Filter for video interfaces	62
Ethernet protection	62
HDMI and memory-card signal conditioning	63
Video interface protection	64
NFC antenna protection	65
LCD/camera protection and filtering	66
Audio interface protection and filtering	67
Memory- and SIM-card protection and filtering	67
Automotive high-speed network protection	68
Automotive in-vehicle network bus line protection	68
Transient voltage suppressor (TVS) diodes	70
TVS diodes for mobile applications	70
TVS diodes, 24 / 40 W	70
TVS diodes, 400 W	71
TVS diodes, 600 W	72

MOSFETs 75

Small-signal MOSFETs	75
Small-signal MOSFETs in ultra-small DFN1006 and DFN1006B packages	78
Small-signal MOSFETs in DFN1010D-3 single and DFN1010B-3 dual package	79
Small-signal MOSFETs in DFN2020MD-6 single and DFN2020-6 dual packages	81
Small-signal MOSFETs in WLCSP4 and WLCSP6 packages	82
Automotive-compliant small-signal MOSFETs	84
Small-signal MOSFETs single (N-channel)	86
Small-signal MOSFETs single (P-channel)	88
Small-signal MOSFET – Schottky combination	88
Small-signal MOSFETs dual	90
Small-signal MOSFETs complementary	90
Power MOSFETs	92
Power MOSFETs 20 - 25 V	101
Power MOSFETs 30 V	102
Power MOSFETs 40 V	104
Power MOSFETs 55 - 60 V	105
Power MOSFETs 75 - 80 V	106
Power MOSFETs 100 V	107
Power MOSFETs 105 - 150 V	108
P channel	108
Multi-chip	108
Power MOSFETs 200 V	109
Automotive MOSFETs	110
Automotive-compliant small-signal MOSFETs	116
30 V N-channel automotive TrenchMOS	118
40 V N-channel automotive TrenchMOS	119
55 - 60 V N-channel automotive TrenchMOS	121
75 - 80 V N-channel automotive TrenchMOS	124
100 V N-channel automotive TrenchMOS	125
TrenchPLUS MOSFETs	128

Packages 130

Package details and packing methods	132
Package details and packing methods SMD	132
Package details and packing methods WLCSP	135
Packing details glass diodes, single ended and through hole packages	136
Package cross reference	137
Package cross reference list	137
Package cross reference matrix	141
Product orientation (tape and reel pack)	144
Packing methods	145
Tape and reel pack for SMD and WLCSP packages	145
Minimized outline drawings and reflow soldering footprint	146
Index	164

Our commitment: quality and reliability

AEC-Q101

- ▶ We qualify our products according to the automotive AEC-Q101 standard and even exceed it's requirements, for instance when doing extended lifetime testing.



- ▶ All our processes and manufacturing plants are subject to regular international and internal audits, including the following:
 - ▶ ISO9001
 - ▶ ISO/TS 16949 for automotive sites
 - ▶ ISO14001
 - ▶ OHSAS18001



- ▶ NXP's Design for Excellence (DfX) program ensures that each new development builds on past learning and that best practices are always employed. The result is continual product improvement.



- ▶ Zero defect is our goal. To ensure continuous improvement failure analysis and the determination to find root causes is performed at all stages of development and production by adoption of quality-analysis tools and methods (e.g. Six-Sigma, Safe-Launch).

Rigorous attention to detail and commitment to quality have yielded a very low product failure rate of a single-digit part per billion (ppb).



Bipolar transistors

High-power transistors 10

High-power transistors single	10
High-current, high-power transistors	10
High-power transistors double	10

Low V_{CEsat} (BISS) transistors 11

Low V_{CEsat} transistors up to 2000 mW	11
Low V_{CEsat} (BISS) transistors single NPN	11
Low V_{CEsat} (BISS) transistors single PNP	12
Low V_{CEsat} (BISS) double transistors	13
Low V_{CEsat} transistors up to 750 mW	14
Low V_{CEsat} (BISS) transistors single NPN	14
Low V_{CEsat} (BISS) transistors single PNP	15
Low V_{CEsat} (BISS) load switches	16
High-voltage low V_{CEsat} (BISS) transistors	18
Low V_{CEsat} (BISS) RETs	18
Low V_{CEsat} (BISS) transistor PNP – N-channel MOSFET combination	19
Advantages of low V_{CEsat} (BISS) technology	19

Resistor-equipped transistors (RETs) 20

RETs 100 mA single - Part 1	20
RETs 100 mA single - Part 2	20
RETs 100 mA double	21
RETs 500 mA	21

General purpose bipolar transistors 22

Single transistors NPN	22
Single transistors PNP	22
Double transistors	23
Single and double switching transistors	23
Medium-power general-purpose transistors	24
High-voltage transistors	24
LED driver	25
Constant-current source	25
Darlington transistors	26
Schmitt triggers	26
Low-noise transistors	26
Matched-pair transistors	27
MOSFET driver	28
Medium-frequency transistors	28

Bipolar transistors portfolio

What you get when you choose NXP for bipolar transistors

A comprehensive portfolio for all applications

Best in class performing transistors from general-purpose to low V_{CEsat} transistors


A broad range of packages

Many options for leaded SMD, medium-power clip-bond and ultra-small leadless packages.

A quality product from an experienced, high volume supplier

- ▶ NXP is strongly committed to automotive quality standards
- ▶ NXP has a track record of more than 60 years in developing and producing transistors
- ▶ NXP is the #1 in small-signal discretes with a high production capacity

Low V_{CEsat} (BISS) transistors

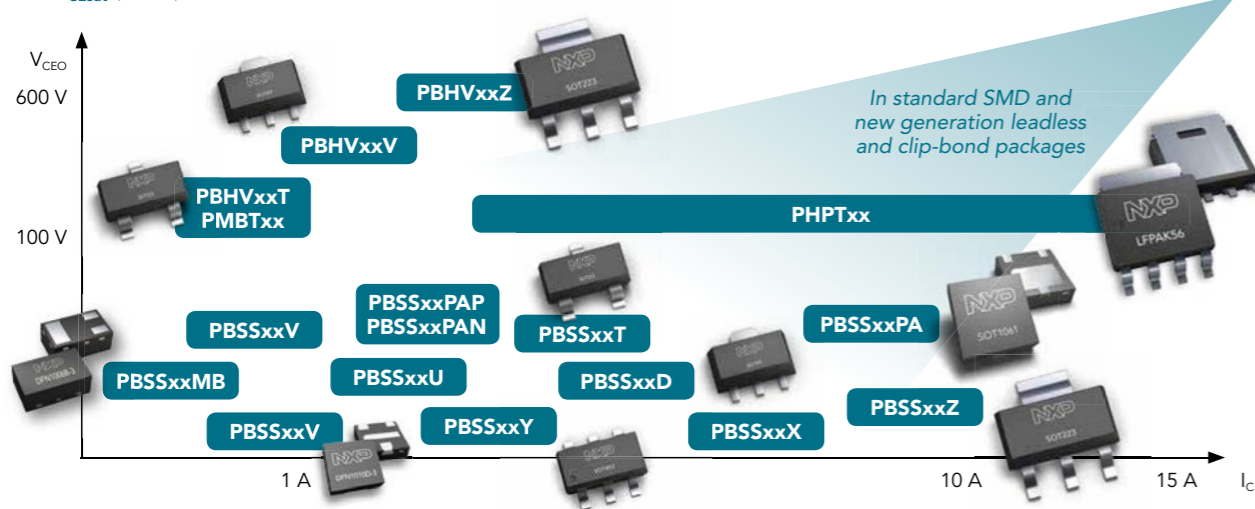

Medium-power Bipolar transistors in LFPAK56



LFPAK56 (SOT669)
Single package
5 x 6 x 1.1 mm



LFPAK56D (SOT1205)
Dual package
5 x 6 x 1.1 mm

Applications

- ▶ Power management
- ▶ Loadswitch
- ▶ Linear-mode voltage regulator
- ▶ Backlight units
- ▶ Motor drive
- ▶ LED lighting
- ▶ Relay replacement
- ▶ IGBT drive


In the spotlight

Bipolar transistors in LFPAK56 and LFPAK56D power packages

- High thermal power dissipation up to 3.7 W, V_{ce0} up to 100 V
- Most types AECQ-101 qualified ($I_C = 3$ A up to 15 A)
- 2 types in LFPAK56D with current gain matching of 5% and 10%
- Reduced PCB area requirements compared to transistors in DPAK
- Suitable for high-temperature applications up to 175 °C


LFPAK: Same power dissipation but half the size

55% package size reduction while retaining the same power performance

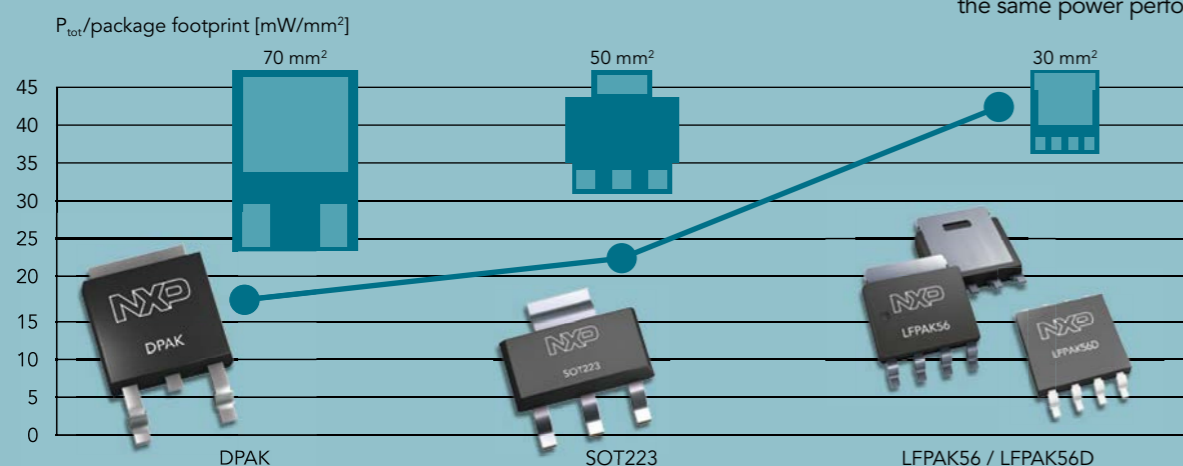


Reduced PCB area requirements comparison of DPAK, SOT223 and LFPAK


Motor drive (2x PHPT60603NY/PY) or a double LFPAK56D (PHPT610030NK/PK)

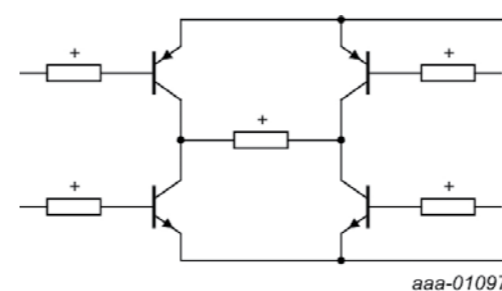


IVN – System Basis Chip (PHPT60603PY) External pass transistor, linear regulator

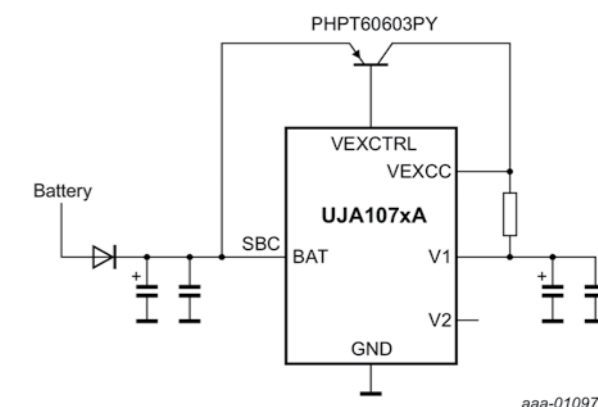


High-power transistors (single)

Package											LFPAK56 (SOT669)
											
Size (mm)											5 x 6 x 1.1
V _{CEO} (V)	I _C (A)	I _{CM} (A)	h _{FE} min/typ	@ I _C (A)	@ V _{CE} (V)	V _{CEsat} typ (mV); I _C = 0.5 A; I _B = 0.05 A	V _{CEsat} max (mV)	@ I _C (A)	@ I _B (A)	Polarity	
60	3	8	200 / 400	0.5	2	50	270	3	0.3	NPN	PHPT60603NY
			200 / 400	0.5	2	70	360	3	0.3	PNP	PHPT60603PY
150 / 250	0.5		10	50	330	3	0.3	NPN	PHPT61003NY		
150 / 220	0.5		10	70	360	2	0.2	PNP	PHPT61003PY		
100	3	6	150 / 250	0.5	10	50	300	2	0.2	NPN	PHPT61002NYC
			150 / 220	0.5	10	70	400	2	0.2	PNP	PHPT61002PYC

High-current, high-power transistors






Package						LFPAK56 (SOT669)
						
Size (mm)						5 x 6 x 1.1
V _{CEO} (V)	I _C (A)	h _{FE} min/typ	@ I _C (A)	@ V _{CE} (V)	Polarity	
40	6	200/400	0.5	2	NPN	PHPT60406NY
40	6	200/400	0.5	2	PNP	PHPT60406PY
40	10	200/400	0.5	2	NPN	PHPT60410NY
40	10	200/400	0.5	2	PNP	PHPT60410PY
40	15	200/400	0.5	2	NPN	PHPT60415NY
40	15	200/400	0.5	2	PNP	PHPT60415PY
60	6	200/400	0.5	2	NPN	PHPT60606NY
60	6	150/250	0.5	2	PNP	PHPT60606PY
60	10	200/400	0.5	2	NPN	PHPT60610NY
60	10	150/250	0.5	2	PNP	PHPT60610PY
100	6	150/250	0.5	10	NPN	PHPT61006NY
100	6	150/220	0.5	10	PNP	PHPT61006PY
100	10	150/250	0.5	10	NPN	PHPT61010NY
100	10	150/220	0.5	10	PNP	PHPT61010PY

High-power transistors (double)

Package												LFPAK56D (SOT1205)
												
Size (mm)												5 x 6 x 1.1
V _{CEO} (V)	I _C (A)	I _{CM} (A)	h _{FE} typ	@ I _C (A)	@ V _{CE} (V)	V _{CEsat} typ (mV); I _C = 0.5 A; I _B = 0.05 A	V _{CEsat} max (mV)	@ I _C (A)	@ I _B (A)	Polarity	h _{FE1} /h _{FE2}	
100	3	6	150	0.5	10	50	300	3	0.2	2XNPN	-	PHPT610030NK
						70	400	3	0.2	2XPNP	-	PHPT610030PK
						50 / 70	300 / 400	3	0.2	NPN/PNP	-	PHPT61003NPK
						50	300	3	0.2	2XNPN	0.95	PHPT610035NK
						70	400	3	0.2	2XPNP	0.9	PHPT610035PK


Low V_{CEsat} (BISS) transistors single NPN

types in **bold** represent new products

Package							SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
											
Size (mm)							6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P _{tot} (mW)							1700	1650	750	1300	1300
V _{CEO} (V)	I _C (A)	I _{CM} (A)	h _{FE} min/typ	@ I _C (A)	@ V _{CE} (V)	V _{CEsat} typ (mV); I _C = 0.5 A; I _B = 0.05 A					
12	5.3	10.6	300 / 530	0.5	2	18					
	5.8	11.6	300 / 530	0.5	2	18	PBSS301NZ				
	6	7	280 / 440	0.5	2	20					PBSS4612PA
20	3	5	220 / 390	0.5	2	40			PBSS4320X		
	4	15	300 / 450	0.5	2	30				PBSS301ND	
	5	10	300 / 450	0.5	2	35			PBSS4520X		
	5.3	10.6	300 / 570	0.5	2	20			PBSS302NX		
	5.8	10.2	300 / 570	0.5	2	20	PBSS302NZ				
	6	7	280 / 440	0.5	2	20					PBSS4620PA
	7	15	300 / 550	0.5	2	12			PBSS4021NX		
	8	20	300 / 550	0.5	2	9	PBSS4021NZ				
	3	5	300 / 490	0.5	2	45			PBSS4330X		
	3	5	300 / 465	0.5	2	40					PBSS4330PA
30	3.5	6	300 / 500	0.5	2	70				PBSS4032ND ³⁾	
	4.7	10	300 / 500	0.5	2	57			PBSS4032NX ³⁾		
	5.1	10.2	300 / 480	0.5	2	20			PBSS303NX		
	5.4	10	300 / 500	0.5	2	57	PBSS4032NZ ³⁾				
	5.5	11	300 / 480	0.5	2	20	PBSS303NZ				
	6	7	280 / 450	0.5	2	21					PBSS4630PA
	2.0	3.0	300 / -	0.5	5	140			PBSS4240X		
40	4	15	300 / 520	0.5	2	35				PBSS302ND	
	4	10	300 / 500	0.5	2	21			PBSS4540X		
	5	10	300 / 500	0.5	2	25	PBSS4540Z				
50	2	5	300 / -	0.5	2	90 ²⁾			PBSS4250X		
	3.0	5.0	200 / 280	0.5	2	65				PBSS4350D	
	3.0	5.0	300 / 460	0.5	2	50			PBSS4350X		
60	3	6	200 / 360	0.5	5	45					PBSS4360PAS
	3	6	200 / -	0.5	5	45	PBSS4360Z				
	3.45	5.7	345 / 570	0.5	2	40				PBSS303ND	
	4.7	9.4	300 / 520	0.5	2	25			PBSS304NX		
	5.2	10.4	300 / 520	0.5	2	25	PBSS304NZ				
	6	7	280 / 440	0.5	2	22					PBSS4560PA
	6.2	15	300 / 500	0.5	2	17			PBSS4041NX		
	7	15	300 / 500	0.5	2	13	PBSS4041NZ				
	3	6	240 / 360	0.5	2	40				PBSS304ND	
	4	10	250 / 400	0.5	2	25			PBSS4480X		
80	4.6	9.2	300 / 470	0.5	2	25			PBSS305NX		
	5.1	10.2	300 / 470	0.5	2	25	PBSS305NZ				
	5.6	7	270 / 425	0.5	2	25					PBSS4580PA
100			150 / 290	0.25	10	75				PBSS8110D	
			150 / 290	0.25	10	73				PBSS8110X	
			150 / 290	0.25	10	73	PBSS8110Z				
	3	4	170 / 275	0.5	2	45				PBSS305ND	
	4.5	9	200 / 330	0.5	2	27			PBSS306NX		
	5.1	10.2	200 / 330	0.5	2	27	PBSS306NZ				
5.2	6	180 / 285	0.5	2	30					PBSS8510PA	

¹⁾ I_C / I_B = 20 ²⁾ V_{CEsat} (max) ³⁾ Optimized for high-speed switching

Nomenclature for high-power transistors

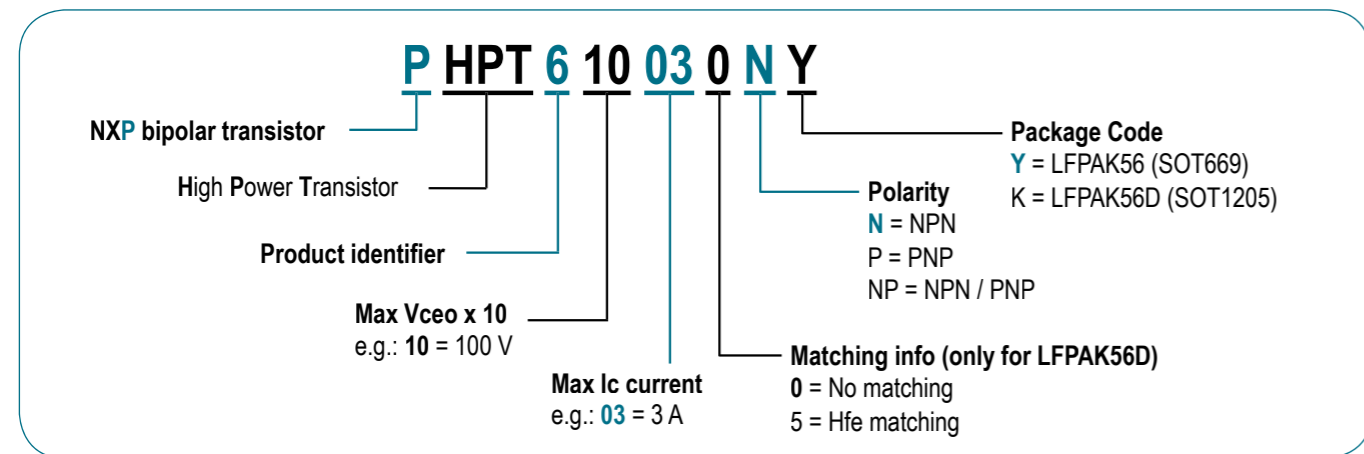

Low V_{CEsat} (BISS) transistors single NPN

Package		SOT23	SOT323 (SC-70)	SOT363 (SC-88)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010D-3 (SOT1215)
Size (mm)		2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)		480	350	430	250	250	750
V_{CE0} (V)	I_c (A)	I_{CM} (A)	h_{FE} min/typ	@ I_c (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); $I_c = 0.5$ A; $I_B = 0.05$ A	
15	0.5	1	200 / 325	0.01	2	-	PBSS2515M PBSS2515MB
20	1	3	350 / 470	0.1	2	110 ²⁾	PBSS4120T
	2	5	220 / 330	0.1	2	45	PBSS4320T
	4.3	8	300 / 550	0.5	2	21	PBSS4021NT
30	1	1.5	230 / 380	0.5	2	90	PBSS4130QA
		3	300 / 450	0.5	2	120 ²⁾	PBSS4130T
	2	3	300 / 450	0.5	2	70	PBSS4230T
			230 / 380	0.5	2	75	PBSS4230QA
	2.6	5	300 / 500	0.5	2	80	PBSS4032NT ³⁾
40	0.5	1	200 / 550	0.01	2	200 ²⁾	PBSS2540M PBSS2540MB
			300 / 440	0.5	5	130	PBSS4140U
	2.0		300 / 510	0.5	5	120	PMMT491A
			300 / 420	0.5	5	130	PBSS4140T
	3.0		350 / 470	0.1	2	70	PBSS4240Y
			300 / 450	0.5	2	70	PBSS4240T
50	2	5	300 / 495	0.5	2	60	PBSS4350T
60	1.0	1.5	150 / 240	0.5	2	90	PBSS4160QA
			200 / 420	0.5	5	120	PBSS4160U
			200 / 350	0.5	5	110	PBSS4160T
	2	3	150 / 240	0.5	2	75	PBSS4260QA
	3.8	8	300 / 500	0.5	2	29	PBSS4041NT
100	1.0	3.0	150 / 400	0.25	10	80	PBSS8110Y
			150 / 300	0.25	10	70	PBSS8110T

¹⁾ $I_c / I_B = 20$ ²⁾ V_{CEsat} (max) ³⁾ Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors single PNP

Package		SOT23	SOT323 (SC-70)	SOT363 (SC-88)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010D-3 (SOT1215)
Size (mm)		2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)		480	350	430	250	250	750
V_{CE0} (V)	I_c (A)	I_{CM} (A)	h_{FE} min/typ	@ I_c (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); $I_c = 0.5$ A; $I_B = 0.05$ A	
15	0.5	1	200 / 260	0.01	2	150	PBSS3515M PBSS3515MB
20	1	2	300 / 450	0.1	2	125 ²⁾	PBSS5120T
		3	225 / -	0.5	2	80 ²⁾	PBSS5220T
		5	220 / 420	0.5	2	50	PBSS5320T
	3.5	8	250 / 400	0.5	2	35	PBSS4021PT
30	1	1.5	180 / 295	0.5	2	85	PBSS5130QA
			260 / 350	0.5	2	110	PBSS5130T
	2	3	300 / 450	0.1	2	70	PBSS5230T
			180 / 295	0.5	2	70	PBSS5230QA
	2.4	5	200 / 320	0.5	2	95	PBSS4032PT ³⁾
40	0.5	1	200 / 380	0.01	2	220	PBSS3540M PBSS3540MB
			300 / 520	0.1	5	130	PBSS5140U
	1.0	2.0	300 / 800	0.1	5	130	PMMT591A
			300 / 510	0.1	5	130	PBSS5140T
			300 / -	0.1	2	110 ²⁾	PBSS5240Y
			300 / 450	0.1	2	70	PBSS5240T
50	2.0	3	200 / -	0.5	2	90 ²⁾	PBSS5250T
		5	200 / 360	0.5	2	55	PBSS5350T
60	1.0	1.5	120 / 185	0.5	2	125	PBSS5160QA
			150 / 250	0.5	5	135	PBSS5160U
			150 / 250	0.5	5	120	PBSS5160T
	1.7	2.5	120 / 185	0.5	2	105	PBSS5260QA
	2.7	8	200 / 300	0.5	2	49	PBSS4041PT
100	1.0	3.0	150 / -	0.25	5	93	PBSS9110Y
			150 / 350	0.5	5	95	PBSS9110T

¹⁾ $I_c / I_B = 20$ ²⁾ V_{CEsat} (max) ³⁾ Optimized for high-speed switching

In the spotlight

Low V_{CEsat} transistors in DFN1010D-3: 2 A on 1.1 mm² footprint

High I_c performance on ultra-small footprint




V_{CE} 30 V and 60 V

Leadless DFN1010D-3 (SOT1215) SMD package with solderable sidepads (1.1 x 1.0 x 0.37)

AEC-Q101 qualified



Low V_{CEsat} (BISS) load switches

Package				SOT457 (SC-74)	SOT363 (SC-88)			
Size (mm)				2.9 x 1.5 x 1.0				
P_{tot} (mW)				750 ¹⁾	600 ¹⁾			
V_{CEO} (V)	I_C (A)	V_{CEsat} max (mV); $I_C = 0.5$ A; $I_B = 0.05$ A	R1, R2 (k Ω)	  				
15	0.5	250	2.2	PBL1501Y				
			4.7	PBL1502Y				
			10	PBL1503Y				
			22	PBL1504Y				
20	1	150	2.2	PBL2001D				
			4.7	PBL2002D				
			10	PBL2003D				
			22	PBL2004D				
	1.8	70	2.2	PBL2021D				
			4.7	PBL2022D				
			10	PBL2023D				
			22	PBL2024D				
40	0.5	350	2.2	PBL4001Y				
			4.7	PBL4002Y				
			10	PBL4003Y				
			22	PBL4004Y				
	1	170	47	PBL4005Y				
			2.2	PBL4001D				
			4.7	PBL4002D				
			10	PBL4003D				
			22	PBL4004D				
			47	PBL4005D				
			60	1	180	2.2	PBL6001D	
						4.7	PBL6002D	
10	PBL6003D							
22	PBL6004D							
1.5	100	47		PBL6005D				
		2.2		PBL6021D				
		4.7		PBL6022D				
		10		PBL6023D				
22	PBL6024D							

¹⁾ Device mounted on a ceramic PCB, Al₂O₃, standard footprint

²⁾ Device mounted on an FR4 PCB, single-sided copper, tin-plated, and standard footprint


Key features and benefits

- ▶ Very small input current drives high load current
- ▶ High efficiency and low-voltage drop due to low V_{CEsat} (BISS) pass transistor
- ▶ Replaces expensive P-MOSFETs
- ▶ Inherent reverse-current blocking
- ▶ Automotive qualified according to AEC-Q101

Key applications

- ▶ Fan driver
- ▶ Battery-charge switch
- ▶ Supply-line switch
- ▶ High-side load

Low V_{CEsat} (BISS) load switch – the optimal choice for supply-line and high-side switches

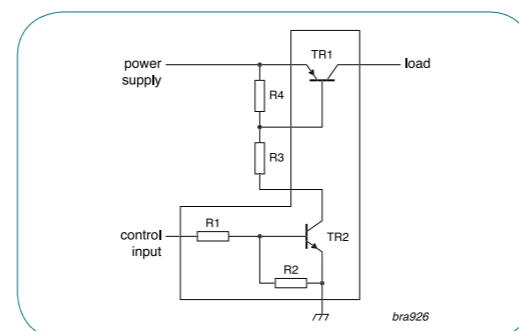

DFN2020D-6 with solderable sidepads

Application example: LED lighting in automotive




PBSS5160PAPS in DFN2020D-6

- ▶ Industry's first low V_{CEsat} transistor in DFN2020 with 100% solderable sidepads, AOI suitable
- ▶ Enables individual dimming in the LED front light matrix solution
- ▶ Saves PCB space by replacing two DFN2020D-3 or two SOT89 packages
- ▶ Ideal solution for multilayer PCB designs

Key package benefits

- ▶ AEC-Q101 qualified
- ▶ Suitable for AOI of solder joints
- ▶ Exposed heat sink for excellent thermal and electrical conductivity
- ▶ Package size of only 2 x 2 mm and a height of only 0.62 mm
- ▶ Single version available in DFN2020D-3
- ▶ DFN2020 is an approved and widely available package platform

Dimming transistor application

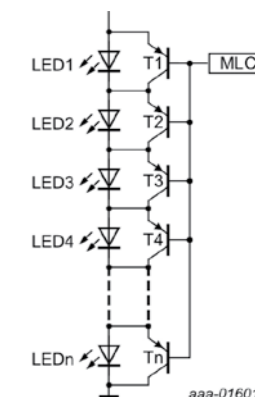

Low V_{CEsat} double transistors portfolio on DFN2020D-6

types in **bold** represent new products

V_{CEO} (V)	I_C (A)	Polarity	h_{FE} min	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); $I_C = 0.5$ A; $I_B = 0.05$ A	Product
20	2	NPN / NPN	230	0.5	2	60	PBSS4220PANS
		PNP / PNP	210	0.5	2	70	PBSS5220PAPS
60	1	NPN / NPN	150	0.5	2	90	PBSS4160PANS
		PNP / PNP	120	0.5	2	125	PBSS5160PAPS
60	2	NPN / NPN	150 / 120	0.5	2	90 / 125	PBSS4160PANPS
		NPN / NPN	210	0.5	2	70	PBSS4260PANS
60	2	PNP / PNP	140	0.5	2	100	PBSS5260PAPS
		NPN / PNP	210 / 140	0.5	2	70 / 100	PBSS4260PANPS


High-voltage low V_{CEsat} (BISS) transistors

types in **bold** represent new products

Package			SOT223 (SC-73)	SOT89 (SC-62)	SOT1215	SOT23
Size (mm)			6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	1.1 x 1.0 x 0.37	2.9 x 1.3 x 1.0
P _{tot} (mW)			1700	1300	750	250
Polarity	V _{CEO} (V)	I _C (A)				
NPN	150	0.5			PBHV8115QA	
		1	PBHV8115Z	PBHV8115X		PBHV8115T
		2	PBHV8215Z			
	180	1				PBHV8118T
		400	0.5	PBHV8540Z	PBHV8540X	
	500	1	PBHV8140Z			
PNP	140	0.5			PBHV9115QA	
		1	PBHV9115Z	PBHV9115X		PBHV9115T
	150	2	PBHV9215Z			
		0.5	PBHV9560Z			
	600	0.1	PBHV3160Z			
		0.25	PBHV9040Z	PBHV9040X		PBHV9040T
	400	0.5	PBHV9540Z			
		0.15	PBHV3160Z			PBHV9050T
	500	0.25	PBHV9050Z			

Low V_{CEsat} (BISS) transistor PNP – N-channel MOSFET combination

Package											DFN2020-6 (SOT1118)
Size (mm)											2.0 x 2.0 x 0.62
P _{tot} (mW)											1300
V _{CEO} (V)	I _C (A)	h _{FE min}	h _{FE max}	@ I _C (mA)	@ V _{CE} (V)	R _{CEsat} typ (mΩ)	V _{DS} (V)	V _{GS} (V)	I _D (A)	R _{Dson} typ (mΩ)	
40	2	300	800	100	5	240	30	0.7	0.66	390	PBSM5240PF
		100	-	100	5	240	30	0.7	0.66	390	PBSM5240PFH

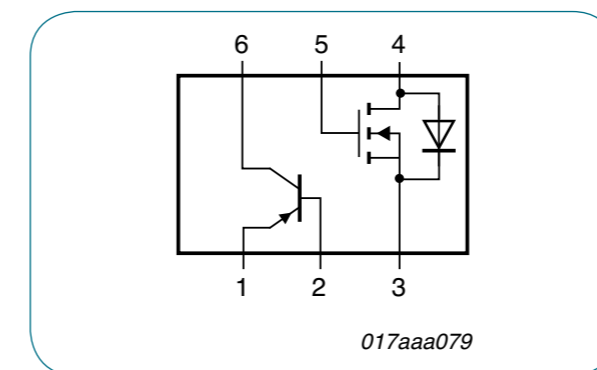

Combination of low V_{CEsat} transistor with N-channel MOSFET in the very small and ultrathin leadless package DFN2020-6 (SOT1118)

In the spotlight

High-voltage low V_{CEsat} (BISS) transistors in SOT223, SOT23 & SOT89

- Voltage V_{CEO} up to 600 V
- Current I_C up to 4 A (continuous), 10 A (peak)
- V_{CEsat} down to 33 mV
- AEC-Q101 qualified
- New high-voltage low V_{CEsat} (BISS) in DFN1010D-3



Low V_{CEsat} (BISS) RETs


Package					SOT23	
Size (mm)					2.9 x 1.3 x 1.0	
P _{tot} (mW)					250	
V _{CEO} (V)	I _C (mA)	R1 = R2	R1 (kΩ)	R2 (kΩ)	NPN	PNP
40	600	R1 = R2	1	1	PBRN113ET	PBRP113ET
			2.2	2.2	PBRN123ET	PBRP123ET
		R1 ≠ R2	1	10	PBRN113ZT	PBRP113ZT
			2.2	10	PBRN123YT	PBRP123YT

Advantages of low V_{CEsat} (BISS) technology




Our BISS (Breakthrough In Small-Signal) transistors show lowest V_{CEsat} values due to an innovative mesh-emitter technology and further technology improvement. They also reduce board space due to improved collector-current capabilities as shown below.

Improved collector-current capabilities

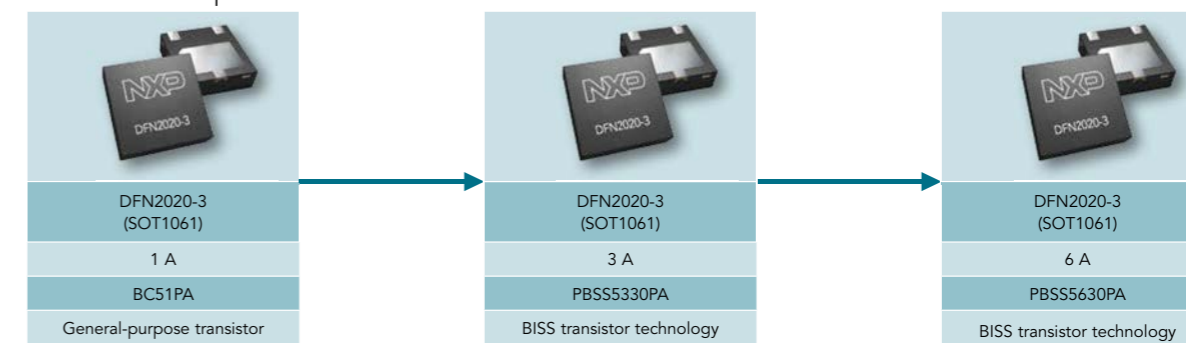▶ 17.87 mm² footprint







RETs 100 mA single - Part 1

Package					SOT23		SOT323 (SC-70)			
										
Size (mm)					2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95			
P _{tot} (mW)					250		200			
V _{CE0} (V)	I _C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN	PNP	NPN	PNP		
50	100		1	1		PDTA113ET	PDTA113EU		PDTA113EU	
			2.2	2.2	PDTC123ET	PDTA123ET	PDTC123EU	PDTA123EU		PDTA123EU
			4.7	4.7	PDTC143ET	PDTA143ET	PDTC143EU	PDTA143EU		PDTA143EU
			10	10	PDTC114ET	PDTA114ET	PDTC114EU	PDTA114EU		PDTA114EU
			22	22	PDTC124ET	PDTA124ET	PDTC124EU	PDTA124EU		PDTA124EU
			47	47	PDTC144ET	PDTA144ET	PDTC144EU	PDTA144EU		PDTA144EU
			100	100	PDTC115ET	PDTA115ET	PDTC115EU	PDTA115EU		PDTA115EU
			1	10		PDTA113ZT		PDTA113ZU		PDTA113ZU
			2.2	10	PDTC123YT	PDTA123YT	PDTC123YU	PDTA123YU		PDTA123YU
			2.2	47	PDTC123JT	PDTA123JT	PDTC123JU	PDTA123JU		PDTA123JU
		4.7	10	PDTC143XT	PDTA143XT	PDTC143XU	PDTA143XU		PDTA143XU	
		4.7	47	PDTC143ZT	PDTA143ZT	PDTC143ZU	PDTA143ZU		PDTA143ZU	
		10	47	PDTC114YT	PDTA114YT	PDTC114YU	PDTA114YU		PDTA114YU	
		22	47	PDTC124XT	PDTA124XT	PDTC124XU	PDTA124XU		PDTA124XU	
		47	10	PDTC144VT	PDTA144VT	PDTC144VU	PDTA144VU		PDTA144VU	
		47	22	PDTC144WT	PDTA144WT	PDTC144WU	PDTA144WU		PDTA144WU	
		2.2	-	PDTC123TT	PDTA123TT	PDTC123TU	PDTA123TU		PDTA123TU	
		4.7	-	PDTC143TT	PDTA143TT	PDTC143TU	PDTA143TU		PDTA143TU	
		10	-	PDTC114TT	PDTA114TT	PDTC114TU	PDTA114TU		PDTA114TU	
		22	-	PDTC124TT	PDTA124TT	PDTC124TU	PDTA124TU		PDTA124TU	
47	-	PDTC144TT	PDTA144TT	PDTC144TU	PDTA144TU		PDTA144TU			
100	-	PDTC115TT	PDTA115TT	PDTC115TU	PDTA115TU		PDTA115TU			




RETs 100 mA single - Part 2

types in **bold** represent new products

Package					DFN1006-3 (SOT883)		DFN1006B-3 (SOT883B)		SOT1215	
										
Size (mm)					1.0 x 0.6 x 0.48		1.0 x 0.6 x 0.37		1.1 x 1.0 x 0.37	
P _{tot} (mW)					250		250		750	
V _{CE0} (V)	I _C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN	PNP	NPN	PNP	NPN	PNP
50	100		1	1		PDTA113EM	PDTA113EMB	PDTA113EMB		
			2.2	2.2	PDTC123EM	PDTA123EM	PDTC123EMB	PDTA123EMB		
			4.7	4.7	PDTC143EM	PDTA143EM	PDTC143EMB	PDTA143EMB	PDTC143EQA	PDTA143EQA
			10	10	PDTC114EM	PDTA114EM	PDTC114EMB	PDTA114EMB	PDTC114EQA	PDTA114EQA
			22	22	PDTC124EM	PDTA124EM	PDTC124EMB	PDTA124EMB	PDTC124EQA	PDTA124EQA
			47	47	PDTC144EM	PDTA144EM	PDTC144EMB	PDTA144EMB	PDTC144EQA	PDTA144EQA
			100	100	PDTC115EM	PDTA115EM	PDTC115EMB	PDTA115EMB		
			1	10		PDTA113ZM		PDTA113ZMB		
			2.2	10	PDTC123YM	PDTA123YM	PDTC123YMB	PDTA123YMB		
			2.2	47	PDTC123JM	PDTA123JM	PDTC123JMB	PDTA123JMB	PDTC123XQA	PDTA123XQA
		4.7	10	PDTC143XM	PDTA143XM	PDTC143XMB	PDTA143XMB	PDTC143XQA	PDTA143XQA	
		4.7	47	PDTC143ZM	PDTA143ZM	PDTC143ZMB	PDTA143ZMB	PDTC143ZQA	PDTA143ZQA	
		10	47	PDTC114YM	PDTA114YM	PDTC114YMB	PDTA114YMB	PDTC114YQA	PDTA114YQA	
		22	47	PDTC124XM	PDTA124XM	PDTC124XMB	PDTA124XMB			
		47	10	PDTC144VM	PDTA144VM	PDTC144VMB	PDTA144VMB			
		47	22	PDTC144WM	PDTA144WM	PDTC144WMB	PDTA144WMB			
		2.2	-	PDTC123TM	PDTA123TM	PDTC123TMB	PDTA123TMB			
		4.7	-	PDTC143TM	PDTA143TM	PDTC143TMB	PDTA143TMB			
		10	-	PDTC114TM	PDTA114TM	PDTC114TMB	PDTA114TMB			
		22	-	PDTC124TM	PDTA124TM	PDTC124TMB	PDTA124TMB			
47	-	PDTC144TM	PDTA144TM	PDTC144TMB	PDTA144TMB					
100	-	PDTC115TM	PDTA115TM	PDTC115TMB	PDTA115TMB					





RETs 100 mA double

types in **bold** represent new products

Package					DFN1010B-6 (SOT1216)			SOT363 (SC-88)			SOT666				
															
Size (mm)					1.1 x 1.0 x 0.37			2.0 x 1.25 x 0.95			1.6 x 1.2 x 0.55				
P _{tot} (mW)					350			300			300				
V _{CE0} (V)	I _C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP		
50	100	R1 = R2	2.2	2.2					PUMH20	PUMD20	PUMB20	PEMH20	PEMD20	PEMB20	
			4.7	4.7					PUMH15	PUMD15	PUMB15	PEMH15	PEMD15	PEMB15	
			10	10	PQMH11	PQMD3	PQMB11			PUMH11	PUMD3	PUMB11	PEMH11	PEMD3	PEMB11
			22	22		PQMD2				PUMH1	PUMD2	PUMB1	PEMH1	PEMD2	PEMB1
			47	47	PQMH2	PQMD12				PUMH2	PUMD12	PUMB2	PEMH2	PEMD12	PEMB2
			100	100						PUMH24	PUMD24	PUMB24	PEMH24	PEMD24	PEMB24
			2.2	47	PQMH10	PQMD10				PUMH10	PUMD10	PUMB10	PEMH10	PEMD10	PEMB10
			4.7	10						PUMH18	PUMD18	PUMB18	PEMH18	PEMD18	PEMB18
			4.7	47	PQMH13	PQMD13				PUMH13	PUMD13	PUMB13	PEMH13	PEMD13	PEMB13
			10	47	PQMH9					PUMH9	PUMD9	PUMB9	PEMH9	PEMD9	PEMB9
		22	47		PQMD16				PUMH16	PUMD16	PUMB16	PEMH16	PEMD16	PEMB16	
		47	22						PUMH17	PUMD17	PUMB17	PEMH17	PEMD17	PEMB17	
		47 / 2.2	47 / 47						PUMD48				PEMD48		
		2.2	-						PUMH30	PUMD30	PUMB30	PEMH30	PEMD30	PEMB30	
		4.7	-						PUMH7	PUMD6	PUMB3	PEMH7	PEMD6	PEMB3	
		10	-						PUMH4	PUMD4	PUMB4	PEMH4	PEMD4	PEMB4	
		22	-						PUMH19	PUMD19	PUMB19	PEMH19	PEMD19	PEMB19	
		47	-						PUMH14	PUMD14	PUMB14	PEMH14	PEMD14	PEMB14	

RETs 500 mA

types in **bold** represent new products

Package					SOT457 (SC-74)		SOT23		SOT323 (SC-70)		SOT1215			
														
Size (mm)					2.9 x 1.5 x 1.0		2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95		1.1 x 1.0 x 0.37			
P _{tot} (mW)					750		250		200		750			
V _{CE0} (V)	I _C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN / NPN	NPN / PNP	NPN	PNP	NPN	PNP	NPN	PNP		
50	500	R1 = R2	1	1				PDTD113ET	PDTB113ET	PDTD113EU	PDTB113EU	PDTD113EQA	PDTB113EQA	
			2.2	2.2					PDTD123ET	PDTB123ET	PDTD123EU	PDTB123EU	PDTD123EQA	PDTB123EQA
			4.7	4.7					PDTD143ET	PDTB143ET	PDTD143EU	PDTB143EU	PDTD143EQA	PDTB143EQA
			10	10					PDTD114ET	PDTB114ET	PDTD114EU	PDTB114EU	PDTD114EQA	PDTB114EQA
			22	22					PDTD113ZT	PDTB113ZT	PDTD113ZU	PDTB113ZU	PDTD113ZQA	PDTB113ZQA
		R1 ≠ R2	2.2	10					PDTD123YT	PDTB123YT	PDTD123YU	PDTB123YU	PDTD123YQA	PDTB123YQA
			4.7	10					PDTD143XT	PDTB143XT	PDTD143XU	PDTB143XU	PDTD143XQA	PDTB143XQA
			10	10										
			22	22										
			47	47										
Only R1	2.2	-					PDTD123TT	PDTB123TT						

Single transistors NPN

types in **bold** represent new products

Package		SOT23	SOT323 (SC-70)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)			
Size (mm)		2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37			
P _{tot} (mW)		250	200	750	250	250			
V _{CEO} (V)	I _C (mA)	h _{FE} min/typ	h _{FE} max	f _T min (MHz)					
25	100	450	1200	100					
30	100	110 - 200	450 - 800	100	BC848B	PMST5089			
		350	900	100	BC848W	PMST5088			
32	100	110 - 420	220 - 800	100	BCW31 / 32 / 33				
		180 - 380	310 - 630	250	BCW60B / C / D				
45	100	110 - 420	220 - 800	100	BC847 / A / B / C	BC847W / AW / BW / CW	BC847AQA / BQA / CQA	BC847AM / BM / CM	BC847AMB / BMB / CMB
		120 - 380	220 - 630	100	BCX70G / H / J / K				
		110 - 200	220 - 450	100	BCW71 / 72				
50	100	210 - 290	340 - 460	100 - 150	2PD601ART 2PD601ARL 2PD601ASL	2PD601ARW / SW			
		250	650	100	PMBT6428	PMST6428			
60	100	110 - 200	220 - 450	100	BCV71 / 72				
65	100	110 - 200	220 - 450	100	BC846 / A / B	BC846W / AW / BW	BC846BM	BC846BMB	
80	100	20	80	60	BSS64				
50	150	120 - 200	240 - 400	80	NXP3875Y / G				
	150	120 - 270	270 - 560	100		2PC4081Q / R / S	2PC4617QM / RM	2PC4617QMB / RMB	
	200	210	340	100	2PD601BRL				
45	500	100 - 250	250 - 600	100	BC817 / -16 / -25 / -40	BC817W / -16W / -25W / -40W	BC817 / -25QA / -40QA		
		100	600	100	BCX19				
50	500	85 - 170	170 - 340	140 - 180	2PD602AQL 2PD602ARL 2PD602ASL	2PD1820AR / S			
60	500	50	-	100		PMSTA05			
80	500	100	-	50		PMSTA06			

Single transistors PNP

types in **bold** represent new products

Package		SOT23	SOT323 (SC-70)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)			
Size (mm)		2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37			
P _{tot} (mW)		250	200	750	250	250			
V _{CEO} (V)	I _C (mA)	h _{FE} min/typ	h _{FE} max	f _T min (MHz)					
30	100	125 - 220	500 - 800	100	BC858B	BC858W			
32	100	120 - 215	260 - 500	100	BCW29 / 30				
		180 - 380	310 - 630	100	BCW61B / C / D				
45	100	210 - 290	340 - 460	70 - 80	2PB709ART 2PB709ARL 2PB709ASL	2PB709ARW / SW			
		180 - 380	310 - 630	100	BCX71H / J / K				
		120 - 215	260 - 500	100	BCW69 / 70				
60	100	125 - 420	250 - 800	100	BC857 / A / B / C	BC857W / AW / BW / CW	BC857AQA / BQA / CQA	BC857AM / BM / CM	BC857AMB / BMB / CMB
		120	260	150	BCW89				
65	100	125 - 200	250 - 475	100	BC856 / A / B	BC856W / AW / BW	BC856BM	BC856BMB	
100	100	30	-	50	BSS63				
50	150	120 - 270	270 - 560	100		2PA1756Q / R / S		2PA1774QMB / RMB / SMB	
	200	210	340	100	2PB709BRL				
25	500	290	460	100	2PB709BSL				
		100	600	80	BCX18				
45	500	100 - 250	250 - 600	80	BC807 / -16 / -25 / -40	BC807W / -16W / -25W / -40W	BC807 / -25QA / -40QA		
		100	600	80	BCX17				
50	500	85 - 170	170 - 340	100 - 140	2PB710ARL 2PB710ASL	2PB1219AQ / R / S			
60	500	100	-	50		PMSTA55			
80	500	100	-	50		PMSTA56			

Double transistors

Package		SOT457 (SC-74)	SOT363 (SC-88)	SOT666	DFN1010B-6 (SOT1216)				
Size (mm)		2.9 x 1.5 x 1.0	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.0 x 1.0 x 0.37				
P _{tot} (mW)		750	300	300	350				
Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)				
NPN	40	100	120	450	100		PUMX1	PEMX1	
	45	100	200	450	100	BC847DS	BC847BS	BC847BV	BC847QAS
	65	100	110	-	100		BC846S		
			200	450	100	BC846DS	BC846BS		
PNP	50	150	120	560	100		PUMX2		
	45	500	160	400	80	BC817DS			
	40	100	120	450	100	PIMT1	PUMT1	PEMT1	
NPN / PNP	45	100	200	450	100		BC857BS	BC857BV	BC857QAS
	65	100	110	-	100		BC856S		
	200	450	100				BC856BS		
NPN / PNP	45	500	160	400	80	BC807DS			
	40	100	120	450	100		PUMZ1	PEMZ1	
	45	100	200	450	100		BC847BPN	BC847BVN	BC847QAPN
	50	100	120	560	100	PIMZ2	PUMZ2		
	65	100	200	450	100		BC846BPN		
12	500	200	-	250 / 100			PEMZ7		
45	500	160	160	100 / 800		BC817DPN			

Single and double switching transistors

types in **bold** represent new products

Package		SOT223 (SC-73)	SOT89 (SC-62)	SOT23	SOT323 (SC-70)	SOT363 (SC-88)	SOT666	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)				
Size (mm)		6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37				
P _{tot} (mW)		1700	1300	250	200	300	300	250	250				
Configuration		single	single	single	single	double	double	single	single				
Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)	t _{off} (ns)							
NPN	12	100	40	120	400	20		BSV52					
	40	200	100	300	180	1200		PMBS3904	PMSS3904				
					300	250							
	15	600	40	120	500	20		PMBT2369	PMST2369				
	40	200	100	300	300	250		MMBT3904					
	30	600	100	300	250	250		PMBT3904	PMST3904	PMBT3904YS	PMBT3904VS	PMBT3904M	PMBT3904MB
								PMST2222	PMST2222				
	40	600	100	300	300	250	PZT4401	PXT4401	PMBT4401	PMST4401	PMBT4401YS		
									MMBT2222A				
	40	800	100	300	300	250	PZT2222A	PXT2222A	PMBT2222A	PMST2222A	PMBT2222AYS		
								BSR14					
PNP	40	100	100	300	150	700		PMBS3906	PMSS3906				
	40	200	100	300	250	300		MMBT3906					
								PMBT3906	PMST3906	PMBT3906YS	PMBT3906VS	PMBT3906M	PMBT3906MB
	40	600	100	300	200	350	PZT4403	PXT4403	PMBT4403	PMST4403	PMBT4403YS		
									PMBT2907				
60	600	100	300	200	365			BSR16	PMST2907A				
NPN / PNP	40	200	100	300	300 / 250	250 / 300	PZT2907A	PXT2907A	PMBT2907A		PMBT2907AYS		
											PMBT3946YPN	PMBT3946VFN	

Medium-power general-purpose transistors


Package						SOT223 (SC-73)	SOT89 (SC-62)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P _{tot} (mW)						1700	1300	1300	1300
Polarity	V _{CEO} (V)	I _C (A)	h _{FE} min	h _{FE} max	f _T min (MHz)				
NPN	20	2	85 - 160	375	40	BCP68 / -25	BC868 / -25	BC68PA / BC68-25PA	BC68PAS / BC68-25PAS
	45	1	63 - 100	160 - 250	100	BCP54 / -10 / -16	BCX54 / -10 / -16	BC54PA / BC54-10PA / BC54-16PA	BC54PAS / BC54-10PAS / BC54-16PAS
	60	1	63 - 100	160 - 250	100	BCP55 / -10 / -16	BCX55 / -10 / -16	BC55PA / BC55-10PA / BC55-16PA	BC55PAS / BC55-10PAS / BC55-16PAS
	80	1	63 - 100	160 - 250	100	BCP56 / -10 / -16	BCX56 / -10 / -16	BC56PA / BC56-10PA / BC56-16PA	BC56PAS / BC56-10PAS / BC56-16PAS
PNP	20	2	85 - 160	250 - 375	40	BCP69 / -16 / -25	BC869 / -16 / -25	BC69PA / BC69-16PA / BC69-25PA	BC69PAS / BC569-16PAS / BC69-25PAS
	45	1	63 - 100	160 - 250	115 ¹⁾ - 145 ¹⁾	BCP51 / -10 / -16	BCX51 / -10 / -16	BC51PA / BC51-10PA / BC51-16PA	BC51PAS / BC51-10PAS / BC51-16PAS
	60	1	63 - 100	160 - 250	100	BCP52 / -10 / -16	BCX52 / -10 / -16	BC52PA / BC52-10PA / BC52-16PA	BC52PAS / BC52-10PAS / BC52-16PAS
	80	1	63 - 100	160 - 250	115 ¹⁾ - 145 ¹⁾	BCP53 / -10 / -16	BCX53 / -10 / -16	BC53PA / BC53-10PA / BC53-16PA	BC53PAS / BC53-10PAS / BC53-16PAS

¹⁾ Typical value

In the spotlight

Medium-power transistors in DFN2020-3 and DFN2020D-3 (with solderable sidepads)

- Excellent electrical performance on a small 2 x 2 mm footprint
- 80% board space reduction (DFN2020 vs. SOT89)
- 100% solderable sidepads (DFN2020D-3)
- V_{CEO} ranging from 20 V to 80 V
- High collector-current capability I_C up to 2 A
- AEC-Q101 qualified

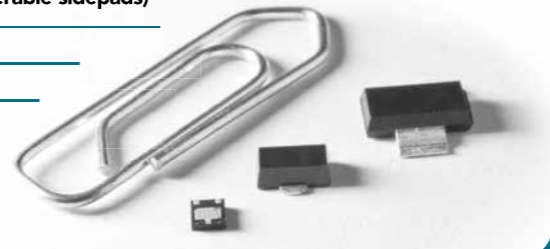

High-voltage transistors



Package						SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	SOT23	SOT323 (SC-70)
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P _{tot} (mW)						1700	1300	750	250	200
Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)					
NPN	80	100	20	-	60					BSS64
	140	300	60	250	100					PMBT5550
	160	300	80	250	100					PMBT5551 / BSR19A
	250	100	50	-	60	BF722	BF622			BF822
	300	100	50	-	60	BF720	BF620			BF820
	350	100	40	-	70	PZTA42	PXTA42			PMBTA42
PNP	400	300	50	200	20	BSP19	BST39			PMBTA44
	100	100	30	-	50					BSS63
	250	100	50	-	60					BF723
	300	100	50	-	60					BF623
2 x NPN	300	100	40	-	50			PZTA92	PXTA92	PMBTA92

For high-voltage transistors with increased performance please refer to our high-voltage low V_{CEsat} (BISS) transistor portfolio on page 18.

LED driver

Package		SOT457	SOT23
Size (mm)		2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0
P _{tot} (mW)		750	480
V _S supply voltage [V]		LED drive current [mA] @ V _S =10V	
18		10	NCR401T
		20	NCR402T
40		10	NCR401U
		20	NCR402U
		50	NCR405U

Voltage reference for SOT457

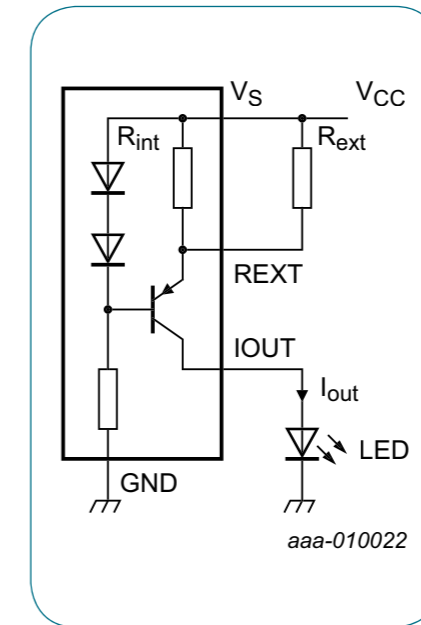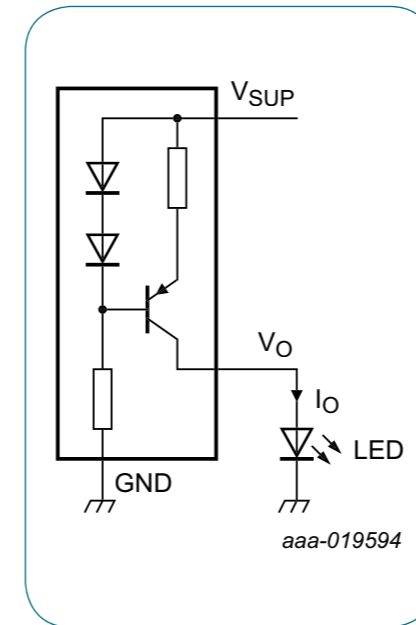

Key features and benefits

- ▶ Single-chip constant-current source with reduced component count
- ▶ Very small footprint for smaller designs

Key applications

- ▶ Constant-current LED driver
- ▶ Generic constant-current source
- ▶ Active bias control for audio amplifiers

Constant-current source

Package		SOT353 (SC-88A)				
Size (mm)		2.0 x 1.25 x 0.95				
P _{tot} (mW)		335				
Type		PSS12021SAY				
Description	maximum supply voltage	maximum supply current	typical stabilized output current	minimum stabilized output current	maximum stabilized output current	
Parameter	V _S max (V)	I _S max (mA)	I _{out} typ (µA)	I _{out} min (mA)	I _{out} max (mA)	
Value	75	2.2	15	0.015	50	

Darlington transistors

Package					SOT223 (SC-73)	SOT89 (SC-62)	SOT23
Size (mm)					6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0
P _{tot} (mW)					1700	1300	250
Polarity	V _{CE0} (V)	I _C (mA)	h _{FE} min	f _T min (MHz)			
NPN	30	500	10000	125			PMBTA13
			20000		PZTA14	PXTA14	PMBTA14
	45	1000	2000	200			BCV27
			2000		BSP50	BST50	
	60	500	10000	220			BCV47
			2000		BSP51	BST51	
80	1000	2000	200			BSP52	BST52
PNP	30	500	20000	125			PMBTA64
			220			BCV28	BCV26
	45	1000	2000	200			
			10000		BSP60	BST60	BCV48
	60	500	10000	220			
			2000		BSP61	BST61	
80	1000	2000	200			BSP62	BST62

Schmitt triggers

Package							SOT143B
Size (mm)							2.9 x 1.3 x 1.0
P _{tot} (mW)							250
Polarity	V _{CE0} (V) TR1	V _{CE0} (V) TR2	I _C (mA)	h _{FE} min	h _{FE} max	V _{CEsat} typ (mV)	
NPN	30	6	100	110	800	250	BCV63 / B
PNP	30	6	100	220	475	250	BCV64B

Low-noise transistors

Package							SOT23	SOT323 (SC-70)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P _{tot} (mW)							250	200
Polarity	V _{CE0} (V)	I _C (mA)	Noise figure max (dB)	h _{FE} min	h _{FE} max	f _T min (MHz)		
NPN	30	100	4	200	450	100	BC849B	BC849BW
				420	800	100	BC849C	BC849CW
	45	100	4	200	450	100	BC850B	BC850BW
				420	800	100	BC850C	BC850CW
PNP	30	100	4	220	475	100	BC859B	BC859BW
				420	800	100	BC859C	BC859CW
	45	100	4	220	475	100	BC860B	BC860BW
				420	800	100	BC860C	BC860CW

Matched-pair transistors

types in **bold** represent new products


Package								SOT143B	SOT457 (SC-74)	SOT353 (SC-88A)	SOT363 (SC-88)	SOT666	LFPK56D (SOT1205)
Size (mm)								2.9 x 1.3 x 1.0	2.9 x 1.5 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	5 x 6 x 1.1
P _{tot} (mW)								250	750	300	300	300	1250
Polarity	V _{CE0} (V)	I _C (mA)	h _{FE} min	h _{FE} max	h _{FE1} /h _{FE2}	V _{BE1} - V _{BE2} (mV)							
NPN	30	100	110	800	0.7 ¹⁾	n.a.	BCV61/A/B/C ¹⁾						
						n.a.	BCM61B ¹⁾						
	45	100	200	450	0.9 ¹⁾	2		BCM847DS		BCM847BS		BCM847BV	
						0.95	2		PMP4501G	PMP4501Y	PMP4501V		
	65	100	200	450	0.9	2			PMP4201G	PMP4201Y	PMP4201V		
						0.98	2			BCM846BS			
100	3000	150	400	0.95	n.a.							PHPT610035NK	
Configuration													
PNP	30	100	100	800	0.7 ¹⁾	n.a.	BCV62/A/B/C ¹⁾						
						n.a.	BCM62B ¹⁾						
	45	100	200	450	0.9 ¹⁾	2		BCM857DS		BCM857BS		BCM857BV	
						0.95	2		PMP5501G	PMP5501Y	PMP5501V		
	65	100	200	450	0.9	2			PMP5201G	PMP5201Y	PMP5201V		
						0.98	2			BCM856DS	BCM856BS		
100	3000	150	220	0.9	n.a.							PHPT610035PK	
Configuration													

¹⁾ I_{C1} / I_{E2}

In the spotlight

New transistors in LFPK56D (SOT1205) power package

- High thermal power dissipation up to 3 W
- V_{ce0} up to 100 V
- All types AECQ-101 qualified
- 2 types with current gain matching of 5% and 10%
- Reduced PCB size requirements
- High-temperature applications up to 175 °C
- For LED lighting, motor drive, linear regulators, backlight units, PowerMOS, and IGBT drive



Key features

- ▶ Current gain matching to 2, 5, or 10%
- ▶ Base-emitter voltage matching to 2 mV
- ▶ Choice of standard double transistor pinout or application-optimized pinout
- ▶ Common-emitter configuration for 5-pin type
- ▶ Range of small, very small, and ultra-small packages


Key benefits

- ▶ Improved performance of current mirror and differential amplifier circuits
- ▶ Drop-in replacement for standard double transistors (BCM series)
- ▶ Simplified board layout (PMP series)
- ▶ Eliminates the need for costly additional trimming


Key applications

- ▶ Current mirrors
- ▶ Differential and instrumentation amplifiers
- ▶ Logarithmic amplifiers
- ▶ Comparators




Differential amplifier

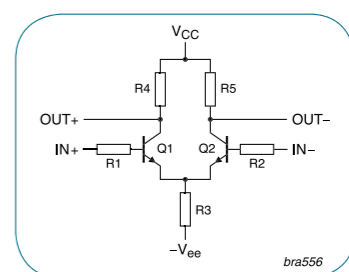

Current mirror



MOSFET driver

V_{CE0} (V)	I_c (A)	I_{cm} [A]	Type	Package	Remark	Configuration
30	0.1	0.2	BCV65	SOT143B 	General-purpose transistors	
40	0.6	1	PMD2001D	SOT457 	Switching transistors with reduced storage time	
	1	2	PMD3001D		Low V_{CEsat}	


Key features and benefits

- ▶ Three different configurations
- ▶ Types available with standard, switching, and low V_{CEsat} (BISS) transistors
- ▶ Small footprint


Key applications

- ▶ Power management
 - (Half) bridge push-pull driver
 - Isolated DC/DC converters
 - Secondary synchronous rectification
- ▶ Peripheral driver
 - (Half) bridge push-pull driver
 - Motor driver
 - Brushless DC motor driver
 - Op-amp output current booster

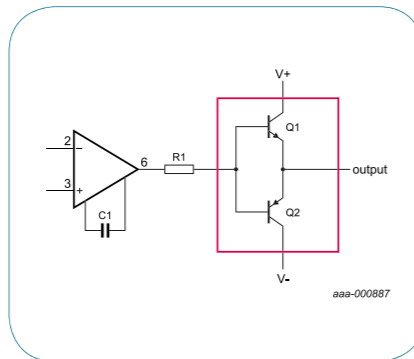

Op-amp booster

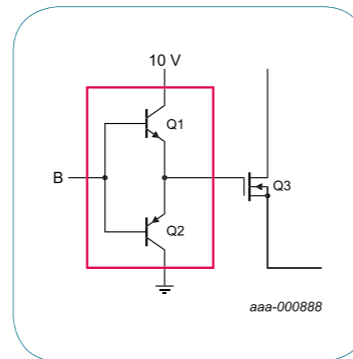

MOSFET driver for faster switching, lower losses



Medium-frequency transistors

						SOT23	SOT323 (SC-70)
Package							
Size (mm)						2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P_{tot} (mW)						250	200
Polarity	V_{CE0} (V)	I_c (mA)	h_{FE} min	h_{FE} max	f_T typ (MHz)		
NPN	15	100	40	-	500	BF570	
	20	25		85	>275	BF520	BFS20W
		30	65	225	260	BF519	
		40	25	67	220	380	BF840
PNP	30	25	25	50	250	BF824	BF824W
	40		50	-	>325	BF550	



Diodes

Schottky barrier diodes and rectifiers

33

- Medium-power low VF Schottky rectifiers single ≥ 1 A - Flatpower packages 33
- Medium-power low VF Schottky rectifiers single ≥ 200 mA - DSN packages 34
- Medium-power low VF Schottky rectifiers single ≥ 200 mA - leadless (DFN) packages 35
- Medium-power low VF Schottky rectifiers single ≥ 200 mA - leaded packages 36
- Medium-power low VF Schottky rectifiers dual ≥ 200 mA 37
- General-purpose Schottky diodes ≤ 250 mA 38
- Low-capacitance Schottky diodes 39

Zener diodes

40

- General-purpose Zener diodes 40
- Zener diodes specifications 41

Switching diodes

42

- General-purpose, high-speed switching diodes < 90 V 42
- General-purpose, high-speed switching diodes 100 V 42
- General-purpose, switching diodes ≥ 100 V 43
- PN-rectifier 43
- Controlled-avalanche switching diodes 44
- Low-leakage current-switching diodes 44

What you get when you choose NXP for diodes and rectifiers

A comprehensive portfolio for all kind of applications

NXP is continually innovating parts by reducing power consumption and size while boosting performance and reliability

A broad range of packages


Including standard leaded SMD, medium-power clip-bond and ultra-small leadless packages with dimensions down to 0.6 x 0.3 x 0.3 mm

A quality product from an experienced, high volume supplier


- ▶ NXP is strongly committed to automotive quality standards
- ▶ NXP has a track record of more than 60 years in developing and producing diodes
- ▶ NXP is the #1 in small-signal discretes with a high production capacity

Portfolio Overview Diodes


Schottky Diodes

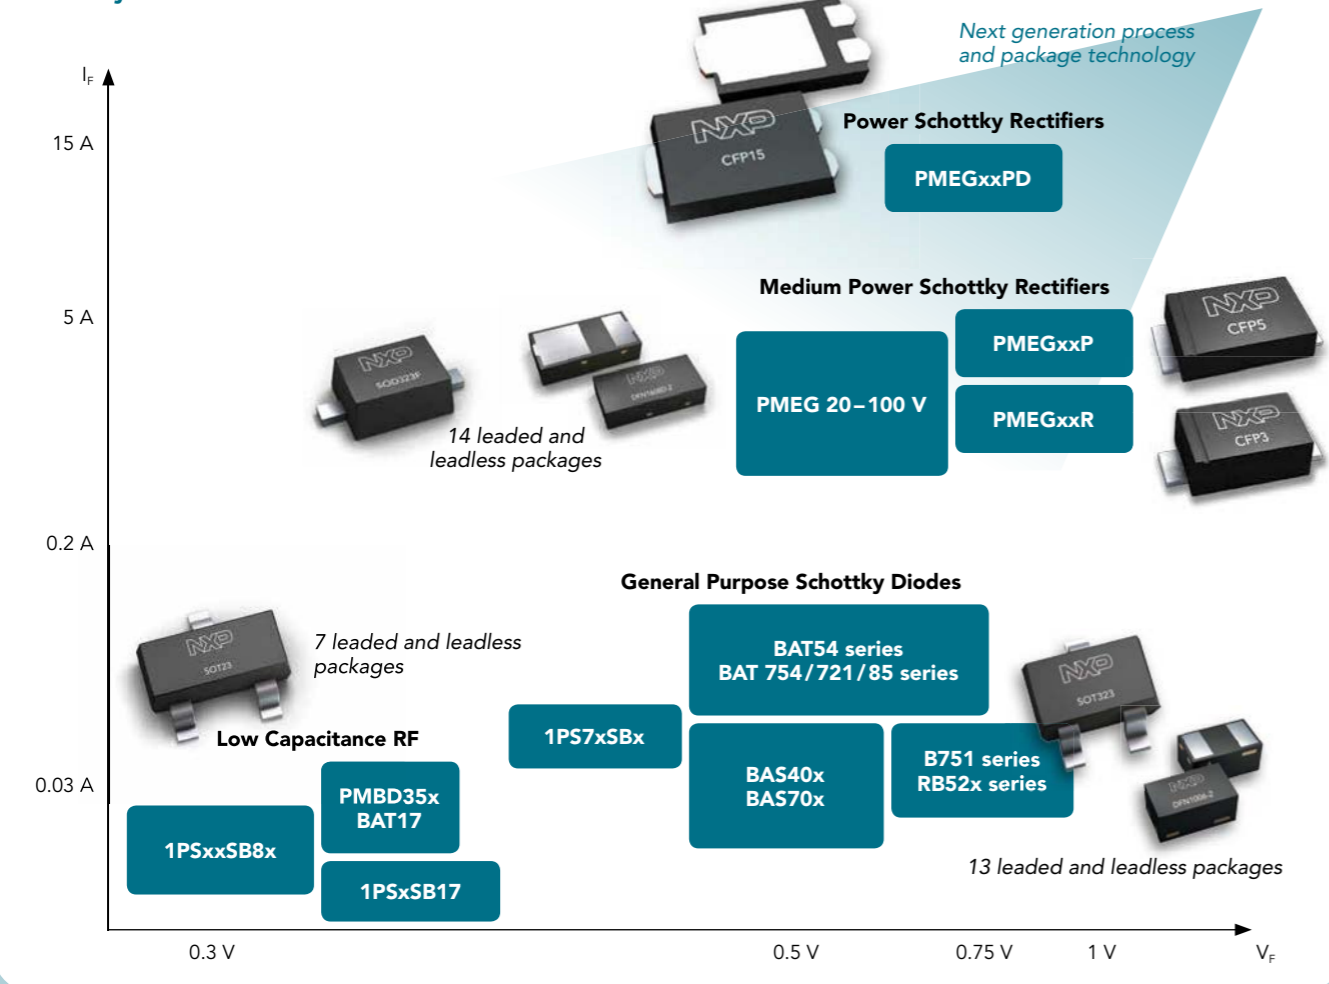

Switching Diodes

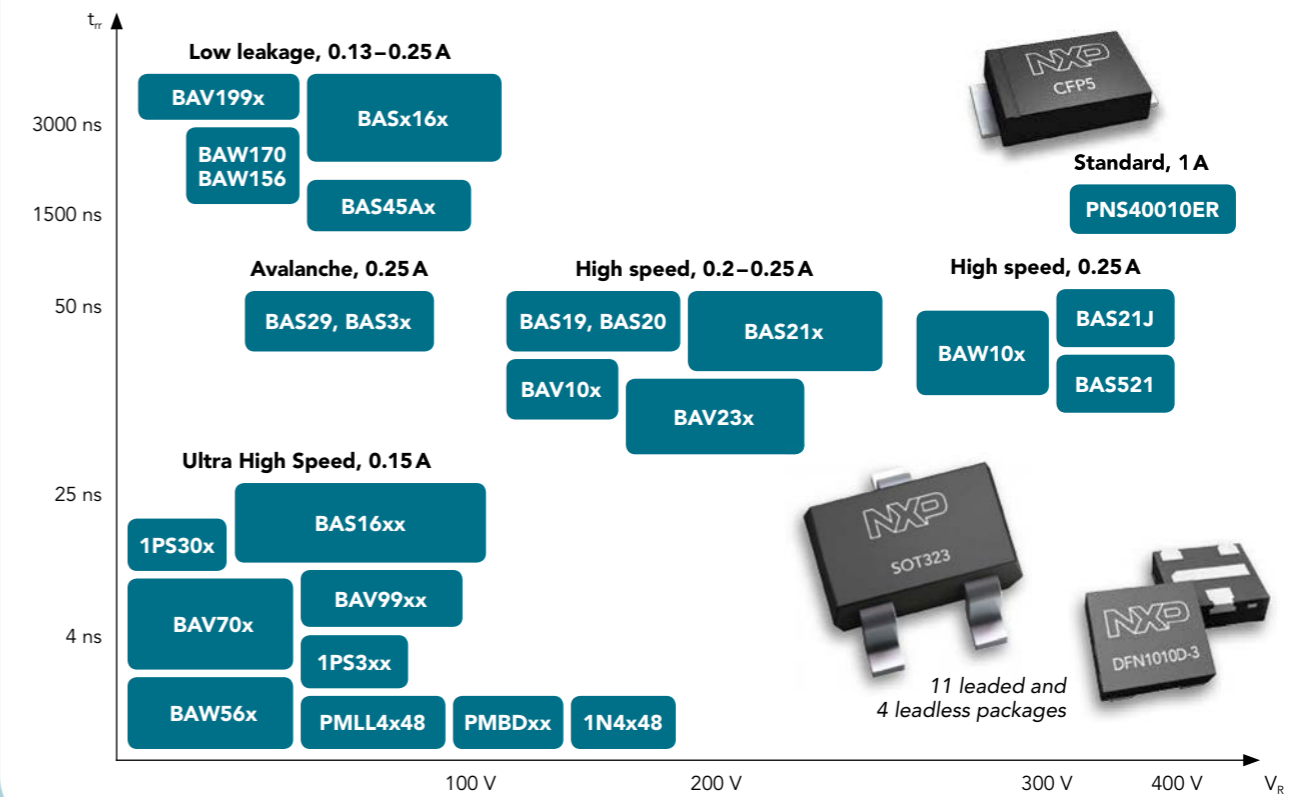

Zener Diodes

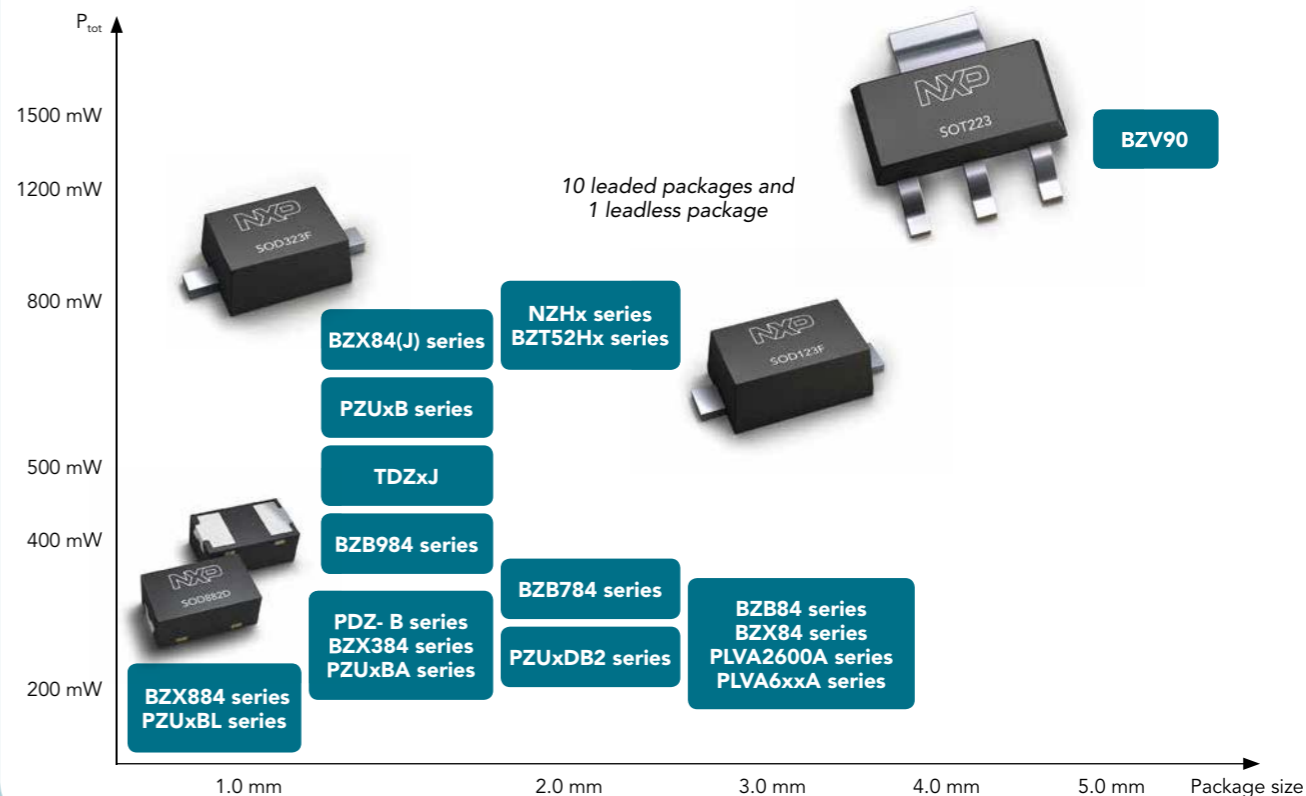

NXP's FlatPower packages

CFP3, CFP5, and CFP15


The medium-power solution for shrinking designs

Small SMD FlatPower packages in three different versions




- ▶ Flat geometry, of down to 0.78 mm height
- ▶ Halogen-free mold compound
- ▶ AEC-Q101 qualified

Robust design

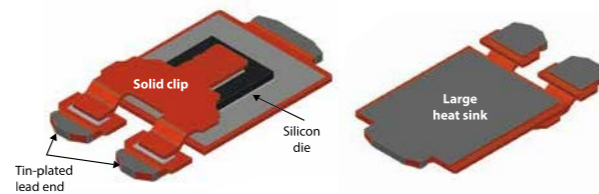

- ▶ High-power capability due to wire-free clip-bond technology and heatsink
- ▶ Automatic optical inspection of solder joint due to tin-plated lead ends
- ▶ Benchmark flat design of only 0.7 mm height

Low I_R Schottky Portfolio, AEC-Q101

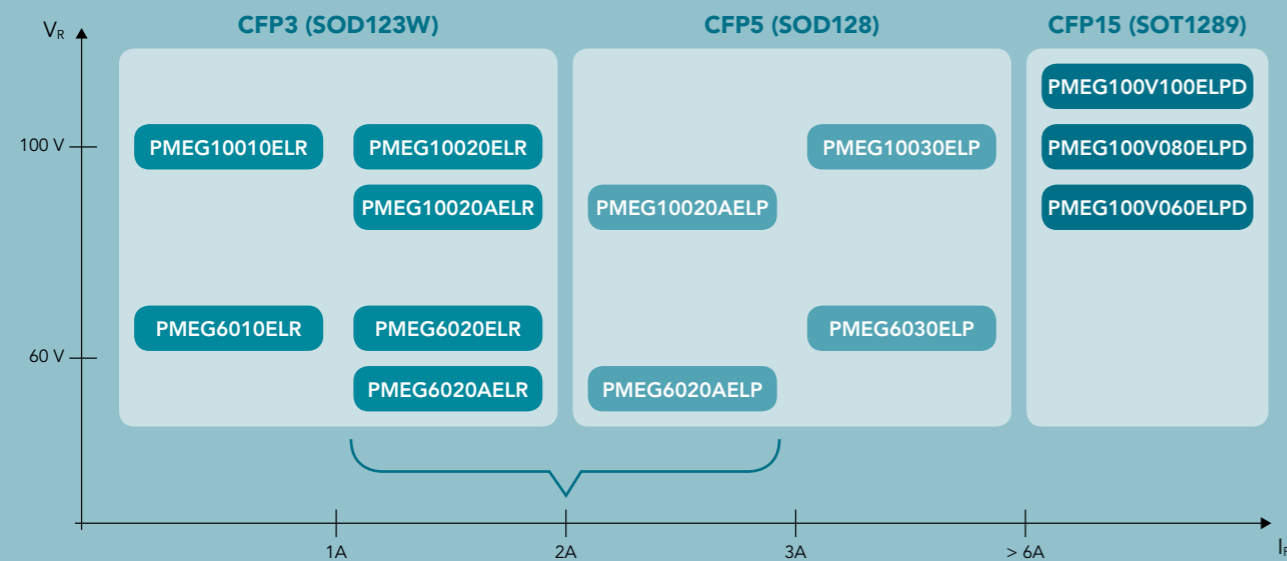

NXP offers more than 200 products in FlatPower packages, to support a wide range of applications for medium-power rectification and surge protection.

Schottky barrier diodes and rectifiers

Medium-power low V_F Schottky rectifiers single ≥ 1 A - FlatPower packages

types in **bold** represent new products

I_F max (A)	V_R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Package	CFP15 (SOT1289)	CFP5 (SOD128)	CFP3 (SOD123W)
				Size (mm)	5.8 x 4.3 x 0.78	3.8 x 2.5 x 1.0	2.6 x 1.7 x 1.0
				P_{tot} (mW) @ 1 cm ²	2150	1050	950
				Optimization			
1	20	340	1	Low V_F			PMEG2010ER
		450	0.05	Low I_R			PMEG2010BER
	30	360	1.5	Low V_F		PMEG3010EP	PMEG3010ER
		450		Low I_R		PMEG3010BEP	PMEG3010BER
	40	490	0.05	Low V_F		PMEG4010EP	PMEG4010ER
				Low V_F		PMEG4010ETP	PMEG4010ETR
	60	530	0.06	Low V_F		PMEG6010EP	PMEG6010ER
		530		Low V_F			PMEG6010ETR
	100	660	0.0003	Low I_R			PMEG6010ELR
		770		0.00015	Low I_R		
2	30	360	3	Low V_F		PMEG3020EP	
		420	1.5	Low V_F		PMEG3020CEP	PMEG3020ER
		450	0.1	Low I_R		PMEG3020BEP	
		520	0.05	Low I_R		PMEG3020DEP	PMEG3020BER
	40	490	0.1	Low V_F		PMEG4020EP	PMEG4020ER
				Low V_F		PMEG4020ETP	PMEG4020ETR
	60	530	0.2	Low V_F		PMEG6020EP	PMEG6020ER
		530		Low V_F		PMEG6020ETP	PMEG6020ETR
		680	0.0007	Low I_R		PMEG6020AELP	PMEG6020AELR
		760		Low I_R			PMEG6020ELR
100	770	0.0003	Low I_R			PMEG10020AELR	
	830		0.00015	Low I_R		PMEG10020AELP	PMEG10020ELR
3	30	360	5	Low V_F		PMEG3030EP	
		450	0.15	Low I_R		PMEG3030BEP	
	40	490	0.2	Low V_F		PMEG4030EP	
				Low V_F		PMEG4030ETP	
	60	540	0.1	Low I_R			PMEG4030ER
		530		0.2	Low V_F		PMEG6030EP
		475	0.4	Low V_F		PMEG6030EVP	
		530	0.2	Low V_F		PMEG6030ETP	
	100	690	0.001	Low I_R		PMEG6030ELP	
		770		0.00045	Low I_R		PMEG10030ELP
4.5	60	530	0.4	Low V_F		PMEG6045ETP	
		360	8	Low V_F		PMEG3050EP	
5	30	450	0.25	Low I_R		PMEG3050BEP	
				Low V_F		PMEG4050EP	
	490	0.3	Low V_F		PMEG4050ETP		
45	45			Low V_F	PMEG045V050EPD		
				Low V_F	PMEG060V050EPD		
6	100	850	0.001	Low I_R	PMEG100V060ELPD		
		850	0.001	Low I_R	PMEG100V080ELPD		
8	100	850	0.001	Low I_R	PMEG100V080ELPD		
				Low V_F	PMEG045V100EPD		
	45	490	0.6	Low V_F	PMEG45U10EPD		
		540	0.5	Low I_R	PMEG45A10EPD		
60	560	0.7	Low V_F	PMEG060V100EPD			
	850	0.001	Low I_R	PMEG100V100ELPD			
10	45	550	0.1	Low I_R	PMEG045T150EPD		
		580		Low I_R	PMEG45T15EPD		
	490	1	Low V_F	PMEG045V150EPD			
	550	0.1	Low I_R	PMEG050T150EPD			
50	500	1	Low V_F	PMEG050V150EPD			


Medium-power low V_F Schottky rectifiers single ≥ 200 mA - Leadless DSN packages types in bold represent new products

I_F max (A)	V_F max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_F max	Package	DSN0603-2 (SOD962)	DSN1006-2 (SOD993)	DSN1006U-2 (SOD995)
				Size (mm)	0.6 x 0.3 x 0.3	1.0 x 0.6 x 0.28	1.0 x 0.6 x 0.28
				P_{tot} (mW) @ 1 cm ²	525	1.000	1.190
Optimization							
0.2	20	420	0.045	Low V_F	PMEG2002AESF		
		490	0.0035	Low I_R	PMEG2002ESF		
	30	470	0.08	Low V_F	PMEG3002AESF		
		535	0.009	Low I_R	PMEG3002ESF		
40	525	0.08	Low V_F	PMEG4002AESF			
	600	0.0065	Low I_R	PMEG4002ESF			
0.5	20	550	0.045	Low V_F	PMEG2005AESF		
		620	0.0035	Low I_R	PMEG2005ESF		
	30	630	0.08	Low V_F	PMEG3005AESF		
		720	0.009	Low I_R	PMEG3005ESF		
40	820	0.08	Low V_F	PMEG4005AESF			
	880	0.0065	Low I_R	PMEG4005ESF			
1	30	480	1.25	Low V_F		PMEG3010AESB	PMEG3010AESB
		565	0.045	Low I_R		PMEG3010ESF	
	40	505	0.115	Low V_F		PMEG4010AESB	PMEG4010AESB
		610	0.04	Low I_R		PMEG4010ESB	
	60	625	0.65	Low V_F		PMEG6010AESB	PMEG6010AESB
		730	0.03	Low I_R		PMEG6010ESB	

Forward characteristic survey of Schottkys in DSN1006-2


$V_R: 30V, I_F: I_A$ (typical data)

Selected DSN Schottky rectifier

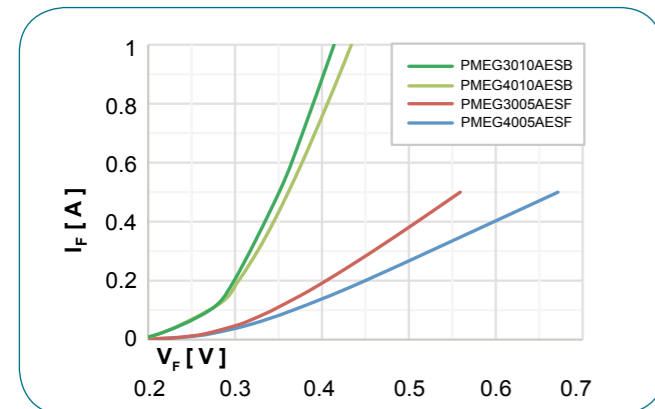

This diagram shows the broad variety of the DSN portfolio

PMEG3010AESB versus competitor type

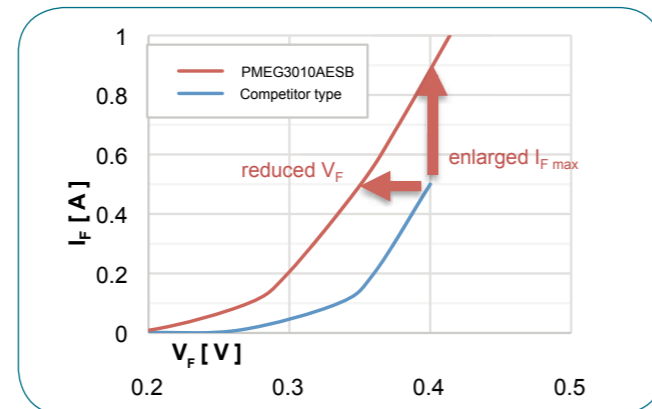

NXP type has higher forward current specified and has benchmark low V_F

In the spotlight

PMEG3010AESB, PMEG6010ESB, low V_F Schottky Rectifier

30 / 40 / 60 V, 1A Schottky rectifier in DSN1006-2 (SOD993) package

Low forward voltage, V_F max = 480 mV @ 1 A (PMEG3010AESB)

Low leakage current, I_R max = 30 μ A @ 60 V (PMEG6010ESB)

High surge capability up to $I_{FSM} = 10$ A

Ideal for LED backlighting in mobile applications



Medium-power low V_F Schottky rectifiers single ≥ 200 mA - Leadless DFN packages types in bold represent new products

I_F max (A)	V_F max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_F max	Package	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)	DFN1608D-2 (SOD1608)	DFN1006-2 (SOD882)	DFN1006D-2 (SOD882D)
				Size (mm)	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62	1.6 x 0.8 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
				P_{tot} (mW) @ 1 cm ²	960	960	780	565	660
Optimization									
0.2	30	480	0.05	low V_F				PMEG3002AEL	PMEG3002AELD
	40	600	0.01	low I_R				PMEG4002EL	PMEG4002ELD
	60	600	0.1	low V_F					PMEG6002ELD
0.5	20	390	0.2	low V_F					PMEG2005BELD
		410	0.3	low V_F			PMEG2005EPK		
		440	1.5	low V_F				PMEG2005AEL	PMEG2005AELD
	30	500	0.03	low I_R				PMEG2005EL	PMEG2005ELD
		590	0.01	low I_R			PMEG4005EPK		PMEG3005ELD
1	20	375	1.9	low V_F	PMEG2010EPA	PMEG2010EPAS			
		415	0.6	low V_F			PMEG2010EPK		
	40	490	0.2	low V_F					PMEG2010BELD
		600	0.02	low I_R			PMEG4010EPK		
1.5	20	420	0.9	low V_F			PMEG2015EPK		
	40	610	0.03	low I_R			PMEG4015EPK		
2	20	420	1.9	low V_F	PMEG2020EPA	PMEG2020EPAS			
		450	0.9	low V_F			PMEG2020EPK		
	30	470	2.5	low V_F	PMEG3020EPA	PMEG3020EPAS			
		535	0.1	low V_F	PMEG4020EPA	PMEG4020EPAS			
	60	530	0.2	low V_F			PMEG4020EPK		
		575	0.25	low V_F	PMEG6020EPA	PMEG6020EPAS			

Features and benefits

- ▶ 33% lower V_F on same footprint
- ▶ Low profile of 0.37 mm
- ▶ Solderable side pads
- ▶ Visual solder inspection

Applications

- ▶ Handheld equipment
- ▶ Smartphone backlight units
- ▶ Battery chargers
- ▶ Shrunk PCB designs

Differentiated portfolio


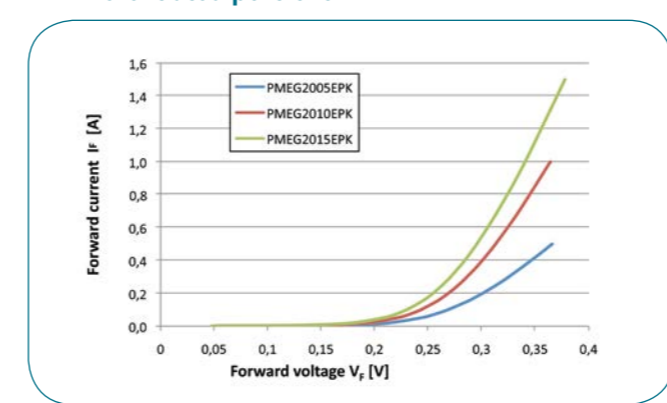


Diagram shows the variety of characteristics in DFN1608D-2 (SOD1608)

with best performance

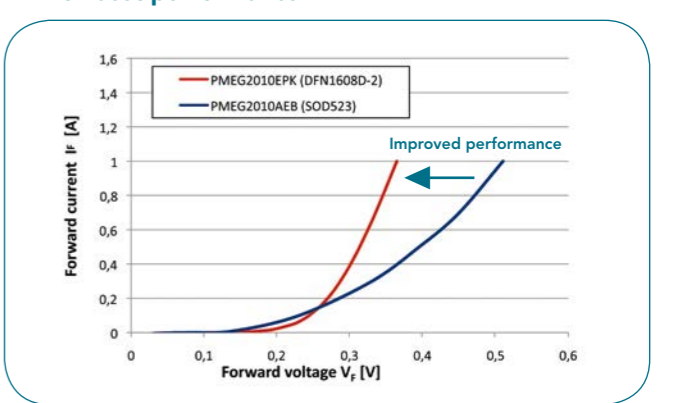

PMEG2010EPK shows significant V_F improvement compared to the SOD523 device

Medium-power low V_F Schottky rectifiers single ≥ 200 mA - Leaded packages

I_F max (A)	V_F max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Package	SOT457 (SC-74)	SOT23	SOD123F	SOT323 (SC-70)	SOD323F (SC-90)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	
					Size (mm)	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6
					540	420	830	400	830	570	570	500	
				Optimization									
0.2	30	480	0.05	low V_F					PMEG3002EJ			PMEG3002AEB	
	40	600	0.01	low I_R					PMEG4002EJ			PMEG4002EB	
	60	600	0.1	low V_F					PMEG6002EJ			PMEG6002EB	
0.5	20	390	0.2	low V_F		PMEG2005ET	PMEG2005EH		PMEG2005EJ	PMEG2005AEA	PMEG2005AEV		
		480	0.03	low I_R								PMEG2005EB	
	30	430	0.15	low V_F		PMEG3005ET	PMEG3005EH		PMEG3005EJ	PMEG3005AEA	PMEG3005AEV		
		500	0.5	low V_F								PMEG3005EB	
		470	0.1	low V_F		PMEG4005ET	PMEG4005EH		PMEG4005EJ	PMEG4005AEA	PMEG4005AEV		
40	550	1.1	low V_F		BAT720		1PS70SB20						
1	20	430	0.2	low V_F		PMEG2010AET	PMEG2010AEH						
		500	0.2	low V_F		PMEG2010ET	PMEG2010EH		PMEG2010EJ	PMEG2010BEA	PMEG2010BEV		
		550	0.07	low I_R					PMEG2010AEJ	PMEG2010EA BAT760	PMEG2010EV BAT960		
		620	1.5	low V_F								PMEG2010AEB	
	30	450	1	low V_F	1PS74SB23								
		520	0.1	low I_R			PMEG3010CEH		PMEG3010CEJ				
		560	0.15	low V_F			PMEG3010ET	PMEG3010EH		PMEG3010EJ	PMEG3010BEA	PMEG3010BEV	
		680	0.5	low V_F								PMEG3010EB	
		570	0.05	low I_R					PMEG4010CEH		PMEG4010CEJ		
		600	0.02	low I_R									
40	640	0.05	low V_F			PMEG4010ET	PMEG4010EH		PMEG4010EJ	PMEG4010BEA	PMEG4010BEV		
	60	650	0.35	low V_F	PMEG6010AED								
		660	0.05	low I_R				PMEG6010CEH		PMEG6010CEJ			
1.5	20	660	0.2	low I_R			PMEG2015EH		PMEG2015EJ	PMEG2015EA	PMEG2015EV		
	30	500	1	low V_F			PMEG3015EH		PMEG3015EJ		PMEG3015EV		
2	10	460	3	low V_F			PMEG1020EH		PMEG1020EJ	PMEG1020EA	PMEG1020EV		
	20	525	0.2	low V_F			PMEG2020EH		PMEG2020EJ	PMEG2020AEA			
		30	620	1	low V_F			PMEG3020EH		PMEG3020EJ			
3	10	530	3	low V_F			PMEG1030EH		PMEG1030EJ				

Medium-power low V_F Schottky rectifiers dual ≥ 200 mA

types in **bold** represent new products

I_F max (A)	V_F max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Optimization	Package	SOT223 (SC-73)	SOT23	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)	SOT666
						Size (mm)	6.5 x 3.5 x 1.65	2.9 x 1.3 x 1.0	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.63
						1500	250	1000	1000	300
					P_{tot} (mW) @ 1 cm ²					
0.2	30	480	0.03	low V_F						PMEG3002TV
	60	600	0.1	low V_F						PMEG6002TV
0.5	20	390	0.2	low V_F						PMEG2005CT
		30	430	0.15	low V_F					PMEG3005CT
	40	470	0.1	low V_F						PMEG4005CT
1.0	25	450	1.0	low V_F		BAT120S				
				low V_F		BAT120C				
				low V_F		BAT120A				
	40	500	0.05	low V_F				PMEG4010CPA	PMEG4010CPAS	
				low V_F				PMEG6010CPA	PMEG6010CPAS	
				low V_F		BAT160S				
60	650	0.35	low V_F		BAT160C					
			low V_F		BAT160A					
			low V_F							
2.0	20	420	1.0	low V_F				PMEG2020CPA	PMEG2020CPAS	
	30	440	2.0	low V_F				PMEG3020CPA	PMEG3020CPAS	

Diodes

In the spotlight

Schottky Rectifier in SOD123F and SOD323F

Broad portfolio base of 36 types, 20 / 60 V, 0.2 - 3 A

Optimized either for low V_F or low I_R

High surge capability up to 10 A


High thermal capability due to flat-lead design

AEC-Q101 qualified

Ideal for DC/DC conversion, free-wheeling, reverse polarity protection




Low V_F (MEGA) Schottky rectifier nomenclature

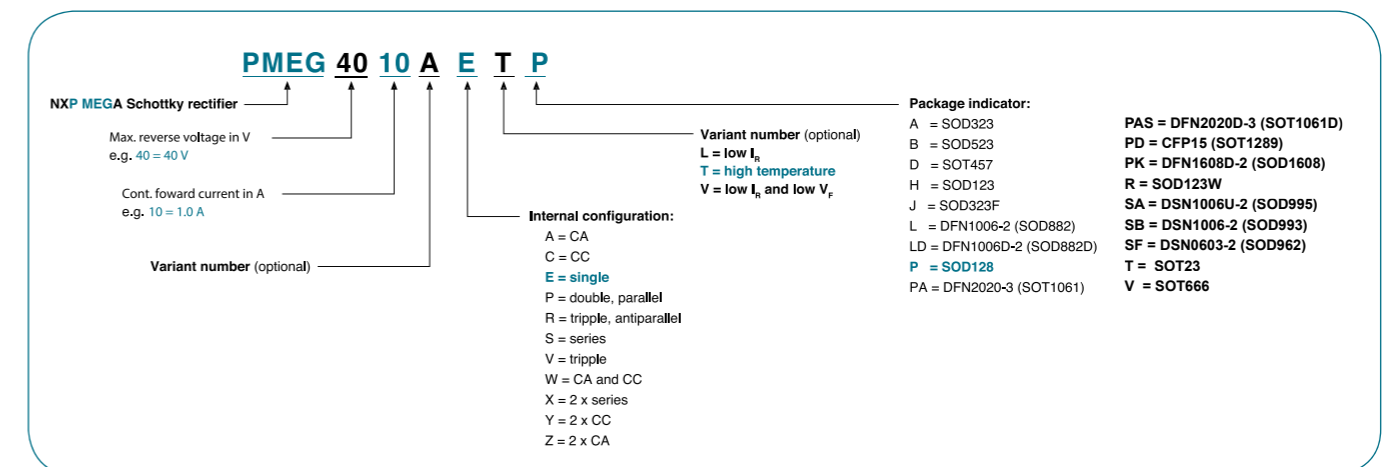

General-purpose Schottky diodes ≤ 250 mA

I _F max (mA)	V _R max (V)	V _F max (mV)	@ I _F (mA)	I _F max (μA)	@ V _R (V)	Package	SOD80C (MiniMelf)	SOD68 (DO-34)	SOT23	SOT143B	SOD123F	SOT323 (SC-70)	SOT363 (SC-88)	SOD323F (SC-90)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	DFN1006-2 (SOD882)/DFN1006-3 (SOT883)					
						Size (mm)	3.5 x 1.5 x 1.5	3.04 x 1.6 x 0.55	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48					
						P _{tot} (mW)	300	500	250	250	830	250	300	550	400	300	500	250					
70	70	750	10	0.1	50	single			BAS70		BAS70H	BAS70W			1PS76SB70		1PS79SB70	BAS70L					
						dual series			BAS70-04			BAS70-04W											
						dual c.c.			BAS70-05			BAS70-05W											
						dual c.a.			BAS70-06			BAS70-06W											
						dual isolated							BAS70-07				BAS70-07S				BAS70-07V		
						triple isolated															BAS70VV		
120	40	500	10	1	30	single			BAS40		BAS40H	BAS40W			1PS76SB40		RB751S40	RB751CS40					
						dual series			BAS40-04			BAS40-04W											
						dual c.c.			BAS40-05			BAS40-05W											
						dual c.a.			BAS40-06			BAS40-06W											
						dual isolated							BAS40-07								BAS40-07V		
						quad c.c./c.c.												1PS88SB48			BAS40-05V		
200	30	300	10	30	10	single												1PS79SB31					
						single			BAT754														
						dual series			BAT754S														
						dual c.c.			BAT754C														
						dual c.a.			BAT754A														
						triple isolated												BAT754L					
	40	400	10	2	25	single	BAS85	BAT85	BAT54		BAT54H	BAT54W		BAT54J	1PS76SB10			1PS79SB10	BAT54L				
						dual series			BAT54S			BAT54SW											
						dual c.c.			BAT54C			BAT54CW											BAT54CM
						dual c.a.			BAT54A			BAT54AW											
						dual isolated						BAT74					BAT74S				BAT74V		
						triple isolated															BAT54VV		
	40	420	30	0.5	25	quad c.c./c.c.																	
						quad 2x series																	
						single																	
						single																	
						dual series						BAT721											
						dual c.c.						BAT721S											
50	450	10	5	40	single																		
					single																		
					dual series																		
					dual c.c.																		
					dual c.a.																		
					single																		
250	100	850	250	4	75	single	BAS86	BAT86															
						single																	
						single																	
						single																	
						single																	
						single																	

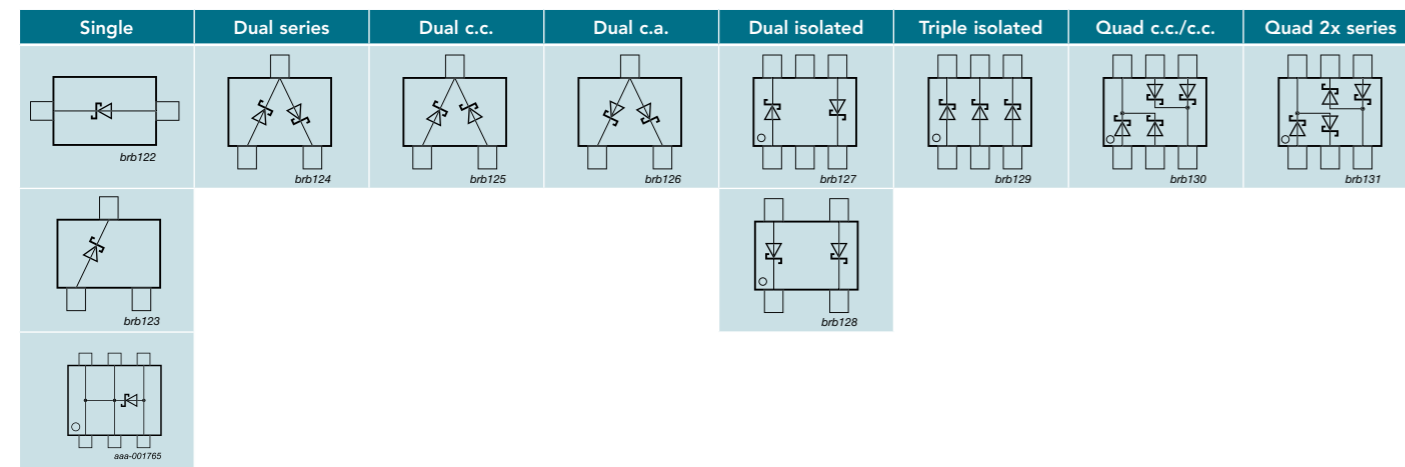

Low-capacitance Schottky diodes

I _F max (mA)	V _R max (V)	V _F max (mV)	@ I _F (mA)	C _d max (pF)	@ V _R = 0 V	Package	SOT23	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	DFN1006-2 (SOD882)	
						Size (mm)	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48	
						P _{tot} (mW)	250	250	300	400	300	500	250	
30	4	450	1	1	single	BAT17				1PS76SB17		1PS79SB17		
					triple isolated						1PS66SB17			
					dual series	PMBD353 PMBD354 ¹⁾								
					single		1PS70SB82						1PS10SB82	
					triple isolated			1PS88SB82		1PS66SB82				
					dual series		1PS70SB84							
15	340	1	1	dual c.c.		1PS70SB85								
				dual c.a.		1PS70SB86								

¹⁾ Diodes have matched capacitance

General-purpose high-speed switching diodes < 90V

types in **bold** represent new products

V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA)	@ V _R (V)	t _{tr} max (ns)	Package	SOD80C (MiniMelf)	SOT23	SOT143B	SOT323 (SC-70)	SOT363 (SC-88)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	
							Size (mm)	3.5 x 1.5 x 1.5	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48
							P _{tot} (mW)	500	250	250	200	300	540	250
50	1	50	100	50	4			BAL74						
								BAV74						
70	1	50	1000	70	4			BAL99						
										BAS28				
75	1	50	1000	75	4									
		100	5000	75	4		BAS32L							
80	1	50	500	80	4					1PS300				
										1PS301				
										1PS302				
90	1	50	500	80	4			BAW56		BAW56W		BAW56QA	BAW56M	
											BAW56S			
											BAW756S			

General-purpose, high-speed switching diodes 100V

types in **bold** represent new products

V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA)	@ V _R (V)	t _{tr} max (ns)	Package	SOT23	SOD123F	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOD323F (SC-90)	SOT666	SOD523 (SC-79)	DFN1010D-3 (SOT1215)	DFN1006-2 (SOD882)	DFN1006-3 (SOT883)	DFN1006D-2 (SOD882D)	
							Size (mm)	2.9 x 1.3 x 1.0	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
							P _{tot} (mW)	250	830	200	300	400	550	180	500	540	250	250	250
100	1	50	500	80	4			BAS16H			BAS316	BAS16J		BAS516		BAS16L		BAS16LD	
							BAS16		BAS16W				BAS16QA						
									BAS16VY			BAS16VV							
							BAV70		BAV70W					BAV70QA		BAV70M			
									BAS16VY			BAS16VV							
									BAS16VY			BAS16VV							
							BAV99		BAV99W					BAV99QA					
			BAS16VY			BAS16VV													

General-purpose switching diodes ≥ 100V

types in **bold** represent new products

V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA)	@ V _R (V)	t _{tr} max (ns)	Package	SOD80C (MiniMelf)	SOT457 (SC-74)	SOT23	SOT143B	SOD123F	SOT323 (SC-70)	SOT353 (SC-88A)	SOT363 (SC-88)	SOD323 (SC-76)	SOD323F (SC-90)	SOD523 (SC-79)					
							Size (mm)	3.5 x 1.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.2 x 0.8 x 0.6				
							P _{tot} (mW)	300	500	250	250	830	350		300	400	550	500				
100	1	100	100	100	50				BAS19													
150	1	100	100	150	50		BAV102															
									BAS20													
≥200	1	100	100	200	50		BAV103				BAS21H				BAS321							
									BAS21		BAS21W											
										BAS21												
										BAV23												
														BAS21PG								
										BAV23A			BAS21AW									
										BAV23C												
										BAV23S			BAS21SW									
												BAS21AVD										
						BAS21VD																
300	1.1	100	150	250	50												BAS21J	BAS521				

PN-rectifier

V _R max (V)	V _F max (V)	@ I _F (A)	I _R max (μA)	@ V _R (V)	t _{tr} max (ns)	Package	CFP3 SOD123W	
							Size (mm)	2.6 x 1.7 x 1.0
							P _{tot} (mW)	950
400	1.1	1	1	400	1800		PNS40010ER	

In the spotlight

Dual high-speed switching diode BAS21PG in SOT353 (SC-88A)

V_R max = 250 V, I_F max = 225 mA, dual isolated configuration








Low leakage current: I_R max = 100 nA

High-speed switching: t_{tr} max = 50 ns

Low capacitance: C_d max = 2 pF

AEC-Q101 qualified

Controlled-avalanche switching diodes

















V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA) @ V_R max	I_{FSM} max (A)	I_{FRM} max (mA)	C_d max (pF)	t_{rr} max (ns)	Package	SOT23	SOT143B
										
									Size (mm)	Size (mm)
60	1	200	100	9	600	2.5	6			
90	1	200	100	10	600	35	50		BAS29	
									BAS31	
									BAS35	



ESD protection, TVS, filtering and signal conditioning

Low-leakage current-switching diodes

types in **bold** represent new products

V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA) @ V_R max	t_{rr} max (μs)	Package	SOD80C (MiniMelf)	SOD68 (DO-34)	SOT23	SOD123F	SOT323 (SC-70)	SOD323 (SC-76)	SOD523 (SC-79)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006-2 (SOD882)
															
						Size (mm)	Size (mm)	Size (mm)	Size (mm)	Size (mm)	Size (mm)	Size (mm)	Size (mm)	Size (mm)	Size (mm)
75	1	10	5	3					BAS116H		BAS416	BAS716			BAS116L
								BAS116					BAS116QA		
								BAV199		BAV199W					
								BAW156							
								BAV170					BAV170QA	BAV170M	
125	1	100	1	1.5 typ		BAS45AL	BAS45A								

Ultra low-capacitance ESD protection devices 49

Low-capacitance ESD protection devices 53

Standard ESD protection devices 57

Application-specific ESD and ESD/EMI solutions 59

- USB 2.0 protection and filtering 59
- Common Mode Filter for USB 2.0 59
- USB 3.x and eSATA protection and filtering 60
- Common Mode Filter for USB 3.x 61
- Common Mode Filter for video interfaces 62
- Ethernet protection 62
- HDMI and memory-card signal conditioning 63
- Video interface protection 64
- NFC antenna protection 65
- LCD/camera protection and filtering 66
- Audio interface protection and filtering 67
- Memory- and SIM-card protection and filtering 67
- Automotive high-speed network protection 68
- Automotive in-vehicle network bus line protection 68

Transient voltage suppressor (TVS) diodes 70

- TVS diodes for mobile applications 70
- TVS diodes, 24 / 40 W 70
- TVS diodes, 400 W 71
- TVS diodes, 600 W 72

ESD protection, TVS devices, and EMI filtering

What you get when you choose NXP

Solutions for wide application fields

- ▶ High-speed data lines
- ▶ General interfaces
- ▶ Automotive protection
- ▶ Supply lines

A broad range of packages that simplify PCB design

A quality product from an experienced, high volume supplier

- ▶ NXP is strongly committed to automotive quality standards
- ▶ NXP has a track record of more than 12 years in developing and producing ESD / TVS devices
- ▶ NXP is the #1 in ESD protection with a high production capacity


USB3 / Type C
 USB2 / Type C
 USB Vbus / charger port / Type C
 NFC antenna
 Wireless charging
 Audio speaker
 Battery contact, Vbat
 Keys / buttons
 SIM, SD3
 Audio



CAN, LIN
 FlexRay
 BroadR-Reach
 SENT
 LVDS



Portfolio Overview Diodes

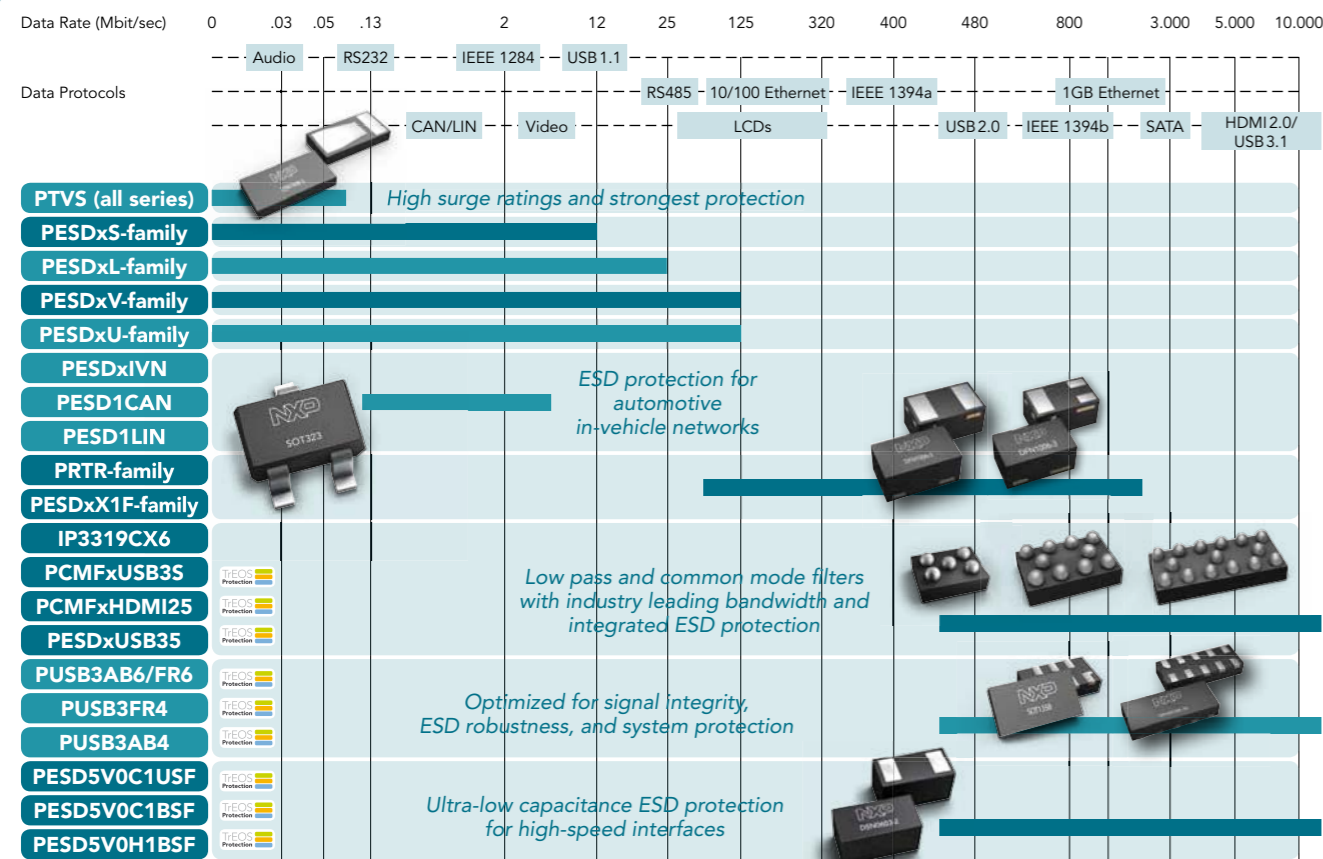


The best system-chip protection for high-speed data lines (USB 3.1, Type-C connector)

ESD protection characteristics that count

There are three key parameters for a perfect ESD protection device:

- ▶ High robustness against ESD pulses
- ▶ Low clamping / dynamic resistance – to protect the system chip
- ▶ Low capacitance – to maintain excellent signal integrity in high-speed interfaces

Some applications require good performance in only one or two of these areas. For the latest interfaces with the highest data rates, optimum performance in all three parameters is key. Until recently, improving one of these key parameters had a negative impact on the others. Addressing this challenge, NXP has developed a new ESD technology (TrEOS Protection) that delivers benchmark performance in all three key parameters.

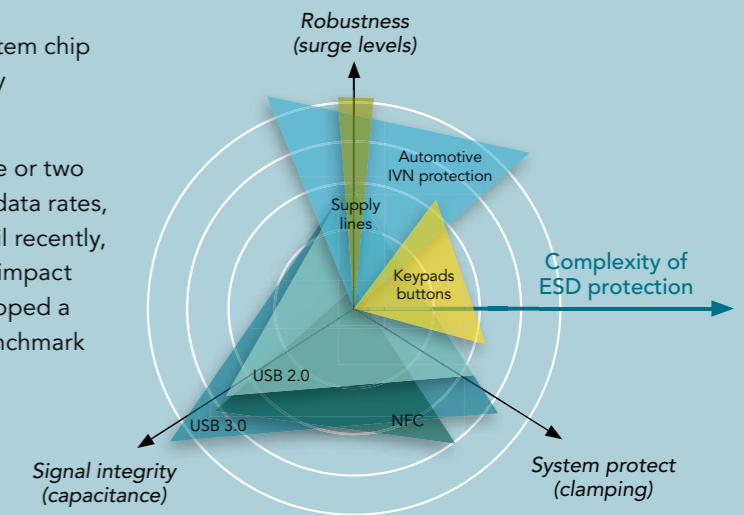

Extremely low clamping voltage
 Absorbing highest ESD pulses THE key for reliable system protection



▶ Low capacitance down to 0.1 pF
 ▶ High robustness up to 9A, 8/20 μs
 ▶ Packages optimized for communications interfaces

TrEOS Protection devices

Type	device	VRWM (V)	Uni- or bidirectional	Cd typ (pF)	ESD rating max (kV) (Ω)	Rdyn TLP (Ω)	Number of protected lines	Package	Size (mm)
PUSB3FR4	ESD protection	3.3	uni	0.29	15	0.27	4	DFN2510A-10	2.5 x 1.0 x 0.48
PUSB3FR6	ESD protection	3.3	uni	0.35	15	0.29	6	DFN2111-7	2.1 x 1.1 x 0.48
PUSB3AB4	ESD protection	3.3	bi	0.17	15	0.4	4	DFN2510A-10	2.5 x 1.0 x 0.48
PUSB3AB6	ESD protection	3.3	bi	0.15	15	0.4	6	DFN2111-7	2.1 x 1.1 x 0.48
PCMF1USB3S	Common Mode Filter with ESD protection	5	uni	0.3	15	0.14	2	WLCSP5	0.8 x 1.2 x 0.5
PCMF2USB3S	Common Mode Filter with ESD protection	5	uni	0.3	15	0.14	4	WLCSP10	1.6 x 1.2 x 0.5
PCMF3USB3S	Common Mode Filter with ESD protection	5	uni	0.3	15	0.14	6	WLCSP15	2.4 x 1.2 x 0.5
PESD3V3C1BSF	ESD protection	3.3	bi	0.2	20	0.23	1	DSN0603-2	0.6 x 0.3 x 0.3
PESD5V0R1BSF	ESD protection	5	bi	0.1	10	0.45	1	DSN0603-2	0.6 x 0.3 x 0.3
PESD5V0H1BSF	ESD protection	5	bi	0.15	15	0.25	1	DSN0603-2	0.6 x 0.3 x 0.3
PESD5V0C1BSF	ESD protection	5	bi	0.2	20	0.23	1	DSN0603-2	0.6 x 0.3 x 0.3
PESD5V0C1USF	ESD protection	5	uni	0.45	20	0.1	1	DSN0603-2	0.6 x 0.3 x 0.3

ESD protection, TVS, filtering and signal conditioning

Tiny but mighty – DSN0402

Reliable ESD protection on minimal space

DSN0402-2 (SOD992) features and benefits


- ▶ Ultra-small dimensions: 0.4 x 0.2 mm (01005 inch)
- ▶ 45% less package area compared to DSN0603-2
- ▶ Only 120 μm in height
- ▶ Coated sidewalls enable easier soldering
- ▶ Polarity marking
- ▶ Halogen and antimony free; RoHS compliant



DSN0402-2 (SOD992)

Single package
0.4 x 0.2 x 0.12 mm

DSN0402-2 package outline and reflow soldering footprint

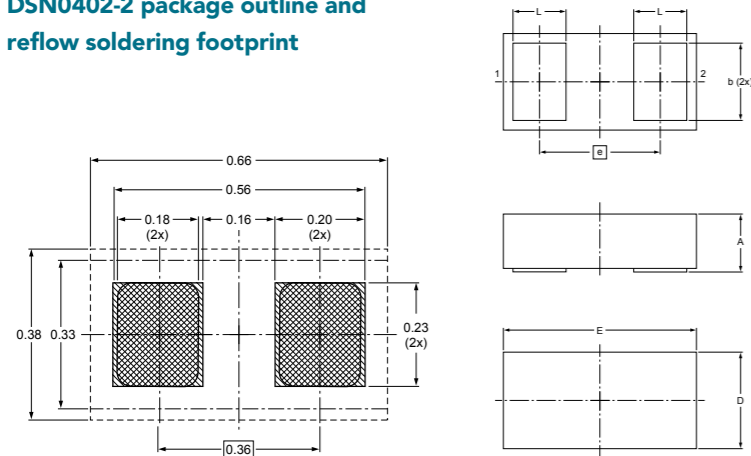

Dimensions (mm are the original dimensions)

Unit	A	E	D	L	b	e
max	0.14	0.42	0.22	0.12	0.17	
nom	0.12	0.40	0.20	0.11	0.16	0.25
min	0.10	0.38	0.18	0.10	0.15	

Ultra-low capacitance in DSN0402

Type	V _{rwM} (V)	Config	C _d typ (pF)	C _d max (pF)	V _{esd} (kV)
PESD5V0F1BSH	5 V	Bi	0.25 pF	0.3 pF	8 kV

Ultra low-capacitance ESD protection devices

Ultra low-capacitance ESD protection devices – Part I

types in **bold** represent new products


Unidirectional	Number of protected lines		V _{rwM} (V)	C _d typ (pF)	C _d max (pF)	ESD rating ^[1] max (kV)	Configuration	Type	Package	Size (mm)	
	Bidirectional										
			5	0.45	0.5	20		PESD5V0C1USF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3	
			5	0.6	0.75	10		PESD5V0F1USF			
			5	0.95	1.15	8		PESD5V0X1ULD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37	
				1.55	1.75	15		PESD5V0X1UALD			
			16	0.83	0.98	8		PESD16VX1UL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48	
				0.95	1.15	8		PESD5V0X1UB	SOD523 (SC-79)		
			5	1.55	1.75	15		PESD5V0X1UAB		1.2 x 0.8 x 0.6	
				0.95	1.15	8					
			80	0.6	0.75	30			NUP1301U	SOT323	2.0 x 1.25 x 0.95
									NUP1301	SOT23	2.9 x 1.3 x 1.0
0	1		5	0.3	0.4	8		PESD5V0F1BSH	DSN0402-2 (SOD992)	0.4 x 0.2 x 0.12	
			3.3	0.2	0.25	20		PESD3V3C1BSF		0.6 x 0.3 x 0.3	
			5	0.1	0.15	10		PESD5V0R1BSF	DSN0603-2 (SOD962)		
				0.15	0.2	15		PESD5V0H1BSF			
			5.5	0.25	0.3	10		PESD5V0C1BSF			
								PESD5V0F1BSF			
			3.3	–	1.1	20		PESD5V0F1BRSF			
			5.0	–	1.1			PESD3V3X1BCSF			
			18	0.28	0.45	10		PESD5V0X1BCSF			
								PESD18VF1BSF			
			24	0.25	0.4	10		PESD24VF1BSF			
			5	0.4	0.55	10		PESD5V0F1BLD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37	
								PESD5V0F1BRLD			
			3.3	1.3	1.6	9		PESD3V3X1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48	
								5.5			0.4
			5	0.49	0.6	8					
				0.85	0.95	15		9			PESD5V0X1BCAL
			0.9								1.3
			18	0.35	0.5	10		PESD18VF1BL			
	24	0.3					0.45	10			PESD24VF1BL

^[1] according to IEC 61000-4-2 (contact discharge)

In the spotlight

Ultra low-capacitance ESD protection in DSN0603-2: PESD5V0H1BSF

- Bidirectional protection for one data line in DSN0603-2
- Ultra-low line capacitance of 0.15 pF
- Ultra-low clamping
- Minimized capacitance variation over voltage
- High ESD robustness = 15 kV
- Ultra-small package DSN0603-2 (0.6 x 0.3 x 0.3 mm)



Ultra low-capacitance ESD protection devices – Part 2

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	ESD rating ⁽¹⁾ max (kV)	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional								
2	1	5	0.5	0.65	10		PESD5V0X2UMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37
							PESD5V0X2UM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48
							PESD5V0X2UAMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37
							PESD5V0X2UAM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48
	0	5.5	1	1.5	8		PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0
							PRTR5V0U2AX	SOT23	2.9 x 1.3 x 1.0
	0	5.5	1	1.5	8		PESD5V0X1BQ	SOT663	1.6 x 1.2 x 0.55
							PESD5V0X1BT	SOT23	2.9 x 1.3 x 1.0
							PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0
							PRTR5V0U2AX	SOT23	2.9 x 1.3 x 1.0
0	5.5	1	1.5	8		PRTR5V0U2F	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48	

⁽¹⁾ according to IEC 61000-4-5 (contact discharge)

In the spotlight

Lowest capacitance ESD protection in DFN1006B-3: PESD5V0X2UAMB

Unidirectional double protection for two signal lines


Ultra-low line capacitance of 0.8 pF

Very low package height of 0.37 mm typ

High ESD robustness of 15 kV

AEC-Q101 qualified

Ideal for high-speed data lines, portable electronics, and communication systems



Ultra low-capacitance ESD protection devices – Part 3

types in **bold** represent new products


Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	ESD rating ⁽¹⁾ max (kV)	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional								
4	0	5.5	1	-	8		IP4220CZ6	SOT457 (SC-74)	2.9 x 1.5 x 1.0
							IP4221CZ6-S	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
							IP4221CZ6-XS	DFN1010-6 (SOT891)	1.0 x 1.0 x 0.48
							PRTR5V0U4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0
	0	5.5	0.8	-	12		IP4285CZ9-TBB	DFN2110-9 (SOT1178)	2.1 x 1.0 x 0.48
							PUSB2X4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0
							PUSB2X4Y	SOT363 (SC-88)	2.0 x 1.25 x 0.95
	0	5.5	0.6	-	8		IP4283CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48

⁽¹⁾ according to IEC 61000-4-5 (contact discharge)

In the spotlight

PUSB3AB4 - ESD protection in very small DFN2510A-10 package for USB3.1 @ 10 Gbps and Thunderbolt

- Protects four very fast data lines of sensitive system chips
- Lowest clamping in the 0.2 pF class
- Very small DFN2510A-10 package (2.5 x 1.0 x 0.48 mm)
- Capacitance < 0.2 pF



Ultra low-capacitance ESD protection devices – Part 4

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	ESD rating ^[1] max (kV)	I _R max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional									
4	0	5.5	0.5	-	10	-		IP4294CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48
		3.3	0.27	-	15	0.1		PUSB3FR4		
0	3	3.3	0.17	0.2	15	0.1		PUSB3AB4		
5	4	5	0.55	0.7	8	0.1		PESD5V0F5UF	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
								PESD5V0F5UV	SOT666	1.6 x 1.2 x 0.55
0	6	5.5	0.27	0.35	10	0.1		PUSB3TB6	DFN2111-7 (SOT1358)	2.1 x 1.1 x 0.48
6	0	3.3	0.25	-	15			PUSB3FR6		
0	6	3.3	0.15	0.2	15			PUSB3AB6		

^[1] according to IEC 61000-4-2 (contact discharge)

Low-capacitance ESD protection devices – Part I

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	P _{PP} ^[1] max (W)	ESD rating ^[2] max (kV)	I _R max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)			
Unidirectional	Bidirectional													
1	0	3.3	34	40	45	30	0.3		PESD3V3L1UL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48			
		5	25	30	42	26	0.1		PESD5V0L1UL					
		5	25	30	42	26	0.1		PESD5V0L1ULD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37			
		3.3	34	40	45	30	0.3		PESD3V3L1UB	SOD523 (SC-79)	1.2 x 0.8 x 0.6			
		5	25	30	42	26	0.1		PESD5V0L1UB					
		5	25	30	42	26	0.1		PESD5V0L1UA	SOD323 (SC-76)	1.7 x 1.25 x 0.95			
		5	12	15	10	30	0.1		PESD5V0L1USF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3			
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48			
		5	2	2.6	-	9	0.1		PESD5V0U1UL					
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UB	SOD523 (SC-79)	1.2 x 0.8 x 0.6			
		5	2	2.6	-	9	0.1		PESD5V0U1UB					
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UA	SOD323 (SC-76)	1.7 x 1.25 x 0.95			
		5	2	2.6	-	9	0.1		PESD5V0U1UA					
		0	1	5.5	12	15.4	35		30	0.1		PESD5V0L1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
				3.3	101	-	500		30	2		PESD3V3L1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
5	75			-	500	30	1	PESD5V0L1BA						
12	19			-	200	30	0.05	PESD12VL1BA						
15	16			-	200	30	0.05	PESD15VL1BA						
24	11			-	200	23	0.05	PESD24VL1BA						

^[1] 8 / 20 μs exponential decay waveform according to IEC 61000-4-5 and IEC 61643-321

^[2] according to IEC 61000-4-2 (contact discharge)

ESD protection, TVS, filtering and signal conditioning

Low-capacitance ESD protection devices – Part 2

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{line} typ (pF)	C _{line} max (pF)	P _{PP} ^[1] max (W)	ESD rating ^[2] max (kV)	I _R max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
0	1	5	11	13	45	30	0.01		PESD5V0V1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
		5	11	13	45	30	0.01		PESD5V0V1BLD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37
		5	11	13	45	30	0.01		PESD5V0V1BB	SOD523 (SC-79)	1.2 x 0.8 x 0.6
		5	11	13	45	30	0.01		PESD5V0V1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
		5	5.3	6	10	20	0.1		PESD5V0V1BCSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
		5	5.3	6	20	25	0.1		PESD5V0V1BDSF		
		5.5	3.5	4.5	8	15	0.1		PESD5V0V1BSF		
		12	17	25	290	30	0.01		PESD12VV1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
		15	8	10	-	15	0.1		IP4302CX2/A	WLCSP2	0.7 x 0.52 x 0.40
		5	2.9	3.5	-	10	0.1		PESD5V0U1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
									PESD5V0U1BLD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37
									PESD5V0U1BB	SOD523 (SC-79)	1.2 x 0.8 x 0.6
									PESD5V0U1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
PESD5V0U1B	DFN1006-3 (SOT883)							1.0 x 0.6 x 0.48			
2	1	3.3	22	28	30	15	0.3	PESD3V3L2UM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48	
								PESD5V0L2UM	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37	
								PESD5V0L2UMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37	
								PESD5V0L2UU	SOT323 (SC-70)	2.0 x 1.25 x 0.95	
								PESD6V0L2UU	SOT323 (SC-70)	2.0 x 1.25 x 0.95	

^[1] 8 / 20 μs exponential decay waveform according to IEC 61000-4-5 and IEC 61643-321

^[2] according to IEC 61000-4-5 (contact discharge)

In the spotlight

PESD12VV1BL: Lowest capacitance ESD protection in DFN1006-2

Bidirectional protection for one data line


Very low line capacitance of 17 pF

High ESD robustness of 30 kV

AEC-Q101 qualified

Ultra-small package DFN1006-2 (SOD882) with a height of only 0.48 mm typ

Ideal for portable electronics, communication systems, or audio and video equipment



Low-capacitance ESD protection devices – Part 3

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{line} typ (pF)	C _{line} max (pF)	P _{PP} ^[1] max (W)	ESD rating ^[2] max (kV)	I _R max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
0	2	3.3	101	-	350	30	2		PESD3V3L2BT	SOT23	2.9 x 1.3 x 1.0
		5	75			30	1		PESD5V0L2BT		
		12	19			30	0.05		PESD12VL2BT		
		15	16	30	0.05	PESD15VL2BT					
		24	11	23	0.05	PESD24VL2BT					
		35	45	130	0.1	PESD5V0S2BT					
		-	-	-	-	PESD5V0U2BT					
		5	2.9	3.5	-	10	0.1		PESD5V0U2BM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48
									PESD5V0U2BMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37
									PESD5V0V2BM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.37
									PESD5V0V2BMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37
									PESD5V0U1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
		4	3	3.3	22	28	30		20	0.3	
5	16			19	30	20	0.025	PESD5V0L4UF			
3.3	22			28	30	20	0.3	PESD3V3L4UW	SOT665	1.6 x 1.2 x 0.55	
5	16			19	30	20	0.025	PESD5V0L4UW	SOT665	1.6 x 1.2 x 0.55	
3.3	22			28	30	20	0.3	PESD3V3L4UG	SOT353 (SC-88A)	2.0 x 1.25 x 0.95	
5	16			19	30	20	0.025	PESD5V0L4UG	SOT353 (SC-88A)	2.0 x 1.25 x 0.95	
4	3	3.3	13	17	25	10	1		PESD3V3V4UK	DFN1010-6 (SOT891)	1.0 x 1.0 x 0.48
		5	12	15	25	15	0.3		PESD5V0V4UK		
		9	6.5	10	28	8	0.1		PESD9V0V4UK		
		3.3	15	18	16	12	0.3		PESD3V3V4UW	SOT665	1.6 x 1.2 x 0.55
		5	12	15	16	12	0.025		PESD5V0V4UW		

^[1] 8 / 20 μs exponential decay waveform according to IEC 61000-4-5 and IEC 61643-321

^[2] according to IEC 61000-4-5 (contact discharge)

ESD protection, TVS, filtering and signal conditioning

Low-capacitance ESD protection devices – Part 4

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	P _{PP} ^[1] max (W)	ESD rating ^[2] max (kV)	I _R max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
0	4	5	2.9	3.5	-	10	0.1		PESD5V0U4BF	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
		5	2.9	3.5	-	10	0.1		PESD5V0U4BW	SOT665	1.6 x 1.2 x 0.55
5	4	3.3	20	24	28	15	2		PESD3V3LSUK	DFN1010-6 (SOT891)	1.0 x 1.0 x 0.48
		5	18.5	22	30	20	0.5		PESD5V0LSUK		
		3.3	22	28	25	20	0.3		PESD3V3LSUF	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
		5	16	19	25	20	0.025		PESD5V0LSUF		
		3.3	22	28	25	20	0.3		PESD3V3LSUV	SOT666	1.6 x 1.2 x 0.55
		5	16	19	25	20	0.025		PESD5V0LSUV		
		3.3	22	28	25	20	0.3		PESD3V3LSUY	SOT363 (SC-88)	2.0 x 1.25 x 0.95
		5	16	19	25	20	0.025		PESD5V0LSUY		
0	5	5	2.9	3.5	-	10	0.1		PESD5V0U5BF	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
		5	2.9	3.5	-	10	0.1		PESD5V0U5BV	SOT666	1.6 x 1.2 x 0.55

^[1] 8 / 20 μs exponential decay waveform according to IEC 61000-4-5 and IEC 61643-321

^[2] according to IEC 61000-4-5 (contact discharge)

Standard ESD protection devices – Part 1

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	P _{PP} ^[1] max (W)	ESD rating ^[2] max (kV)	I _R max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)		
Unidirectional	Bidirectional												
1	0	5	35	42	40	30	0.1		PESD5V0S1USF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3		
		3.3	207	300	150	30	2		PESD3V3S1UL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48		
		5	152	200	150	30	1		PESD5V0S1UL				
		12	38	75	150	30	0.05		PESD12VS1UL				
		15	32	70	150	30	0.05		PESD15VS1UL				
		24	23	50	150	23	0.05		PESD24VS1UL				
		36	18	30	150	30	0.01		PESD36VS1UL				
		5	152	200	150	30	1		PESD5V0S1ULD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37		
		12	38	75	150	30	0.05		PESD12VS1ULD				
		15	32	70	150	30	0.05		PESD15VS1ULD				
		24	23	50	150	23	0.05		PESD24VS1ULD				
		3.3	207	300	330	30	2		PESD3V3S1UB			SOD523 (SC-79)	1.2 x 0.8 x 0.6
		5	152	200	260	30	1		PESD5V0S1UB				
		12	38	75	180	30	0.05		PESD12VS1UB	SOD323 (SC-76)	1.7 x 1.25 x 0.95		
		15	32	70	160	30	0.05		PESD15VS1UB				
		24	23	50	160	23	0.05		PESD24VS1UB	SOD323 (SC-76)	1.7 x 1.25 x 0.95		
		5	480	530	890	30	4		PESD5V0S1UA				
		12	160	180	600	30	0.1		PESD12VS1UA	SOD323F (SC-90)	1.7 x 1.25 x 0.7		
		24	23	50	160	23	0.05		PESD24VS1UA				
		5	480	530	890	30	4		PESD5V0S1UJ	SOD523 (SC-79)	1.2 x 0.8 x 0.6		
		12	160	180	600	30	0.1		PESD12VS1UJ				
		2.5	229	300	260	30	6		PESD5Z2.5	SOD523 (SC-79)	1.2 x 0.8 x 0.6		
		3.3	172	200	260	30	0.05		PESD5Z3.3				
		5	89	150	180	30	0.05		PESD5Z5.0				
6	78	150	180	30	0.01	PESD5Z6.0							
7	69	150	180	30	0.01	PESD5Z7.0							
12	35	75	200	30	0.01	PESD5Z12							
0	1	5.5	35	45	100	30	0.1		PESD5V0S1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3		
		5	35	45	130	30	0.1		PESD5V0S1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48		
		5	35	45	130	30	0.1		PESD5V0S1BLD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37		
		5	35	45	130	30	0.1		PESD5V0S1BB	SOD523 (SC-79)	1.2 x 0.8 x 0.6		
		5	35	45	130	30	0.1		PESD5V0S1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95		

^[1] 8 / 20 μs exponential decay waveform according to IEC 61000-4-5 and IEC 61643-321

^[2] according to IEC 61000-4-2 (contact discharge)

Standard ESD protection devices – Part 2

types in **bold** represent new products

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	P _{PP} ^[1] max (W)	ESD rating ^[2] max (kV)	I _{pk} max (μA) @ V _{RWM}	Configuration	Type	Package	Size (mm)	
Unidirectional	Bidirectional											
2	1	3.3	200	275	150	23	3		PESD3V3S2UQ	SOT663	1.6 x 1.2 x 0.55	
		5	150	215	150	30	0.3		PESD5V0S2UQ			
		12	38	100	150	30	0.03		PESD12VS2UQ			
		15	32	70	150	30	0.05		PESD15VS2UQ			
		24	23	50	150	23	0.05		PESD24VS2UQ			
		3.3	207	300	330	30	2		PESD3V3S2UT			
		5.2	152	200	260	30	1	PESD5V2S2UT				
		12	38	75	180	30	1	PESD12VS2UT				
		15	32	70	160	30	1	PESD15VS2UT				
		24	23	50	160	23	1	PESD24VS2UT				
		36	17	35	160	30	1 (@ 30 V)	PESD36VS2UT				
		3.3	207	300	330	30	2	PESD3V3S2UAT		PESD3V3S2UAT	SOT23	2.9 x 1.3 x 1.0
		5	152	200	260	30	1	PESD5V0S2UAT				
		15	32	70	160	30	0.05	PESD15VS2UAT				
		24	23	50	160	23	0.05	PESD24VS2UAT				
		0	2	5	35	45	130	30	0.1		PESD5V0S2BQA	SOT1215
4	3	3.3	110	300	110	30	1 (@ 3 V)		PESD3V3S4UF	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48	
		5	85	220	110	30	0.1 (@ 4.3 V)		PESD5V0S4UF			
		3	107	125	-	8	1		BZA956A	SOT665	1.6 x 1.2 x 0.55	
		4	90	105	-	8	0.5		BZA962A			
		4.3	78	90	-	8	0.1		BZA968A			
		3	200	240	-	8	2		BZA856A	SOT353 (SC-88A)	2.0 x 1.25 x 0.95	
		3	200	240	-	8	2		BZA456A			
		4	165	200	-	15	0.7		BZA462A			
		15	37	48	-	8	0.1		BZA420A			
		3.3	215	300	200	30	0.8		PESD3V3S4UD	SOT457 (SC-74)	2.9 x 1.5 x 1.0	
		5	165	220	200	30	0.2		PESD5V0S4UD			
		24	40	70	200	23	0.015		PESD24VS4UD			
		3.3	215	300	200	30	0.8		PESD3V3S5UD			
5	165	220	200	30	0.2	PESD5V0S5UD						
12	73	100	200	30	0.015	PESD12VS5UD						
15	60	90	200	30	0.015	PESD15VS5UD						
24	45	70	200	23	0.015	PESD24VS5UD						
0	4	5	45	75	-	15	0.1		BZA408B			

^[1] 8 / 20 μs exponential decay waveform according to IEC 61000-4-5 and IEC 61643-321

^[2] according to IEC 61000-4-2 (contact discharge)

USB 2.0 protection and filtering

types in **bold** represent new products

Baseband interface	Number of protected lines	R _{line}	C _{line} (pF)	Remark	Type	Package	Size (mm)	
USB2.0 (Plastic package)	2		1.0	ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0	
			1.8	ESD protection for up to 2 ultra high-speed datalines with 12 kV ESD robustness	PRTR5V0U2AX			
	3 + 1				ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2F	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
					USB protection for USB OTG with 5.5 V Vbat protection	PUSBM5V5X4-TL	DFN1616-6 (SOT1189)	
					USB protection for USB OTG with 12 V Vbat protection	PUSBM12VX4-TL		
					USB protection for USB OTG with 30 V Vbat protection	PUSBM30VX4-TL		
	4			0.8	Very low clamp ESD protection for USB2.0 high-speed with 12 kV IEC ESD protection	PUSB2X4Y	SOT363 (SC-88)	2.0 x 1.25 x 0.95
					Very low clamp ESD protection for USB2.0 high-speed with 12 kV IEC ESD protection	PUSB2X4D	SOT457 (SC-74)	
					Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4220CZ6	DFN1410-6 (SOT886)	
					Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	PRTR5V0U4D		
					ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4221CZ6-S	DFN1010-6 (SOT891)	
					Dual ESD protection for USB2.0 high-speed, SD-card, SIM-card	IP4221CZ6-XS		

ESD protection, TVS, filtering and signal conditioning

Common Mode Filter for USB 2.0

types in **bold** represent new products

Baseband interface	Number of protected lines	C _{line} (pF)	ESD rating ^[1] max (kV)	Remark	Type	Package	Size (mm)
USB2.0	2	1.5	15	Common Mode filter with ESD protection for high-speed interfaces such as USB 2.0	IP3319CX6	WLCSP6	1.34 x 0.95 x 0.57

^[1] according to IEC 61000-4-2 (contact discharge)

In the spotlight

IP3319CX6 - Common Mode Filter for USB2.0


- Very wide differential pass band >1 GHz
- Very broadband Common Mode attenuation
- Very low clamping ESD protection, excellent SoC protection
- Very small WLCSP6 package (footprint area 1.34 x 0.95 mm)

NXP paves the way for USB Type-C connector

USB 3.x protection and filtering



USB Type-C evaluation board with NXP protection solutions

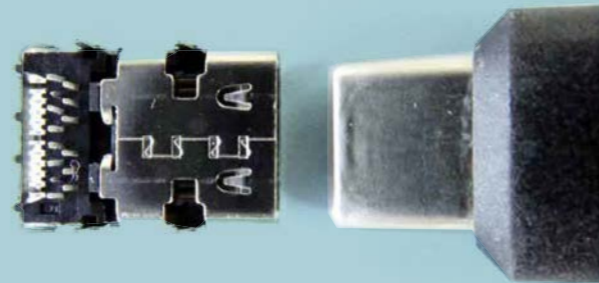

USB Type-C receptacle


USB Type-C plug

PUSB3FR4 and the new Type-C connector

The perfect match. PUSB3FR4 supports protection for the new Type-C connector, in order to enable direction-agnostic connection, faster charging and the smallest solution to support SuperSpeed USB.

USB 3.1 introduces data rates up to 10 Gbps

As shown in the eye diagram, NXP offers protection, which supports data rates up to 10 Gbps with low capacitance and optimized package layouts.

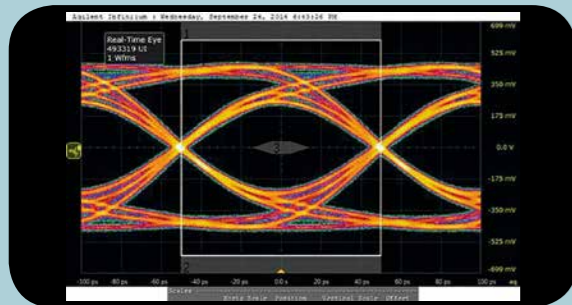

PUSB3FR4 on standard FR4 testboard

Common Mode Filter for USB 3.x




NXP's Common Mode Filter offer:

- ▶ Best in class system-level protection due to deep snap-back and very low dynamic resistance
- ▶ Very wide-band Common Mode rejection to cover all critical frequencies
- ▶ Improved RF performance and small footprint compared to separate ESD/CMF solutions
- ▶ Protection for MIPI CSI, DSI, USB3.x, and HDMI 2.0

Key Features of PCMFxUSB3S

- ▶ ESD protection is available in the same footprint, allowing last-minute changes between Common Mode Filter with ESD (PCMF) and ESD protection only (PESD)
- ▶ No ferrite saturation, widest differential pass-band compared to other Si-based solutions and Ferrite-based solutions with additional 15GHz ESD protection
- ▶ Lowest ESD-clamping compared to all other Common Mode Filters: provides high system-level robustness even for the most sensitive USB3.1 transceiver
- ▶ Strongest Common Mode rejection for the USB3.1 fundamentals at 2.5 and 5 GHz of all USB3 Common Mode Filters
- ▶ Smallest footprint
- ▶ PCMF1USB3S allows very easy RF-routing together with the new USB Type-C connector


USB 3.x 10 Gbps eye diagrams

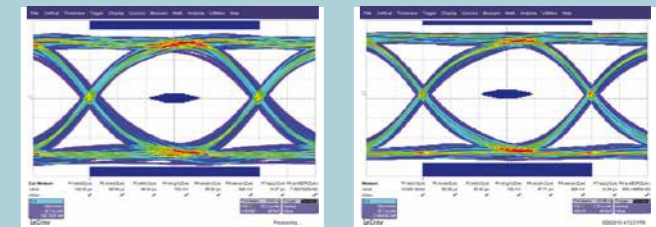

PCMFxUSB3S

Only test board

Clamping performance of PCMFxUSB3S compared to other silicon Common Mode Filter

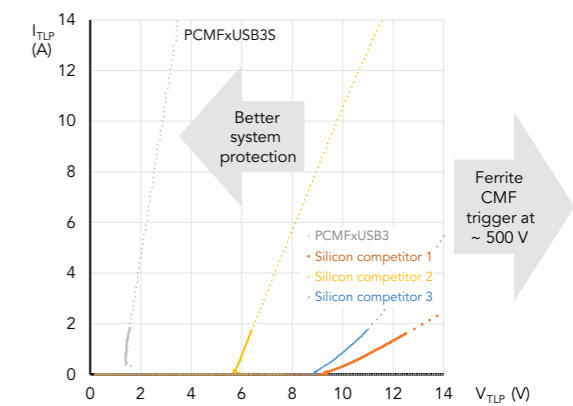

The superior system-level protection is shown in the lower TLP clamping voltage

ESD protection, TVS, filtering and signal conditioning

USB 3.x and eSATA protection and filtering for high-speed and super-speed lines

types in **bold** represent new products

Baseband interface	Number of protected lines	C _d (pF)	ESD rating max (kV)	R _{dyn} (Ω)	Remark	Type	Package	Size (mm)	
USB3.0 - 5 Gbps	4	0.55	8	0.3 / 0.4	ESD Protection for high-speed interfaces	IP4292CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48	
		0.5	10			PUSB3F96			
USB3.1 - 10 Gbps	4	0.17	15	0.4	TrEOS Protection	PUSB3AB4	DFN2111-7 (SOT1358)	2.1 x 1.1 x 0.48	
		0.29	15			PUSB3FR6			
		0.27	15			PUSB3TB6			
	6	0.15	15	0.4		PUSB3AB6	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48	
						PUSB3FR4			
	1	0.2	0.1	10		0.45	PESD5V0R1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
			0.15	15		0.25	PESD5V0H1BSF		
			0.2	20		0.23	PESD5V0C1BSF		
			0.2	20		0.23	PESD3V3CIBSF		
			0.45	20		0.1	PESD5V0C1USF		
	2	0.25	15	0.16		PESD1USB3S	WLCSP5	1.2 x 0.8 x 0.6	
Common Mode Filter with TrEOS Protection for ultra high-speed interfaces					PCMF1USB3S				

http://www.nxp.com/products/discretes-and-logic/esd-protection-tvs-filtering-and-signal-conditioning/usb-type-c-protection-family:GRP_13811

Common Mode Filter for USB 3.x

types in **bold** represent new products

Baseband interface	Number of protected line pairs	Type	Differential Mode 3dB frequency	Common Mode rejection 800 MHz - 10 GHz	C _d typical	V _{RRM}	ESD rating	Channel series resistance	Package	Size (mm)
USB3.x	1	PCMF1USB3S	6 GHz	>12	0.3	5	15	3	WLCSP5	0.8 x 1.2 x 0.5
	2	PCMF2USB3S							WLCSP10	1.6 x 1.2 x 0.5
	3	PCMF3USB3S							WLCSP15	2.4 x 1.2 x 0.5
	1	PESD1USB3S	WLCSP5	0.8 x 1.2 x 0.5						
	2	PESD2USB3S	WLCSP10	1.6 x 1.2 x 0.5						
	3	PESD3USB3S	WLCSP15	2.4 x 1.2 x 0.5						

¹ according to IEC 61000-4-2 (contact discharge)

Common Mode Filter for video interfaces

types in **bold** represent new products


Baseband interface	Number of protected line pairs unidirectional	Number of protected line pairs bidirectional	Type	Differential Mode 3 dB frequency (typ.)	C_{line} pF typical	V_{RWM}	ESD rating ⁽¹⁾ max (kV)	Channel series resistance	Package	Size (mm)
MIPI D-PHY	2		PCMF2DFN1	>2 GHz	0.8			5 Ω	DFN2520-9 (SOT1333)	2.5 x 2.0 x 0.48
	3		PCMF3DFN1	>2 GHz				5 Ω	DFN4020-14 (SOT1334)	4.0 x 2.0 x 0.48
HDMI2.0	1	0	PCMF1HDMI2S	>6 GHz	0.3	5	15	3 Ω	WLCSP5	0.8 x 1.2 x 0.5
	2		PCMF2HDMI2S					3 Ω	WLCSP10	1.6 x 1.2 x 0.5
	3		PCMF3HDMI2S					3 Ω	WLCSP15	2.4 x 1.2 x 0.5

⁽¹⁾ according to IEC 61000-4-2 (contact discharge)

In the spotlight

PCMFxHDMI2S series: 1, 2 and 3 line pair Common Mode Filters with ESD protection for HDMI 1.4 and 2.0

- Very wide differential pass band >6 GHz
- Very broadband Common Mode attenuation
- Very low clamping ESD protection, excellent SoC protection
- Smallest footprint

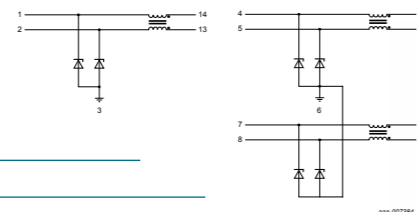

Ethernet protection

types in **bold** represent new products



Baseband interface	Number of protected lines	C_{line} (pF)	Remark	Type	Package	Size (mm)
LAN	1	0.6	Ethernet ESD protection $V_{RWM} = 3.3$ V	PESD3V3U1UT	SOT23	2.9 x 1.3 x 1.0
			Ethernet ESD protection $V_{RWM} = 5.0$ V	PESD5V0U1UT		
			Ethernet ESD protection $V_{RWM} = 12$ V	PESD12VU1UT		
			Ethernet ESD protection $V_{RWM} = 15$ V	PESD15VU1UT		
	Ethernet ESD protection $V_{RWM} = 24$ V	PESD24VU1UT				
	4	1	Ethernet ESD protection	IP4220CZ6	SOT457 (SC-74)	2.9 x 1.5 x 1.0

HDMI and memory-card signal conditioning

types in **bold** represent new products

Interface	Number of protected lines	Buffer	Level shifter	C_{line} (pF)	Resistor (Ω)	LDO	Remark	Type	Package	Size (mm)
HDMI tx	5			-		-	Fully integrated for HDMI control lines including buffer for DDC, CEC, and Hot Plug module	IP4791CZ12	DFN2521-12 (SOT1156)	2.5 x 2.1 x 0.48
	13	yes	yes	100 Ω differential impedance	internal	CEC LDO, 5 V LDO	Fully integrated HDMI source solution with current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4786CZ32	DFN5050-32 (SOT617)	5.0 x 5.0 x 0.85
							Fully integrated HDMI sink solution with buffer, and level shifter for DDC, CEC, and Hot Plug			
							Fully integrated HDMI source solution with enhanced ESD protection, current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug			
HDMI2.0	13	yes	yes	100 Ω differential impedance	integrated	-	Fully integrated HDMI source solution with small package, current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4786CZ32S	DFN4040-32 (SOT1318-1)	4.0 x 4.0 x 0.50
							Fully integrated HDMI source solution with current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4786CZ32		5.0 x 5.0 x 0.85
							Fully integrated HDMI source solution with enhanced ESD protection, current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4787CZ32	DFN5050-32 (SOT617)	5.0 x 5.0 x 0.85
							Fully integrated HDMI source solution with enhanced ESD protection, current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4788CZ32		5.0 x 5.0 x 0.85
							Fully integrated HDMI source solution in a small package with current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4786CZ32S	DFN4040-32 (SOT1318-1)	4.0 x 4.0 x 0.5
SD3.0	6	yes	yes	-	internal	1.8 V LDO	SD 3.0-compliant memory card with integrated dual voltage-level translator with EMI filter and ESD protection	IP4856CX25/C	WLCSP25	2.4 x 2.4 x 0.4
							Fully integrated SD 3.0 card level shifter with buffer technology, LDO, and EMI filter	IP4855CX25	WLCSP25	2.4 x 2.4 x 0.4

The IP478x-series offers a complete HDMI-interface in one package.

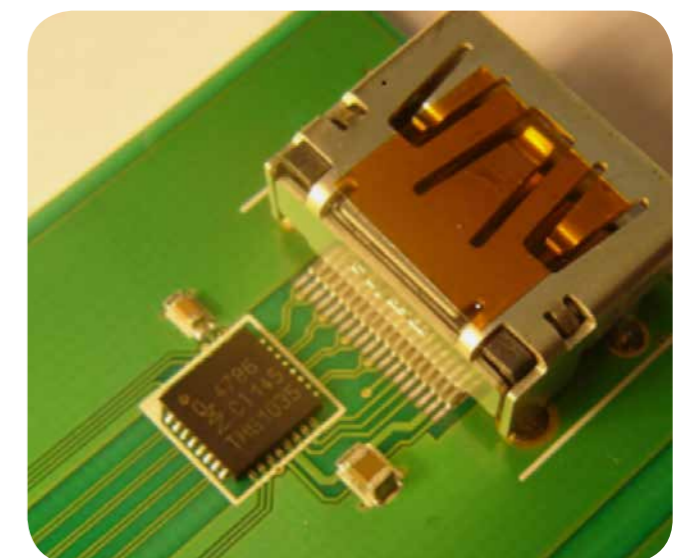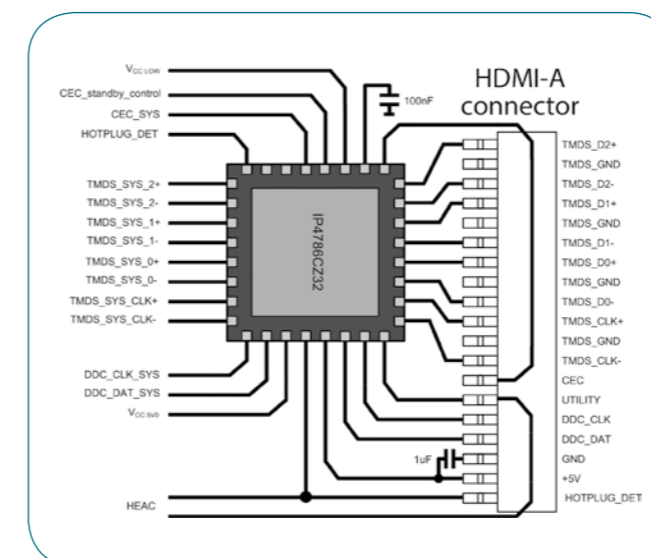


Video interface protection


types in **bold** represent new products

Baseband interface	Number of protected lines	C _{line} (pF)	Remark	Type	Package	Size (mm)
Display port	4	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TBR		2.5 x 1.0 x 0.48
		0.55	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR		
		0.5	ESD protection for ultra high-speed interfaces	IP4294CZ10-TBR		
			ESD protection for ultra high-speed interfaces	PHDMI2F4		
		0.8	ESD protection for ultra high-speed interfaces	IP4285CZ9-TBB		
HDMI	4	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48
		0.8	ESD protection for ultra high-speed interfaces	IP4285CZ9-TBB	DFN2110-9 (SOT1178)	2.1 x 1.0 x 0.48
		0.55	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48
		0.5	ESD protection for HDMI 2.0	PHDMI2F4		
			ESD protection for ultra high-speed interfaces	IP4294CZ10-TBR		
LVDS	4	0.8	Very low clamp ESD protection with 12 kV IEC ruggedness	PUSB2X4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0
		0.8	Very low clamp ESD protection with 12 kV IEC ruggedness	PUSB2X4Y	SOT363 (SC-88)	2.0 x 1.25 x 0.95

PHDMI2F4 PESD HDMI application schematic

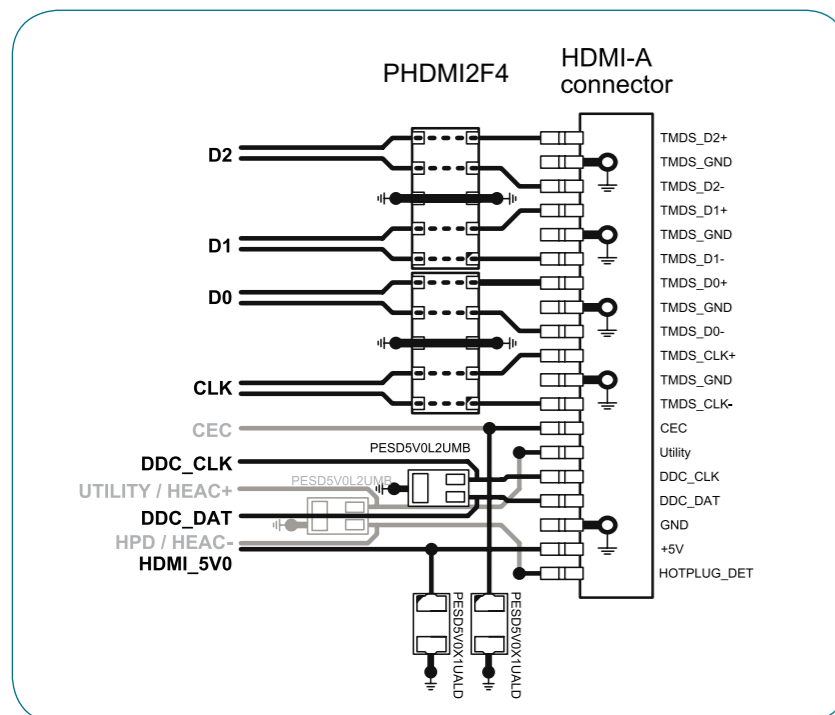

NFC antenna protection

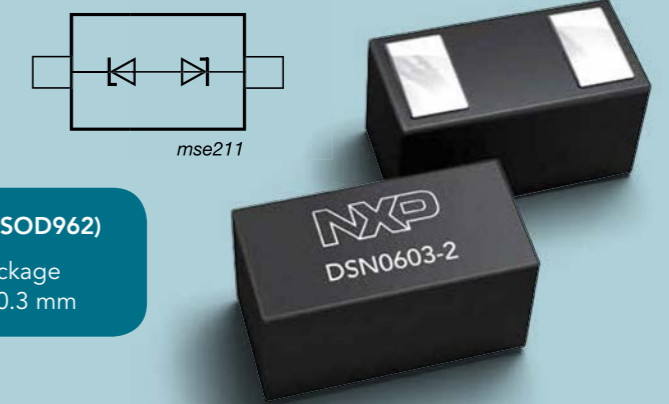

DSN0603-2 (SOD962)
Single package
0.6 x 0.3 x 0.3 mm


Features

- ▶ Bidirectional configuration, allowing operating voltages up to 18 or 24 V
- ▶ Very low capacitance, enabling easy design of the antenna-matching circuit
- ▶ Very small voltage dependency of the diode capacitance, avoiding intermodulation distortion
- ▶ Small form-factor packages of 1006 (0402 inch) and 0603 (0201 inch) standard size

Benefits


The phone's NFC antenna is often integrated into the battery cover or the battery itself and is connected to the NFC tags via small contacts on the phone, creating an entry point for ESD strikes that are potentially hazardous to the NFC IC. These new NXP devices are optimized for the requirements of the NFC system and ensure the best-possible protection of the NFC IC.

Circuit diagram

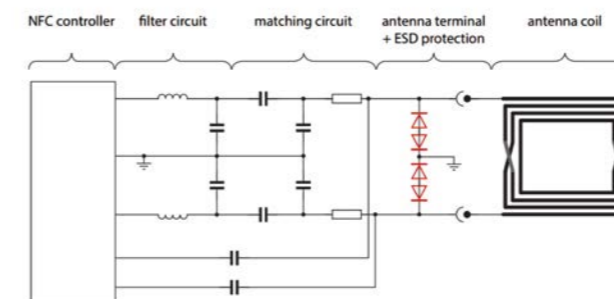

Using tiny packages makes PCB design more flexible

Diode capacitance versus bias voltage

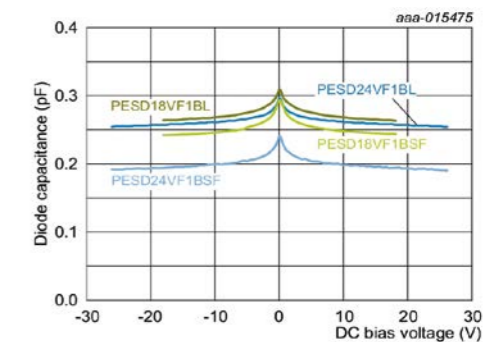






The highly linear diode capacitance, with very small variation, minimizes signal degradation

ESD protection, TVS, filtering and signal conditioning






NFC antenna protection

types in **bold** represent new products




Interface	Number of protected lines (Bidirectional)	V _{RWM} [V]	C _{line, typ} [pF]	C _{line, max} [pF]	ESD rating ^[1] max [kV]	Configuration	Type	Package	Size
NFC Antenna	1	18	0.28	0.45	10		PESD18VF1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
							PESD1NFC-SF		1.0 x 0.6 x 0.48
			PESD18VF1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48				
			PESD1NFC-L		1.0 x 0.6 x 0.48				
		24	0.25	0.4	10		PESD24VF1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
							PESD2NFC-SF		1.0 x 0.6 x 0.48
			PESD24VF1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48				
			PESD2NFC-L		1.0 x 0.6 x 0.48				

^[1] according to IEC 61000-4-2 (contact discharge)

LCD/camera protection and filtering







Baseband interface	Number of protected lines	Line small-signal equivalents			Digital interface clock speed (MHz)	Insertion loss S21 ~ -3 dB (MHz)	Type	Package	Size (mm)	
		R _{line} (Ω)	C _{line} (pF)	L _{line} (nH)						
	4	40	18	-	~100	300	IP4252CZ8-4 -TTL	DFN1714-8 (SOT1166) 	1.7 x 1.35 x 0.52	
		100	45	-	~40	130	IP4254CZ8-4-TTL			
			15	-	~110	330	IP4251CZ8-4-TTL			
		200	45	-	~35	110	IP4253CZ8-4-TTL			
	6	40	18	-	~100	300	IP4252CZ12-6-TTL	DFN2514-12 (SOT1167) 	2.5 x 1.35 x 0.53	
		100	45	-	~40	130	IP4254CZ12-6-TTL			
			15	-	~110	330	IP4251CZ12-6-TTL			
		200	45	-	~35	110	IP4253CZ12-6-TTL			
	100	54	-	~35	98	PEMI6CSP/RW	WLCSP15 	2.36 x 1.05 x 0.61		
		8	40	18	-	~100	300	IP4252CZ16-8-TTL	DFN3314-16 (SOT1168) 	3.3 x 1.35 x 0.53
			100	45	-	~40	130	IP4254CZ16-8-TTL		
				15	-	~110	330	IP4251CZ16-8-TTL		
200	45	-	~35	110	IP4253CZ16-8-TTL					
100	54	-	~35	98	PEMI8CSP/RW/P	WLCSP20 	3.16 x 1.05 x 0.61			

Audio interface protection and filtering

Baseband interface	Number of protected lines	Line small-signal equivalents		Remark	Type	Package	Size (mm)
		R _{line}	C _{line} (pF)				
Audio	2	-	18	2 line bidirectional with I _{PM} =9A	PESD5V0V2BM	SOT883 	1.0 x 0.6 x 0.48
		-	-	-	PESD5V0V2BMB	SOT883B 	1.0 x 0.6 x 0.37
		68 Ω	110	Single-ended or differential microphone	IP4049CX5/LF	WLCSP5 	0.91 x 1.28 x 0.65

Memory- and SIM-card protection and filtering

types in **bold** represent new products

Baseband interface	Number of protected lines	Line small-signal equivalents		Digital interface clock speed (MHz)	Remark	Type	Package	Size (mm)
		R _{line}	C _{line} (pF)					
SIM card	3	47 Ω / 100 Ω	20	~20	Integrated SIM-card EMI filter and ESD protection	IP4264CZ8-20-TTL	DFN1714-8 (SOT1166) 	1.7 x 1.35 x 0.52
	4	-	1	~240	Quad-channel, low-capacitance ESD protection	IP4221CZ6-S	DFN1410-6 (SOT886) 	1.0 x 1.0 x 0.48
					Quad-channel, low-capacitance ESD protection	IP4221CZ6-XS	DFN1010-6 (SOT891) 	1.0 x 1.0 x 0.48
SD-card / MMC	6	40 Ω	12	>52	(Mini) SD card/trans flash ESD protection, EMI filter	IP4252CZ12-6-TTL	DFN2514-12 (SOT1167) 	2.5 x 1.35 x 0.53
		40 Ω / 100 Ω	11	-	6-channel Micro-SD memory-card interface ESD protection filter	IP4340CX15	WLCSP15 	1.56 x 1.56 x 0.5
SD 3.0	6	-	0.27	5000	6-line bidirectional ESD protection for ultra high-speed interfaces	PUSB3TB6	DFN2111-7 (SOT1358) 	2.1 x 1.1 x 0.5
			0.35			PUSB3FR6		
			0.15			PUSB3AB6		

Automotive high-speed network protection

types in **bold** represent new products

Number of protected lines	V_{RWM} (V)	C_{line} typ (pF)	I_{RM} max @3V (μ A)	ESD rating ⁽¹⁾ max (kV)	Configuration	Type	Package	Size (mm)
4	5.5	0.5	1	10		PESD2LVDS	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.5
	5.5	0.6	1	8		PESD1LVDS	DFN2510-10 (SOT1165)	2.5 x 1.0 x 0.48
	5.5	0.6	1	8		PRTR5V0U4D	SOT457	2.9 x 1.5 x 1.0

⁽¹⁾ according to IEC 61000-4-2 (contact discharge)

Automotive in-vehicle network bus line protection

types in **bold** represent new products

Number of protected lines bidirectional	V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	P_{PP} ⁽¹⁾ max (W)	ESD rating ⁽²⁾ max (kV)	I_r max [μ A] @ V_{RWM}	Configuration	Type	Package	Size (mm)
1	15 (diode 1) 24 (diode 2)	13	17	160	23	0.05		PESD1LIN	SOD323 (SC-76)	1.7 x 1.25 x 0.95
2	24	11	17	200	23	0.05		PESD1CAN	SOT23	2.9 x 1.3 x 1.0
		25	30	230	30	0.01		PESD2CAN		
		11	17	200	23	0.05		PESD1FLEX		
		9.3	12	150	23	0.05		PESD1CAN-U	SOT323	2.0 x 1.25 x 0.95
1	26.5	9.3	11	150	23	0.05		PESD1IVN-U	SOT323	2.0 x 1.25 x 0.95
2								PESD2IVN-U		


⁽¹⁾ 8 / 20 μ s surge pulse according to IEC 61000-4-5

⁽²⁾ according to IEC 61000-4-2 (contact discharge)

In the spotlight

PESD2IVN-U: CAN bus protection in very small SOT323 package

- Protection for 2 in-vehicle network BUS lines
- High reverse standoff voltage $V_{RWM} = 26.5$ V
- Very small SOT323 package (2.0 x 1.25 x 0.95 mm)
- AEC-Q101 compliant
- ESD robustness of up to 23 kV (contact)
- Very good capacitance matching



Surge protection for charger ports in mobile devices

A new powerful surge protection device in a 1.6 x 0.8 mm small, and 0.25 mm low package for slim mobiles



DSN1608-2 (SOD963)

Single package
1.6 x 0.8 x 0.25 mm

Surge pulses from the power supply, e.g. via a car charger, are a severe threat for the charger port VBUS line of smart phones and other portables. Supply voltages of these chargers often exceed the 5 V level – requiring high reverse standoff voltages.

NXP's PTVSxZ1USK series is ideally suited to protect the charger port and offers

- Superior electrical performance
- High PCB design flexibility
- Easy routing

Features and benefits

- 7 types from $V_{RWM} = 5$ to 26 V
- High surge rating
- Very compact and thin package
- Low leakage current: down to 1 nA, reduces power consumption
- Dynamic resistance down to 0.06 Ohm
- High ESD robustness: $V_{ESD} = 30$ kV (IEC61000-4-2)

TVS diodes for mobile applications in DSN1608-2

Type	Package	Type	Package	V_{RWM} (V)	V_{br} min (V)	V_{br} max (V)	V_{ci} @ I_{ppm} 8/20 μ s (V)	I_{ppm} 8/20 μ s (A)	P_{ppm} 8/20 μ s (W)	V_{ci} @ I_{ppm} 10/1000 μ s (V)	I_{ppm} 10/1000 μ s (A)	P_{ppm} 10/1000 μ s (W)	I_{rm} typ @ V_{RWM} (nA)	I_{rm} max @ V_{RWM} (nA)	Rdyn (TLF) - 8/20 μ s
PTVS5V0Z1USK	SOD964 1.6 x 0.8 x 0.37	PTVS5V0Z1USKN	SOD963 1.6 x 0.8 x 0.25	5	6.4	7.80	18	80	1200	12	20	200	1	1000	0.06
PTVS7V5Z1USK		PTVS7V5Z1USKN		7.5	8.33	9.65	24	92	2000	13.9	17.5	200	0.1	200	0.08
PTVS10VZ1USK		PTVS10VZ1USKN		10	11.1	12.9	27.5	73	2000	17.8	11.1	170	0.1	200	0.1
PTVS12VZ1USK		PTVS12VZ1USKN		12	13.3	15.4	29	65	2100	19.9	10.1	180	0.1	200	0.1
PTVS15VZ1USK		PTVS15VZ1USKN		15	16.7	19.4	35.4	52	1700	27.6	7.5	175	0.1	200	0.1
PTVS18VZ1USK		PTVS18VZ1USKN		18	20	23.2	40.5	41	1700	30.2	6.9	190	0.1	200	0.17
PTVS20VZ1USK		PTVS20VZ1USKN		20	22.2	25.4	47	38	1800	36.0	6	175	0.1	200	0.16
PTVS26VZ1USK		PTVS26VZ1USKN		26	28.9	33.4	61	30	1600	48.0	3.76	150	0.1	200	0.16

Battery and charger port protection – PESD devices

Baseband interface	Number of protected lines	C_{line} (pF)	V_{RWM} (V)	I_{ppm} 8/20 μ s (A)	Type	Package	Size (mm)
Battery & charger protection	1 x uni	160	12	22.5	PESD12VS1UJ	SOD323F (SC-90)	1.7 x 1.25 x 0.7
		480	5	22.5	PESD5V0S1UJ		
		160	12	47	PESD12VS1UA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
		480	5	47	PESD5V0S1UA		
Battery & charger protection	2 x bi	18	5	9	PESD5V0V2BM	SOT883	1.0 x 0.6 x 0.48
		18	5	9	PESD5V0V2BMB	SOT883B	1.0 x 0.6 x 0.37
		35	5	15	PESD5V0S2BQA	SOT1215	1.1 x 1.0 x 0.37

TVS diodes for mobile applications

Power (W) / 1000 μ s waveform ⁽¹⁾	V_{RWM} (V)	$V_{BR, min}$ (V) @ I_R	$V_{BR, typ}$ (V) @ I_R	$V_{BR, max}$ (V) @ I_R	I_R (mA)	$V_{CL, max}$ ⁽¹⁾ (V) @ I_{PP}	I_{PP} ⁽¹⁾ (A)	$I_{RM, typ}$ (μ A) @ V_{RWM}	$I_{RM, max}$ (μ A) @ V_{RWM}	Type	Package	Size (mm)
300	7.5	8.33	8.77	9.21	1	12.9	23.3	0.3	50	PTVS7V5U1UPA	DFN2020-3 (SOT1061)	2.0 x 2.0 x 0.62
	10	11.1	11.7	12.3	1	17	17.6	0.008	2.5	PTVS10VU1UPA		
	12	13.3	14	14.7	1	19.9	15.1	0.005	2.5	PTVS12VU1UPA		
	15	16.7	17.6	18.5	1	24.4	12.3	0.001	0.1	PTVS15VU1UPA		
	18	20	21	22.1	1	29.2	10.3	0.001	0.1	PTVS18VU1UPA		
	26	28.9	30.4	31.9	1	42.1	7	0.001	0.1	PTVS26VU1UPA		

⁽¹⁾ 10 / 1000 μ s according to IEC 61643-321

TVS diodes, 24/40 W

Power (W) / 1000 μ s waveform ⁽¹⁾	V_{RWM} (V)	$V_{BR, min}$ (V) @ I_R	$V_{BR, typ}$ (V) @ I_R	$V_{BR, max}$ (V) @ I_R	I_R (mA)	ESD rating ⁽¹⁾ max (kV)	$C_{lim, typ}$ (pF)	$V_{CL, max}$ ⁽¹⁾ (V) @ I_{PP}	I_{PP} ⁽¹⁾ (A)	$I_{RM, max}$ (μ A) @ V_{RWM}	Configuration	Type	Package	Size (mm)
24	3	5.32	5.6	5.88	20	30	210	8	3	5		MMBZ5V6AL	SOT23	2.9 x 1.3 x 1.0
	3	5.89	6.2	6.51	1	30	175	8.7	2.76	0.2		MMBZ6V2AL		
	4.5	6.48	6.8	7.14	1	30	150	9.6	2.5	0.3		MMBZ6V8AL		
	6	8.65	9.1	9.56	1	30	155	14	1.7	0.1		MMBZ9V1AL		
	6.5	9.5	10	10.5	1	30	130	14.2	1.7	0.02		MMBZ10VAL		
40	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005	MMBZ12VAL			
	12	14.25	15	15.75	1	30	85	21	1.9	0.005	MMBZ15VAL			
	14.5	17.1	18	18.9	1	30	70	25	1.6	0.005	MMBZ18VAL			
	17	19	20	21	1	30	65	28	1.4	0.005	MMBZ20VAL			
	22	25.65	27	28.35	1	30	48	40	1	0.005	MMBZ27VAL			
	26	31.35	33	34.65	1	30	45	46	0.87	0.005	MMBZ33VAL			
	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005		MMBZ12VDL		
	12.8	14.3	15	15.8	1	30	85	21.2	1.9	0.005		MMBZ15VDL		
	14.5	17.1	18	18.9	1	30	70	25	1.6	0.005		MMBZ18VCL		
	17	19	20	21	1	30	65	28	1.4	0.005		MMBZ20VCL		
22	25.65	27	28.35	1	30	48	38	1	0.005	MMBZ27VCL				
26	31.35	33	34.65	1	30	45	46	0.87	0.005	MMBZ33VCL				


⁽¹⁾ 10 / 1000 μ s according to IEC 61643-321 ⁽²⁾ according to IEC 61000-4-2 (contact discharge)

TVS diodes, 400 W

Power (W) / 10/1000 μ s waveform ⁽¹⁾	V_{RWM} (V)	$V_{BR, min}$ (V) @ I_R	$V_{BR, typ}$ (V) @ I_R	$V_{BR, max}$ (V) @ I_R	I_R (mA)	$V_{CL, max}$ ⁽¹⁾ (V) @ I_{PP}	I_{PP} ⁽¹⁾ (A)	$I_{RM, typ}$ (μ A) @ V_{RWM}	$I_{RM, max}$ (μ A) @ V_{RWM}	Type (T _J max = 150 °C)	Type (T _J max = 185 °C)	Package	Size (mm)
350	3.5	5.20	5.60	6.00	10	8.0	43.8	5	600	PTVS3V3S1UR	PTVS3V3S1UTR	SOD123W	2.6 x 1.7 x 1.0
400	5.0	6.40	6.70	7.00	10	9.2	43.5	5	400	PTVS5V0S1UR	PTVS5V0S1UTR		
	6.0	6.67	7.02	7.37	10	10.3	38.8	5	400	PTVS6V0S1UR	PTVS6V0S1UTR		
	6.5	7.22	7.60	7.98	10	11.2	35.7	5	250	PTVS6V5S1UR	PTVS6V5S1UTR		
	7.0	7.78	8.20	8.60	10	12.0	33.3	3	100	PTVS7V0S1UR	PTVS7V0S1UTR		
	7.5	8.33	8.77	9.21	1	12.9	31.0	0.2	50	PTVS7V5S1UR	PTVS7V5S1UTR		
	8.0	8.89	9.36	9.83	1	13.6	29.4	0.03	25	PTVS8V0S1UR	PTVS8V0S1UTR		
	8.5	9.44	9.92	10.40	1	14.4	27.8	0.01	10	PTVS8V5S1UR	PTVS8V5S1UTR		
	9.0	10.00	10.55	11.10	1	15.4	26.0	0.005	5	PTVS9V0S1UR	PTVS9V0S1UTR		
	10	11.10	11.70	12.30	1	17.0	23.5	0.005	2.5	PTVS10VS1UR	PTVS10VS1UTR		
	11	12.20	12.85	13.50	1	18.2	22.0	0.005	2.5	PTVS11VS1UR	PTVS11VS1UTR		
	12	13.30	14.00	14.70	1	19.9	20.1	0.005	2.5	PTVS12VS1UR	PTVS12VS1UTR		
	13	14.40	15.15	15.90	1	21.5	18.6	0.001	0.1	PTVS13VS1UR	PTVS13VS1UTR		
	14	15.60	16.40	17.20	1	23.2	17.2	0.001	0.1	PTVS14VS1UR	PTVS14VS1UTR		
	15	16.70	17.60	18.50	1	24.4	16.4	0.001	0.1	PTVS15VS1UR	PTVS15VS1UTR		
	16	17.80	18.75	19.70	1	26.0	15.4	0.001	0.1	PTVS16VS1UR	PTVS16VS1UTR		
	17	18.90	19.90	20.90	1	27.6	14.5	0.001	0.1	PTVS17VS1UR	PTVS17VS1UTR		
	18	20.00	21.00	22.10	1	29.2	13.7	0.001	0.1	PTVS18VS1UR	PTVS18VS1UTR		
	20	22.20	23.35	24.50	1	32.4	12.3	0.001	0.1	PTVS20VS1UR	PTVS20VS1UTR		
	22	24.40	25.60	26.90	1	35.5	11.3	0.001	0.1	PTVS22VS1UR	PTVS22VS1UTR		
	24	26.70	28.10	29.50	1	38.9	10.3	0.001	0.1	PTVS24VS1UR	PTVS24VS1UTR		
	26	28.90	30.40	31.90	1	42.1	9.5	0.001	0.1	PTVS26VS1UR	PTVS26VS1UTR		
	28	31.10	32.80	34.40	1	45.4	8.8	0.001	0.1	PTVS28VS1UR	PTVS28VS1UTR		
	30	33.30	35.10	36.80	1	48.4	8.3	0.001	0.1	PTVS30VS1UR	PTVS30VS1UTR		
	33	36.70	38.70	40.60	1	53.3	7.5	0.001	0.1	PTVS33VS1UR	PTVS33VS1UTR		
36	40.00	42.10	44.20	1	58.1	6.9	0.001	0.1	PTVS36VS1UR	PTVS36VS1UTR			
40	44.40	46.80	49.10	1	64.5	6.2	0.001	0.1	PTVS40VS1UR	PTVS40VS1UTR			
43	47.80	50.30	52.80	1	69.4	5.8	0.001	0.1	PTVS43VS1UR	PTVS43VS1UTR			
45	50.00	52.65	55.30	1	72.7	5.5	0.001	0.1	PTVS45VS1UR	PTVS45VS1UTR			
48	53.30	56.10	58.90	1	77.4	5.2	0.001	0.1	PTVS48VS1UR	PTVS48VS1UTR			
51	56.70	59.70	62.70	1	82.4	4.9	0.001	0.1	PTVS51VS1UR	PTVS51VS1UTR			
54	60.00	63.15	66.30	1	87.1	4.6	0.001	0.1	PTVS54VS1UR	PTVS54VS1UTR			
58	64.40	67.80	71.20	1	93.6	4.3	0.001	0.1	PTVS58VS1UR	PTVS58VS1UTR			
60	66.70	70.20	73.70	1	96.8	4.1	0.001	0.1	PTVS60VS1UR	PTVS60VS1UTR			
64	71.10	74.85	78.60	1	103.0	3.9	0.001	0.1	PTVS64VS1UR	PTVS64VS1UTR			

ESD protection, TVS, filtering and signal conditioning

TVS diodes, 600 W

Power (W) (10 / 1000 µs waveform) (1)	V _{RWM} (V)	V _{BR min} (V) @ I _R	V _{BR typ} (V) @ I _R	V _{BR max} (V) @ I _R	I _R (mA)	V _{CL max} (V) @ I _{PP}	I _{PP} (A)	I _{RM typ} (µA) @ V _{RWM}	I _{RM max} (µA) @ V _{RWM}	Type (T _{j max} = 150 °C)	Type (T _{j max} = 185 °C)	Package	Size (mm)
3.5	5.20	5.60	6.00	10	8	75	5	600	PTVS3V3P1UP	PTVS3V3P1UTP	SOD128 	3.8 x 2.6 x 1.0	
5	6.40	6.70	7.00	10	9.2	65.2	5	400	PTVS5V0P1UP	PTVS5V0P1UTP			
6	6.67	7.02	7.37	10	10.3	58.3	5	400	PTVS6V0P1UP	PTVS6V0P1UTP			
6.5	7.22	7.60	7.98	10	11.2	53.6	5	250	PTVS6V5P1UP	PTVS6V5P1UTP			
7	7.78	8.20	8.60	10	12	50	3	100	PTVS7V0P1UP	PTVS7V0P1UTP			
7.5	8.33	8.77	9.21	1	12.9	46.5	0.2	50	PTVS7V5P1UP	PTVS7V5P1UTP			
8	8.89	9.36	9.83	1	13.6	44.1	0.03	25	PTVS8V0P1UP	PTVS8V0P1UTP			
8.5	9.44	9.92	10.40	1	14.4	41.7	0.01	10	PTVS8V5P1UP	PTVS8V5P1UTP			
9	10.00	10.55	11.10	1	15.4	39	0.005	5	PTVS9V0P1UP	PTVS9V0P1UTP			
10	11.10	11.70	12.30	1	17	35.3	0.005	2.5	PTVS10VP1UP	PTVS10VP1UTP			
11	12.20	12.85	13.50	1	18.2	33	0.005	2.5	PTVS11VP1UP	PTVS11VP1UTP			
12	13.30	14.00	14.70	1	19.9	30.2	0.005	2.5	PTVS12VP1UP	PTVS12VP1UTP			
13	14.40	15.15	15.90	1	21.5	27.9	0.001	0.1	PTVS13VP1UP	PTVS13VP1UTP			
14	15.60	16.40	17.20	1	23.2	25.9	0.001	0.1	PTVS14VP1UP	PTVS14VP1UTP			
15	16.70	17.60	18.50	1	24.4	24.6	0.001	0.1	PTVS15VP1UP	PTVS15VP1UTP			
16	17.80	18.75	19.70	1	26	23.1	0.001	0.1	PTVS16VP1UP	PTVS16VP1UTP			
17	18.90	19.90	20.90	1	27.6	21.7	0.001	0.1	PTVS17VP1UP	PTVS17VP1UTP			
18	20.00	21.00	22.10	1	29.2	20.5	0.001	0.1	PTVS18VP1UP	PTVS18VP1UTP			
20	22.20	23.35	24.50	1	32.4	18.5	0.001	0.1	PTVS20VP1UP	PTVS20VP1UTP			
22	24.40	25.60	26.90	1	35.5	16.9	0.001	0.1	PTVS22VP1UP	PTVS22VP1UTP			
24	26.70	28.10	29.50	1	38.9	15.4	0.001	0.1	PTVS24VP1UP	PTVS24VP1UTP			
26	28.90	30.40	31.90	1	42.1	14.2	0.001	0.1	PTVS26VP1UP	PTVS26VP1UTP			
28	31.10	32.80	34.40	1	45.4	13.2	0.001	0.1	PTVS28VP1UP	PTVS28VP1UTP			
30	33.30	35.10	36.80	1	48.4	12.4	0.001	0.1	PTVS30VP1UP	PTVS30VP1UTP			
33	36.70	38.70	40.60	1	53.3	11.3	0.001	0.1	PTVS33VP1UP	PTVS33VP1UTP			
36	40.00	42.10	44.20	1	58.1	10.3	0.001	0.1	PTVS36VP1UP	PTVS36VP1UTP			
40	44.40	46.80	49.10	1	64.5	9.3	0.001	0.1	PTVS40VP1UP	PTVS40VP1UTP			
43	47.80	50.30	52.80	1	69.4	8.6	0.001	0.1	PTVS43VP1UP	PTVS43VP1UTP			
45	50.00	52.65	55.30	1	72.7	8.3	0.001	0.1	PTVS45VP1UP	PTVS45VP1UTP			
48	53.30	56.10	58.90	1	77.4	7.8	0.001	0.1	PTVS48VP1UP	PTVS48VP1UTP			
51	56.70	59.70	62.70	1	82.4	7.3	0.001	0.1	PTVS51VP1UP	PTVS51VP1UTP			
54	60.00	63.15	66.30	1	87.1	6.9	0.001	0.1	PTVS54VP1UP	PTVS54VP1UTP			
58	64.40	67.80	71.20	1	93.6	6.4	0.001	0.1	PTVS58VP1UP	PTVS58VP1UTP			
60	66.70	70.20	73.70	1	96.8	6.2	0.001	0.1	PTVS60VP1UP	PTVS60VP1UTP			
64	71.10	74.85	78.60	1	103	5.8	0.001	0.1	PTVS64VP1UP	PTVS64VP1UTP			

(1) 10 / 1000 µs according to IEC 61643-321

In the spotlight

High-temperature TVS series in FlatPower package


Available in 400 W (PTVSxS1UTR) and 600 W (PTVSxP1UTP) power classes with 35 devices each

Very high maximal junction temperature of 185 °C


Reverse standoff voltages from 3.3 to 64 V

Low height, high performance - save board space by replacing SMA & SMB packages with low-profile SOD123W and SOD128 packages


AEC-Q101 qualified

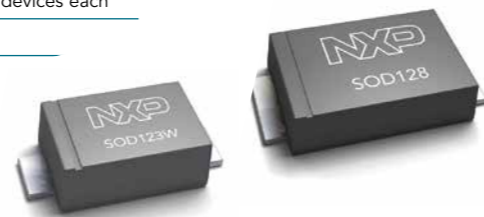


Protection and signal-conditioning nomenclature

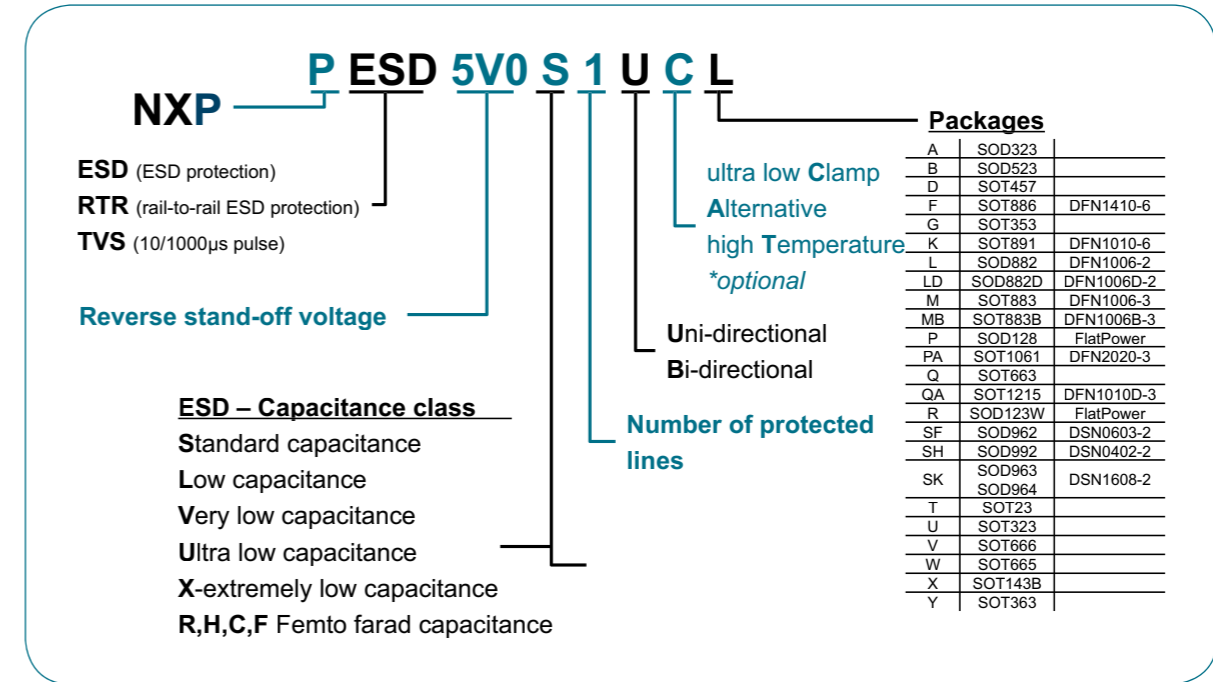


Application specific protection nomenclature

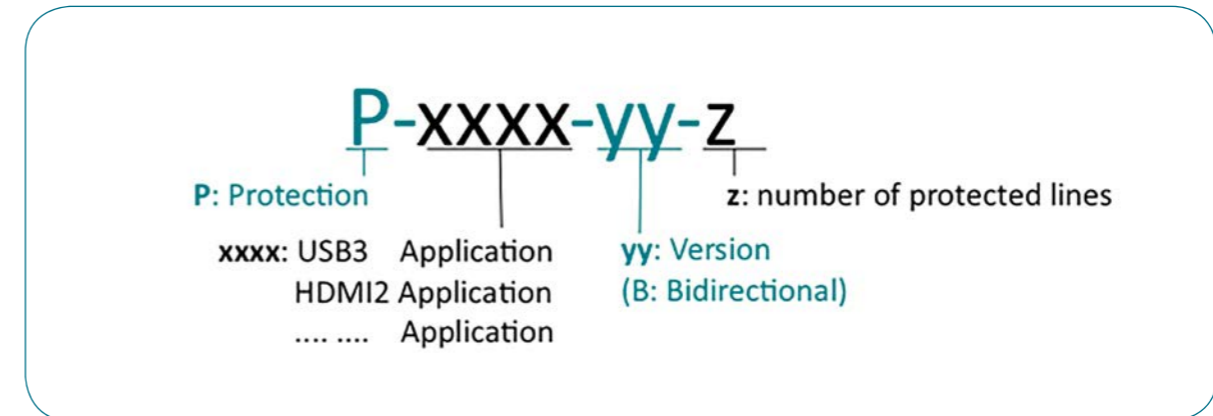

Application specific filtering nomenclature

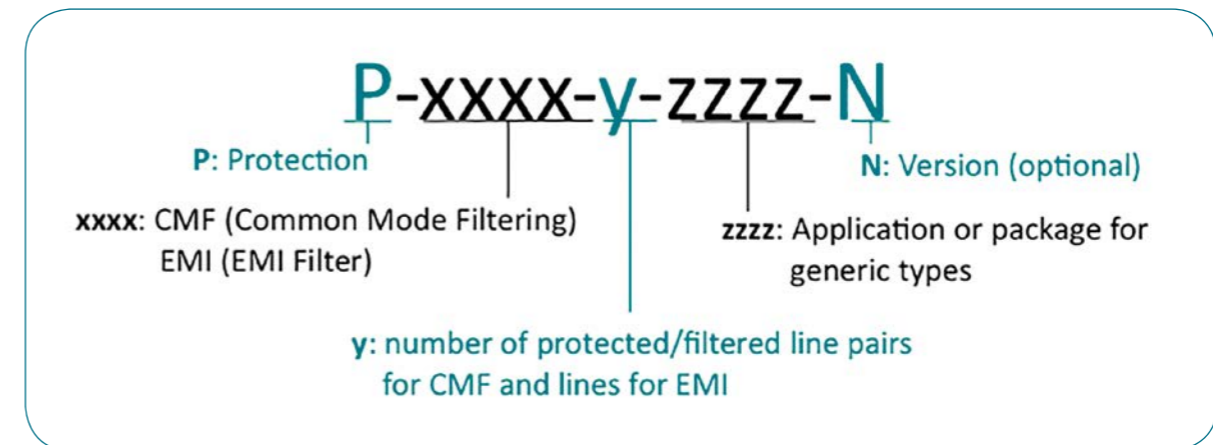

ESD protection, TVS, filtering and signal conditioning

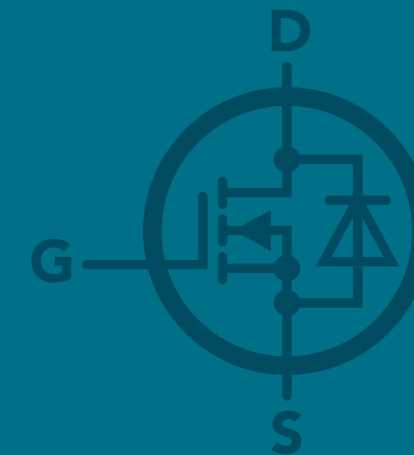

MOSFETs

Small-signal MOSFETs 75

Small-signal MOSFETs in ultra-small DFN1006 and DFN1006B packages	78
Small-signal MOSFETs in DFN1010D-3 single and DFN1010B-3 dual package	79
Small-signal MOSFETs in DFN2020MD-6 single and DFN2020-6 dual packages	81
Small-signal MOSFETs in WLCSP4 and WLCSP6 packages	82
Automotive-compliant small-signal MOSFETs	84
Small-signal MOSFETs single (N-channel)	86
Small-signal MOSFETs single (P-channel)	88
Small-signal MOSFET – Schottky combination	88
Small-signal MOSFETs dual	90
Small-signal MOSFETs complementary	90

Power MOSFETs 92

Power MOSFETs 20 - 25 V	101
Power MOSFETs 30 V	102
Power MOSFETs 40 V	104
Power MOSFETs 55 - 60 V	105
Power MOSFETs 75 - 80 V	106
Power MOSFETs 100 V	107
Power MOSFETs 105 - 150 V	108
P channel	108
Multi-chip	108
Power MOSFETs 200 V	109

Automotive MOSFETs 110

Automotive-compliant small-signal MOSFETs	116
30 V N-channel automotive TrenchMOS	118
40 V N-channel automotive TrenchMOS	119
55 - 60 V N-channel automotive TrenchMOS	121
75 - 80 V N-channel automotive TrenchMOS	124
100 V N-channel automotive TrenchMOS	125
TrenchPLUS MOSFETs	128

Small-signal MOSFET portfolio

What you get when you choose NXP for small-signal MOSFETs

A comprehensive portfolio for all applications


Best in class performing transistors from commodity to low R_{DSon} MOSFETs

A broad range of packages


Many options for WLCSP, leaded SMD and ultra-small leadless packages.

A quality product from an experienced, high volume supplier


- ▶ NXP is strongly committed to automotive quality standards
- ▶ NXP has a track record of more than 60 years in developing and producing discretes
- ▶ NXP is the #1 in small-signal discretes with a high production capacity

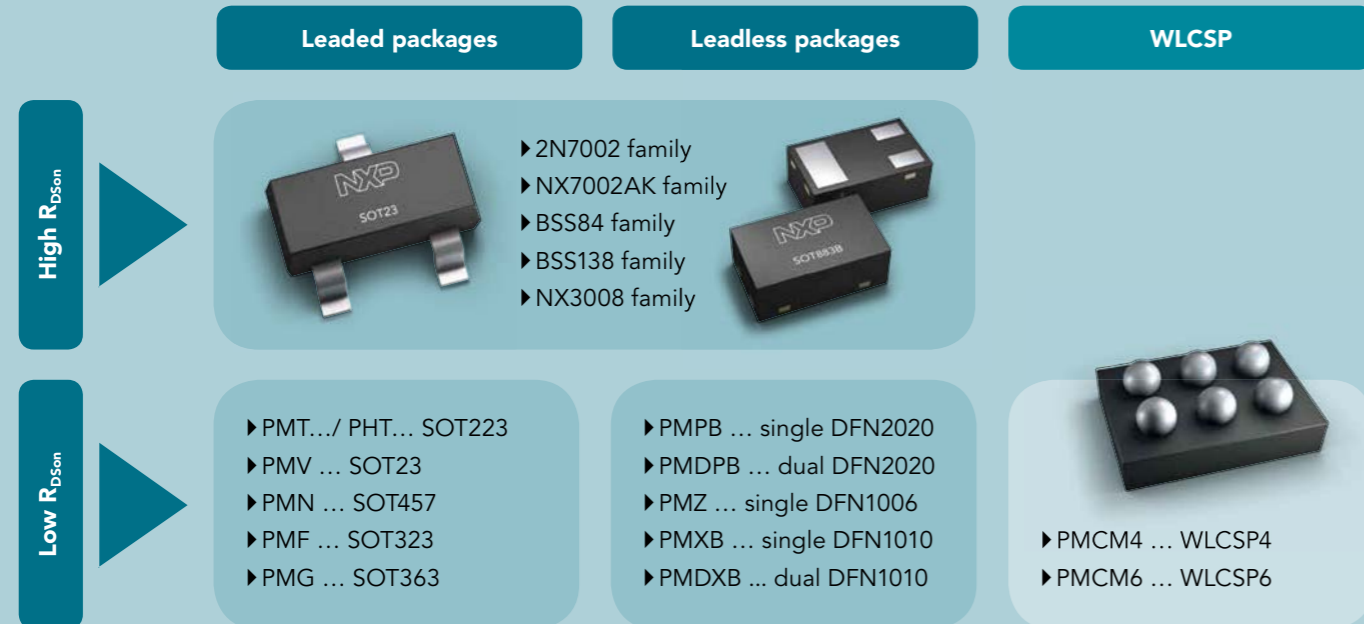

Block diagram for typical MOSFET application

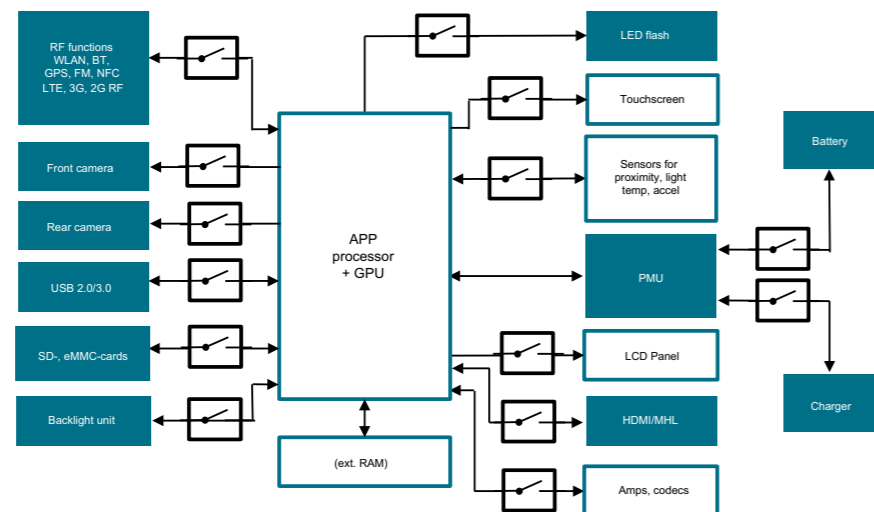


Leadless DFN packages replace leaded packages

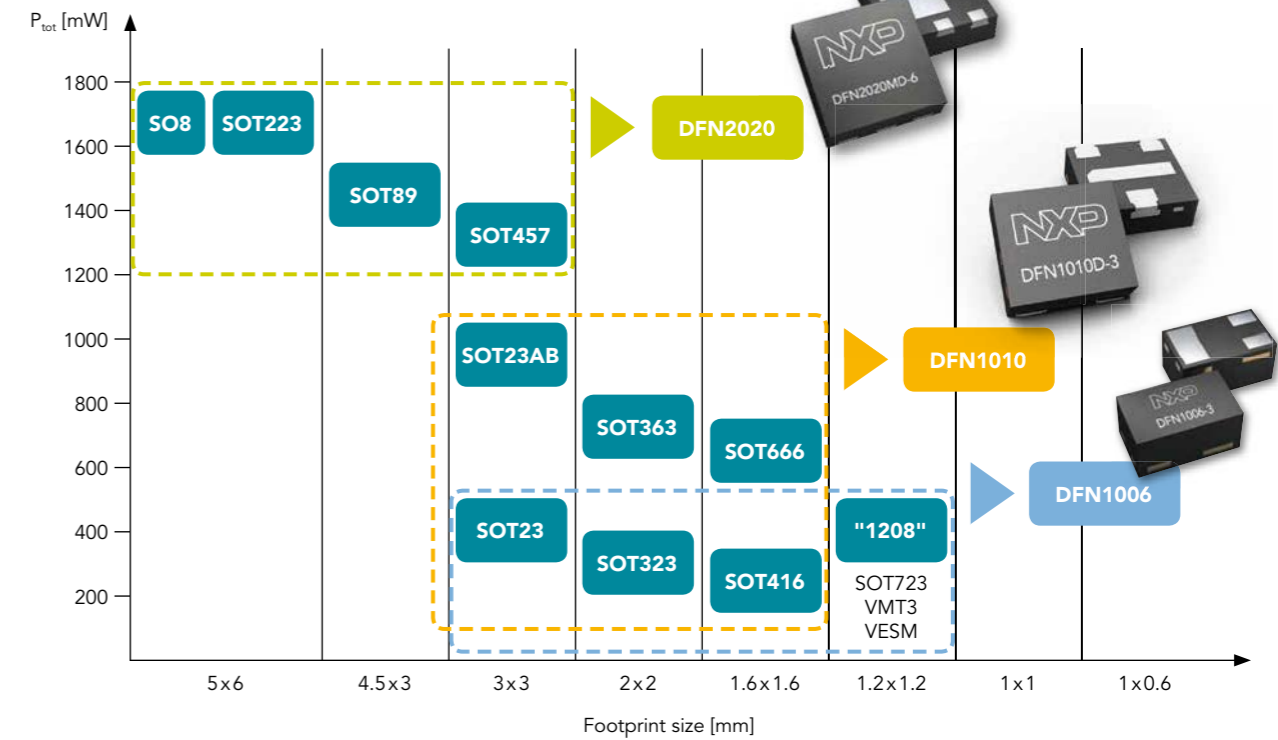

Leadless packages provide the same power capability compared to larger packages on a smaller size or provide a better thermal performance on the same footprint size. For that reason they replace established leaded packages in many applications.

Leadless DFN and WLCSP packages – dedicated solutions for your application

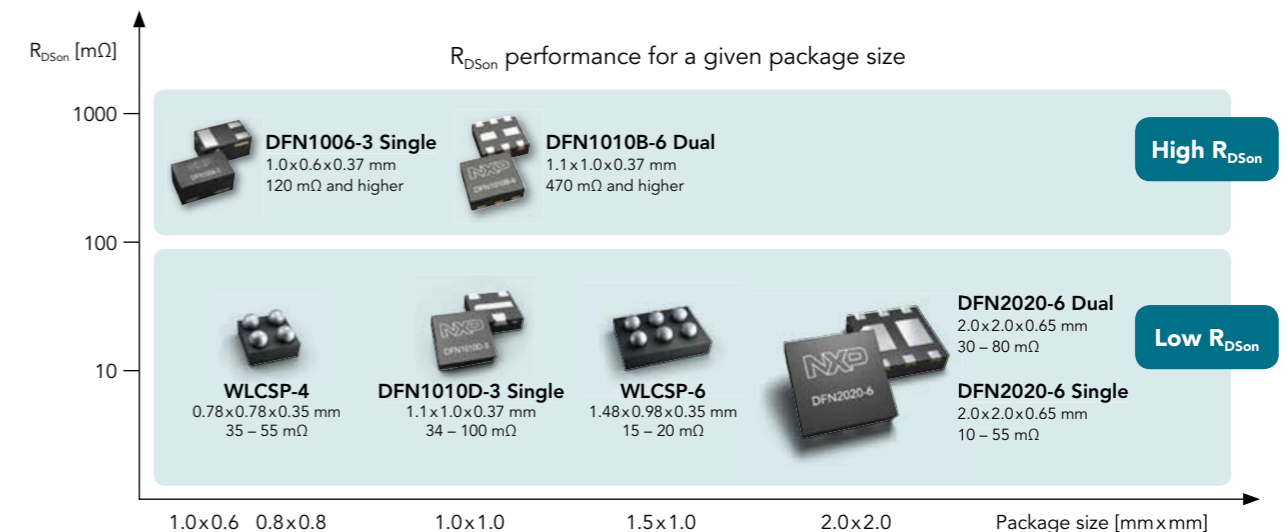

Small-signal MOSFETs in ultra-small DFN1006 and DFN1006B packages

types in **bold** represent new products

Package											DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)					
Size (mm)											1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37					
P _{tot} (mW)											250	250					
Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =						ESD protection (kV)	
										10 V	4.5 V	2.5 V	1.8 V	1.5 V	1.2 V		
N-channel	20	8	1.9	0.45	0.95	5.3	16	1.6	2	-	120	160	210	270	-	PMZ130UNE	
			1.6	0.45	0.95	5.3	16	1.6	2	-	170	200	240	300	-		PMZB150UNE
			1	0.5	0.95	6	86	0.45	2	-	270	360	470	600	-	PMZ290UNE2	PMZB290UNE2
			0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845	1125	2210	PMZ600UNE	PMZB600UNE
			1.5	0.45	0.95	5	17	1.6	2	-	210	240	270	300	-	PMZ200UNE	PMZB200UNE
	30	8	1	0.45	0.95	4	12	0.8	2	-	390	460	30	610	-	PMZ390UNE	PMZB390UNE
			0.59	0.45	0.95	4	12	0.6	2	-	550	660	770	890	-	PMZ550UNE	PMZB550UNE
			0.45	1.1	2.1	5	12	0.5	2	1000	1300	-	-	-	-	2N700BKM	2N7002BKMB
	60	20	0.35	1.1	2.1	4.7	6.9	1	2	2200	2500	-	-	-	-	NX7002BKM	NX7002BKMB
			1.4	0.45	0.95	4	26	1.3	1.8	-	330	420	520	-	-	PMZ350UPE	PMZB350UPE
P-channel	20	8	0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500	PMZ950UPE	PMZB950UPE
			1	0.45	0.95	2.9	22	1.45	2	-	430	470	750	950	-	PMZ320UPE	PMZB320UPE
	30	8	0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100	3000	-	PMZ1200UNE	PMZB1200UPE
			0.23	1.1	2.1	13	48	0.26	1	4500	5700	-	-	-	-	BSS84AKM	BSS84AKMB

Key features

- ▶ N- and P-channel
- ▶ Low R_{DS(on)} down to 120 mΩ
- ▶ I_D up to 1.9 A
- ▶ Low voltage drive (V_{GS(th)} = 0.65 V typ)
- ▶ Voltage range of 20 to 60 V
- ▶ ESD protection of up to 2 kV


Package

- ▶ 1.0 x 0.6 mm footprint
- ▶ Single package with different heights:
 - 0.5 mm for DFN1006 (SOT883)
 - 0.37 mm for DFN1006B (SOT883B)
- ▶ Power dissipation (P_{tot}) of 360 mW

Key applications

- ▶ Smartphones
- ▶ Wearables
- ▶ Tablets

DFN1006 – The ideal replacement for SOT416

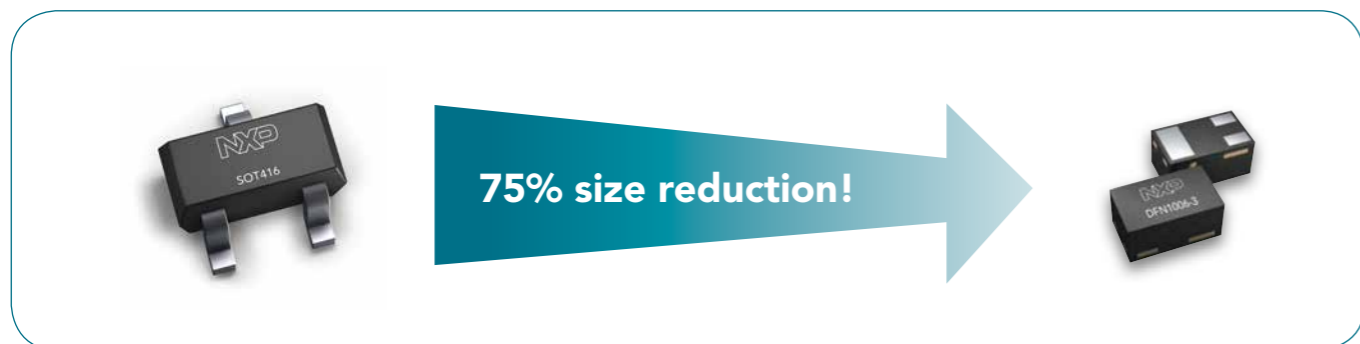

Small-signal MOSFETs in DFN1010D-3 single and DFN1010B-3 dual packages

types in **bold** represent new products

Package											DFN1010D-3 (SOT1215)	DFN1010B-6 (SOT1216)						
Size (mm)											1.1 x 1.0 x 0.37	1.1 x 1.0 x 0.37						
P _{tot} (mW)											1000	350						
Configuration	Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =						ESD protection (kV)	
											10 V	4.5 V	2.5 V	1.8 V	1.5 V	1.2 V		
Single	N-channel	12	8	3.2	0.4	0.9	6	18	6.6	1	-	34	39	46	50	121	PMXB40UNE	
		20	8	3.2	0.5	0.9	6	17	5.7	1	-	42	48	56	64	-	PMXB43UNE	
		30	20	3.2	1	2	3	11	3.6	-	49	56	-	-	-	-	PMXB56EN	
				3.2	1	2.5	3	11	6	1	44	56	-	-	-	-	PMXB65ENE	
		80	20	1.1	1.3	2.7	2	9	3	2	345	390	-	-	-	-	PMXB60ENEA	
	P-channel	12	8	3.2	0.4	1	6.2	27	6.7	1.5	-	59	78	120	198	880	PMXB65UPE	
		20	8	2.9	0.4	1	6	29	6.8	1	-	69	86	130	205	950	PMXB75UPE	
				1.2	0.45	0.95	3	18	1.25	1.5	-	350	450	600	760	1200	PMXB350UPE	
		30	20	2.4	1	2.5	4	16	6.2	1	100	125	-	-	-	-	PMXB120EPE	
		Dual	N-ch	20	8	0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845	1125	2210
30	8			0.59	0.45	0.95	4	12	0.6	2	-	550	660	770	890	-		PMDXB550UNE
60	20			0.26	1.1	2.1	4.7	6.9	1	2	2200	2500	-	-	-	-		NX7002BKXB
P-ch	20		8	0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500		PMDXB950UPE
	30		8	0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100	3000	-		PMDXB1200UPE
Complementary	N	20	8	0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845	1125	2210		
	P	20	8	0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500		PMCB900UE
	N	30	8	0.59	0.45	0.95	4	12	0.6	2	-	550	660	770	890	-		
	P	30	8	0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100	3000	-		PMCB1000UE


Key features

- ▶ N- and P-channel
- ▶ Low R_{DS(on)} to 34 mΩ
- ▶ I_D to 3.2 A
- ▶ Low voltage drive (V_{GS(th)} = 0.65 V typ)
- ▶ Voltage range of 12 to 80 V
- ▶ ESD protection to more than 1 kV

Package

- ▶ 1.1 x 1.0 x 0.37 mm package size
- ▶ Single and dual packages
- ▶ High power dissipation (P_{tot}) of 1000 mW single and 350 mW for dual package
- ▶ Single package with tin-plated, solderable side pads for improved mounting and automotive conformity

DFN1010B-6 dual – The ideal replacement for SOT363

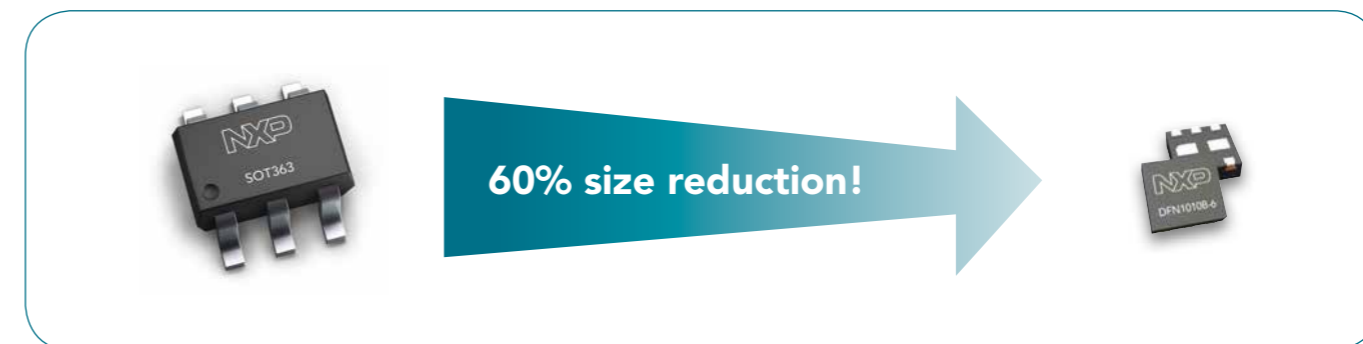

DFN2020 – The low R_{DSon} choice for values $> 10\text{ m}\Omega$

In the spotlight

PMPB15XP – Low R_{DSon} P-channel MOSFET in DFN2020

12 V P-channel with R_{DSon} of 15 m Ω @ $V_{GS} = 4.5\text{ V}$ (typ)

I_D max of 11.8 A for medium current load switch

Small and leadless ultrathin SMD plastic package: 2.0 x 2.0 x 0.65 mm

Exposed drain pad for excellent thermal conduction

R_{DSon} specified to 1.8 V for low drive voltages



DFN2020MD-6 (SOT1220)

Single package
2 x 2 x 0.65 mm


Key features

- ▶ N- and P-channel
- ▶ Low R_{DSon} down to 10 m Ω
- ▶ I_D up to 13 A
- ▶ Low voltage drive ($V_{GS(th)} = 0.65\text{ V}$ typ)
- ▶ Voltage range of 12 to 100 V
- ▶ ESD protection of 3 kV

Package

- ▶ 2.0 x 2.0 x 0.65 mm package size
- ▶ Single and dual packages
- ▶ High power dissipation (P_{tot}) of 1250 mW for single and dual packages
- ▶ Single package with tin-plated, solderable side pads for improved mounting and automotive conformity

Generic charging path application

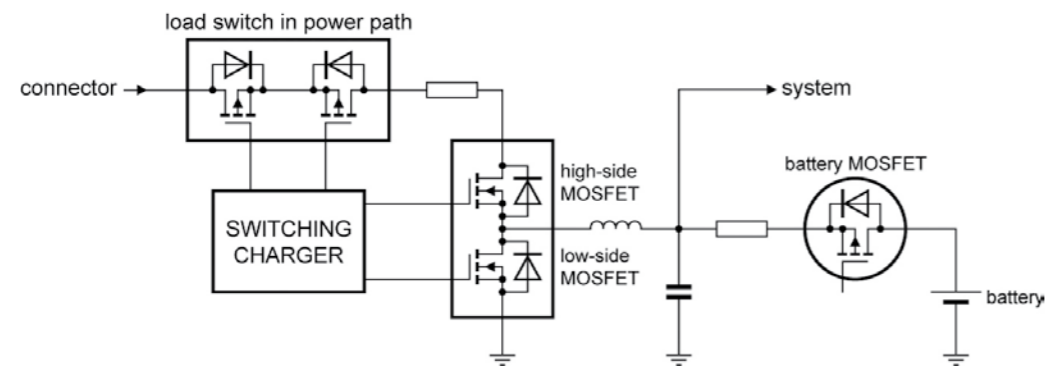

Products for charging path application

Type	Package	V_{DS}/V_{GS} (V)	I_D (A)	ESD protection (kV)	R_{DSon} typ (m Ω) @ $V_{GS} =$				Application
					10 V	4.5 V	2.5 V	1.8 V	
PMPB15XP	DFN2020MD-6	12 / 12	11.8	1.5	-	15	17	21	Charger Switch, Battery FET
PMPB20EN	DFN2020MD-6	30 / 20	10.4	-	16.5	20.5	-	-	Buck Converter
PMPB10XNE	DFN2020MD-6	20 / 18	12.9	2.2	-	10	12	16	Battery Pack

Small-signal MOSFETs

Small-signal MOSFETs in DFN2020MD-6 single and DFN2020-6 dual packages

types in **bold** represent new products

Package		DFN2020MD-6 (SOT1220)		DFN2020-6 (SOT1118)													
Size (mm)		2.0 x 2.0 x 0.65		2.0 x 2.0 x 0.65													
P_{tot} (mW)		1250		1250													
Configuration	Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_g typ (nC)	ESD protection (kV)	R_{DSon} typ (m Ω) @ $V_{GS} =$						
											10 V	4.5 V	2.5 V	1.8 V			
Single	N-channel	20	12	8	11.3	0.4	1	9	26	8.8	2	-	14	17	21	PMPB12UNE	
				12.9	0.4	0.9	13	54	23	2.2	-	10	12	16	PMPB10XNE		
				5.9	0.75	1.25	16	49	31	2	-	14	20	-	PMPB20XNEA		
				10.4	0.4	0.9	9	31	13.4	-	-	18	21	23	PMPB15XN		
				10.1	0.4	0.9	9	31	11.6	2.1	-	19	23	31	PMPB23XNE		
		30	12	11.3	0.4	0.9	12	54	24	2.2	-	13	14	17	PMPB13XNE		
				5	0.4	0.9	8	33	12.4	2.1	-	28	32	37	PMPB29XNE		
			5.5	0.45	1.2	6	21	5.1	-	-	37	55	-	PMPB33XN			
			20	13	1	2	9	17	13.7	-	-	12	14	-	PMPB11EN		
				10.4	1	2	9	9	7.2	-	-	16.5	20.5	-	PMPB20EN		
	60	20	4	1.3	2.7	4.5	13.5	7.5	1	42	48	-	-	PMPB55ENEAE			
			3	1.3	2.7	4	10.5	6.2	2.7	72	85	-	-	PMPB85ENEAE			
		80	2.8	1.3	2.7	5	15	9.9	2.8	80	92	-	-	PMPB95ENEAE			
			1.9	1.3	2.7	3.5	9.5	4.8	2	175	195	-	-	PMPB215ENEAE			
	P-channel	12	12	11.8	0.47	0.9	18	85	67	-	-	15	17	21	PMPB15XP		
				10.3	0.47	0.9	16	43	28.8	-	-	19	21	27	PMPB19XP		
				10.3	0.47	0.9	13	92	30	2.4	-	19	22	28	PMPB20XPE		
				5	0.47	0.9	12	91	30	2.3	-	28	31	36	PMPB29XPE		
				7.9	0.47	0.9	12	62	15	-	-	30	35	45	PMPB33XP		
		30	12	5	0.47	0.9	15	28	14	-	-	47	54	74	PMPB47XP		
8.8				1	2.5	10	28	30	-	-	24	32	-	PMPB27EP			
20			6.8	1	2.5	7.4	27	17	-	-	40	55	-	PMPB48EP			
			5	0.47	0.9	9	57	15.6	2.3	-	39	45	56	PMPB43XPE			
			5	0.47	0.9	9	57	15.6	2.3	-	39	45	56	PMPB43XPE			
Dual	N-ch	20	12	5.3	0.4	0.9	4	40	14.4	-	-	32	40	60	PMDPB30XN		
				3.1	0.75	1.25	9	19	2.9	2	-	55	72	-	PMDPB56XNEA		
	30	12	3.1	0.5	1.5	6	18	1.65	1.8	-	95	130	-	PMDPB95XNE2			
			4.5	0.45	0.95	7	41	6.3	2	-	58	74	97	PMDPB58UPE			
	P-channel	20	8	3.7	0.45	0.95	6	47	5.4	2	-	82	107	142	PMDPB85UPE		
				4.5	0.47	0.9	4	135	16.5	-	-	55	75	110	PMDPB55XP		
		12	4.2	0.75	1.25	7	33	5	2	-	66	98		PMDPB70XPE			
			3.7	0.4	1	6	120	5.7	-	-	80	95	120	PMDPB80XP			
		30	12	3.8	0.45	1	3	112	5.2	-	-	70	89	-	PMDPB70XP		
				3.7	0.4	1	6	120	5.7	-	-	80	95	120	PMF8032XP		
MOSFET-Schottky	P	20	12	3.7	0.4	1	6	120	5.7	-	-	80	95	120	PMF8040XP		
Pre-biased NPN	P	30	12	3.4	0.45	1	3	112	5.2	-	-	85	105	-	PMC85XP		
Complementary	N	20	12	5.3	0.4	0.9	4	40	14.4	-	-	26	33	50			
	P	20	12	4.5	0.4	0.9	4	40	8.1	-	-	55	75	110		PMCPB5530X	

MOSFETs

Small-signal MOSFETs in WLCSP4 and WLCSP6 packages

Key features

- ▶ N- and P-channel
- ▶ Low R_{DSon} down to 15 mΩ
- ▶ I_D up to 9.6 A
- ▶ Low voltage drive ($V_{GSth} = 0.6$ V typ)
- ▶ V_{DS} voltage of 12V
- ▶ ESD protection of 2 kV

Package

- ▶ Two package outlines
 - WLCSP4: 0.78x0.78 mm package size
 - WLCSP6: 1.48x0.98 mm package size
- ▶ Ultra-low height of 0.35 mm
- ▶ High power dissipation (P_{tot}) of 1300 mW

WLCSP6

Single package
1.48 x 0.98 x 0.35 mm



In the spotlight

PMCM6501VPE- Ultra-low R_{DSon} P-ch MOSFET in WLCSP6

12 V P-ch with R_{DSon} of typ. 19 mΩ @ $V_{GS} = 4.5$ V

I_D max of 8.2 A for high current load switch

Ultra-small footprint: 1.48 x 0.98 x 0.35 mm

Low voltage gate drive with V_{GSth} typ. 0.6V

R_{DSon} specified down to 1.8 V for low drive voltages

Small-signal MOSFETs for automotive



DFN2020MD-6 (SOT1220)

Single package
2 x 2 x 0.65 mm

- ▶ Broad portfolio of standard leaded packages in SOT23 and SOT457 and innovative leadless DFN packages with solderable side pads
- ▶ Low R_{DSon} MOSFETs with R_{DSon} down to 14 mΩ
- ▶ Standard high R_{DSon} MOSFETs in different packages with 2 kV ESD protection
- ▶ Broad portfolio of 60 V low R_{DSon} MOSFETs

In the spotlight

PMPB85ENEA - Automotive-compliant 60 V N-channel MOSFET with I_D max of 4.4 A in DFN2020MD-6 (SOT1220)

60 V N-channel with R_{DSon} of typ. 72mΩ @ $V_{GS} = 10$ V

Small and leadless ultrathin SMD plastic package: 2.0 x 2.0 x 0.65 mm


Exposed drain pad for excellent thermal conduction

ESD protection to 2 kV HBM

AEC-Q101 qualified

types in **bold** represent new products


Package											WLCSP4	WLCSP6			
Size (mm)											0.78 x 0.78 x 0.35	1.48 x 0.98 x 0.35			
P_{tot} (mW)											1300	1300			
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)min}$ (V)	$V_{GS(th)max}$ (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protection (kV)	R_{DSon} typ (mΩ) @ $V_{GS} =$					
										4.5 V	2.5 V	1.8 V	1.5 V		
N	12	8	5	0.4	0.9	6.3	27	5.5	2	57	66	77	90	PMCM440VNE	
			6	0.4	0.9	6.3	30	6	2	36	46	60	86	PMCM4401VNE	
			8.4	0.4	0.9	11	80	15.4	2	21	24	28	33		PMCM650VNE
			9.6	0.4	0.9	10.8	97.5	16.1	2	15	18	22	30		PMCM6501VNE
P	12	8	4.9	0.4	0.9	4.8	25.1	6.8	2	55	77	110	-	PMCM4401VPE	
			8.2	0.4	0.9	8	72	19.6	2	19	25	37	-		PMCM6501VPE

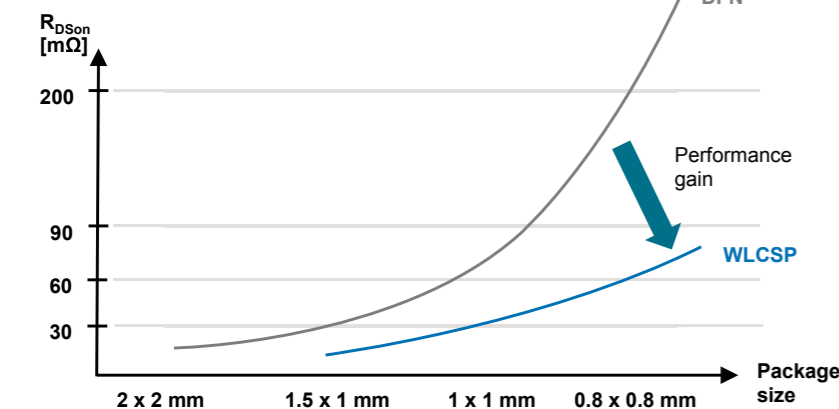

MOSFETs in WLCSP


- ▶ Improved R_{DSon} performance compared to DFN packages
- ▶ Smallest footprint
- ▶ High power capability of 1300 mW
- ▶ Ideal for mobile and space-constrained applications

DFN1010 and DFN2020 with solderable side pads

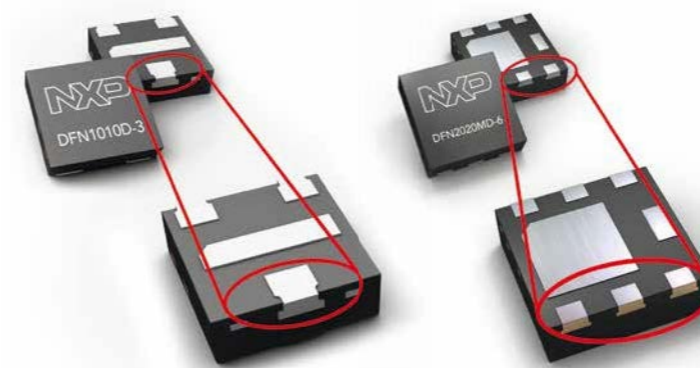

Tin plated solderable side pads enable automatic optical inspection (AOI)

Reference design for LED lighting

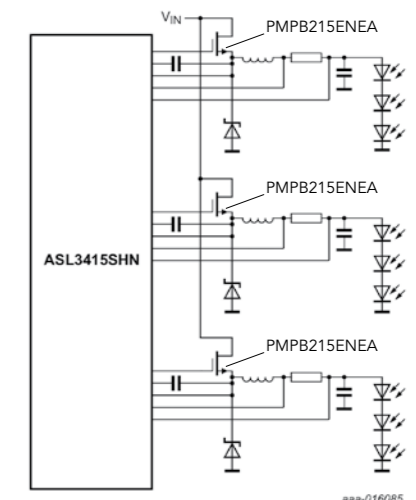





Small-signal MOSFETs single (N-channel)

types in **bold** represent new products

Package													SOT223	SOT457 (SC-74)	SOT23	SOT323 (SC-70)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	
Size (mm)													6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	
P _{tot} (mW)													1700	600	250	200	250	250	
V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th) min} (V)	V _{GS(th) max} (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =										
									10 V	4.5 V	2.5 V	1.8 V							
20	8	4.7	0.45	1	8.2	39.5	6.2	2	-	24	29	40			PMN28UNEA	PMV28UNEA			
		1.9	0.4	1	8	31	2.2	2	-	63	77	114				PMF63UNE			
		2.2	0.4	1	6	21	2.6	2	-	64	78	110				PMV65UNE			
		1.9	0.45	0.95	5.3	16	1.6	2	-	120	155	195					PMZ130UNE		
		1.6	0.45	0.95	5.3	16	1.6	2	-	155	190	235						PMZB150UNE	
		1	0.5	0.95	6	86	0.45	2	-	270	360	470						PMZ290UNE2	PMZB290UNE2
	0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845					PMZ600UNE	PMZB600UNE		
	12	6.3	0.75	1.25	16	44	9.9	2	-	16	24	-				PMV20XNEA			
		8.6	0.47	0.9	7	135	7.7	-	-	15	18	22				PMV16XN			
		9.1	0.4	0.9	9	31	12	1	-	15	19	22			PMN16XNE				
5.4		0.4	0.9	7	35	6.2	-	-	24	30	40				PMV30UN2				
30	8	1.5	0.45	0.95	5	17	1.6	2	-	210	240	270						PMZ200UNE	PMZB200UNE
		1	0.45	0.95	4	12	0.8	2	-	390	460	530						PMZ390UNE	PMZB390UNE
		0.59	0.45	0.95	4	12	0.6	2	-	550	660	770						PMZ550UNE	PMZB550UNE
	12	0.4	0.6	1.1	26	88	0.52	2	-	1000	1400	2000				NX3008NBK	NX3008NBKW		
		7.2	0.4	0.9	8	33	12.4	2	-	19	22	17				PMV20XNE			
		5.7	0.4	0.9	9	34	7	-	-	33	42	54			PMN30UN				
		4.4	0.4	0.9	9	34	7	-	-	36	43	56				PMV40UN2			
	20	0.9	0.5	1.5	8	11	0.74	2	-	234	324	-					PMF250XNE		
		7.6	1	2	9	9	7.2	-	17	21	-	-				PMV20EN			
		5.5	1	2.5	8	33	12.6	2	17	22	-	-			PMN25ENEA	PMV25ENEA			
3.9		1	2.5	6.3	14.1	6	2	30	39	-	-				PMV50ENEA				
3.1		1	2.5	18	78	6.5	-	28	37	-	-				PMV37EN2				
4.5		1	2.5	3	11	6	1	30	44	-	-			PMN40ENE					
5.1		1	2	3	11	3.6	-	35	43	-	-				PMV45EN2				
40	20	2.1	1	2.5	3	15	2.6	2	70	90	-	-				PMV90ENE			
		0.18	0.8	1.5	10	51	0.34	-	2700	3000	4000	-				NX3020NAK	NX3020NAKW		
55	10	3.1	1	2.5	-	-	-	1	65	88	-	-				PMV65ENEA			
		2.5	1	2.5	14	14	2.4	1	95	120	-	-				PMV130ENEA			
60	20	0.3	0.4	1.3	4	11	1	3	-	2300	2400	3100				B5H11BK			
		3.1	1.3	2.7	9	33	12.7	2	46	52	-	-			PMN55ENEA	PMV55ENEA			
		2.1	1.3	2.7	6.4	15.9	5.9	2	96	108	-	-			PMN120ENEA	PMV120ENEA			
		1.5	1.3	2.7	6.3	13	3.9	2	176	196	-	-			PMN230ENEA	PMV230ENEA			
		0.8	1.3	2.7	5.3	10.2	2.4	2	300	332	-	-				PMV450ENEA			
		0.19	0.8	1.5	6	11	0.33	yes	2800	3500	4500	-	-				NX138AK	NX138AKW	
		0.27	0.5	1.5	7.9	12.5	0.49	2	2100	2200	2600	-	-				NX138BK	NX138BKW	
		0.1	0.6	1.4	2	5	-	2	2800	3800	-	-				BSN20BK			
		0.19	1.1	2.1	12	34	0.33	yes	3000	3700	-	-				NX7002AK	NX7002AKW		
100	20	0.27	1.1	2.1	4.7	6.9	1	2	2200	2500	-	-				NX7002BK	NX7002BKW	NX7002BKM	NX7002BKMB
		1.5	1.3	2.7	4.8	9.3	4.5	1	285	300	-	-			PMT280ENEA				
		1.1	1.3	2.7	5.7	10.2	2.9	1	527	555	-	-			PMT560ENEA				





Small-signal MOSFETs dual

types in **bold** represent new products

											SOT363 (SC-88)	SOT666	DFN2020-6 (SOT1118)	DFN1010B-6 (SOT1216)					
Package																			
Size (mm)											2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.65	1.0 x 1.0 x 0.37					
P _{tot} (mW)											300	300	1250	350					
Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)		R _{DSon} typ (mΩ) @ V _{GS} =								
											10 V	4.5 V	2.5 V	1.8 V					
N-channel	20	8	0.8	0.5	0.95	10	117	0.45	2		-	290	420	600		PMDT290UNE			
			0.6	0.45	0.95	5.6	19	0.4	1		-	470	620	845				PMDXB600UNE	
	30	8	5.3	0.4	0.9	4	40	14.4	-		-	32	40	60			PMDPB30XN		
			0.59	0.45	0.95	4	12	0.6	2		-	550	660	770				PMDXB550UNE	
	60	20	8	0.35	0.6	1.1	26	88	0.52	2		-	1000	1400	2000	NX3008NBKS	NX3008NBKV		
				3.1	0.75	1.25	9	19	2.9	2		-	55	72	-				PMDPB56XNEA
			12	3.1	0.5	1.5	6	18	1.65	1.8		-	95	130	-				PMDPB95XNE2
				1	0.5	1.5	6.5	14	0.7	2		-	170	240	-	PMGD175XNE			
			20	0.18	0.8	1.5	10	51	0.34	yes		2700	3000	4000	-	NX3020NAKS	NX3020NAKV		
				0.18	0.8	1.5	6	11	0.33	yes		2800	3500	4500	-	NX138AKS			
	P-channel	20	8	0.26	0.5	1.5	7.9	12.5	0.49	2		2100	2200	2600	-	NX138BKS			
				0.17	1.1	2.1	12	34	0.33	yes		3000	3700	-	-	NX7002AKS			
0.26				1.1	2.1	4.7	6.9	1	2		2200	2500	-	-	NX7002BKS			NX7002BKXB	
0.55				0.5	1.3	48	152	0.76	2		-	670	1200	1800			PMDT670UPE		
4.5				0.45	0.95	7	41	6.3	2		-	58	74	97				PMDPB58UPE	
0.5				0.45	0.95	2.3	13.5	1.19	1		-	1020	1270	1700				PMDXB950UPE	
30		12	3.7	0.45	0.95	6	47	5.4	2		-	82	107	142				PMDPB85UPE	
			4.5	0.47	0.9	4	135	16.5	-		-	55	75	110				PMDPB55XP	
			4.2	0.75	1	7	33	5	2		-	66	98	-				PMDPB70XPE	
			3.7	0.4	1	6	120	5.7	-		-	80	95	120				PMDPB80XP	
			0.41	0.45	0.95	3	14	0.7	2		-	1200	1700	2100				PMDXB1200UPE	
			0.2	0.6	1.1	49	103	0.55	2		-	2800	5300	-		NX3008PBKS	NX3008PBKV		
50	20	8	3.8	0.45	1	3	112	5.2	-		-	70	89	-				PMDPB70XP	
			0.16	1.1	2.1	24	73	0.26	1		4500	5700	-	-	BSS84AKS	BSS84AKV			

Small-signal MOSFETs complementary


types in **bold** represent new products

Package	Type	Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)		t _{on} typ (ns)	t _{off} typ (ns)	Q _G typ (nC)	ESD protection (kV)	R _{DSon} typ (mΩ) @ V _{GS} =					
													10 V	4.5 V	2.5 V	1.8 V	1.5 V	1.2 V
 SOT666 (1.6 x 1.2 x 0.55)	NX1029X	N	60	20	0.33	1.1	2.1		11	19	0.5	2	1000	1300	-	-	-	-
		P	50	20	0.17	1.1	2.1		24	73	0.26	1	4500	5100	-	-	-	-
	NX3008CBKV	N	30	8	0.4	0.6	1.1		26	88	0.52	2	-	1000	1400	2000	-	-
		P	30	8	0.22	0.6	1.1		49	103	0.55	2	-	2800	5300	-	-	-
PMDT290UCE	N	20	8	0.8	0.5	0.95		10	117	0.45	2	-	290	420	600	-	-	
	P	20	8	0.55	0.5	1.3		48	152	0.76	2	-	670	1200	1800	-	-	
 SOT363 (SC-88) (2.0 x 1.25 x 0.95)	NX3008CBKS	N	30	8	0.35	0.6	1.1		26	88	0.52	2	-	1000	1400	2000	-	-
		P	30	8	0.2	0.6	1.1		49	103	0.55	2	-	2800	5300	-	-	-
 DFN1010B-6 (1.1 x 1.0 x 0.37)	PMCXB900UE	N	20	8	0.6	0.45	0.95		5.6	19	0.4	1	-	470	620	845	1125	2210
		P	20	8	0.5	0.45	0.95		2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500
	PMCXB1000UE	N	30	8	0.59	0.45	0.95		4	12	0.6	2	-	550	660	770	890	-
		P	30	8	0.41	0.45	0.95		3	14	0.7	2	-	1200	1700	2100	3000	-
 DFN2020-6 (2.0 x 2.0 x 0.65)	PMCPB5530X	N	20	12	5.3	0.4	0.9		19	56	14.4	-	-	26	33	50	-	-
		P	20	12	4.5	0.47	0.9		18	56	16.5	-	-	55	75	110	-	-

4 steps select a power MOSFET

- 1 Select a voltage, e.g. 40 V
- 2 Select a package, e.g. LFPAK56
- 3 Choose an R_{DSon} from our extensive range
- 4 Select a type and visit www.nxp.com/mosfets to download datasheets and models, and order samples

PSMN part numbering

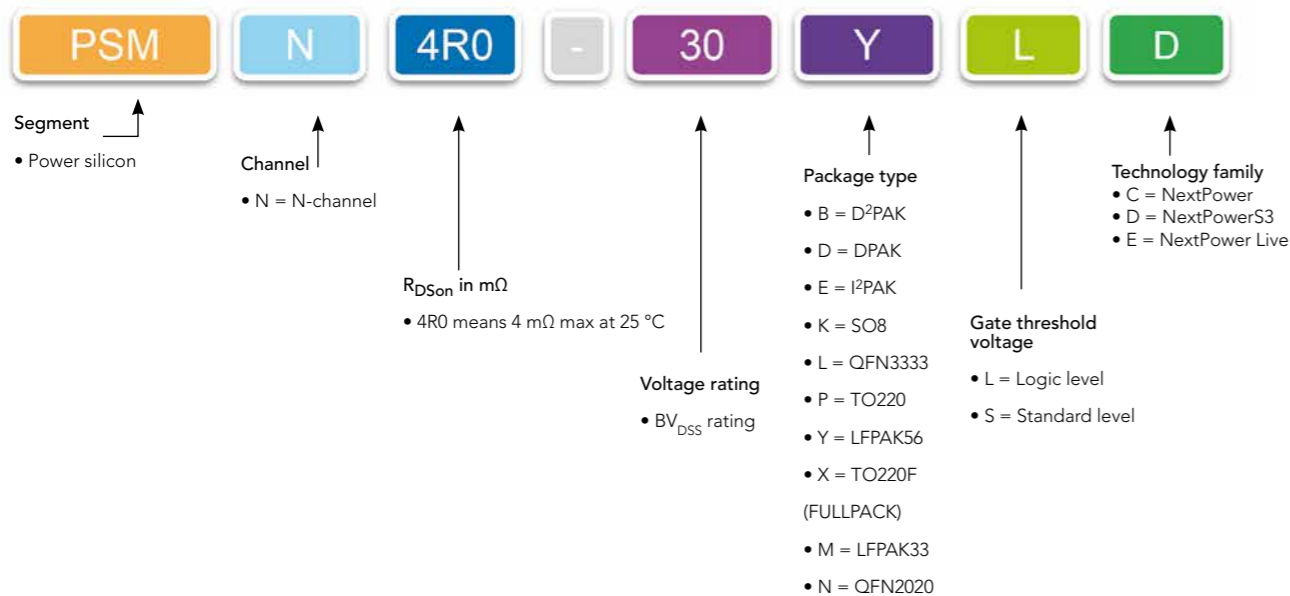

High-performance power MOSFETs

MOSFET package selection

Through-hole

Surface-mount

- TO220
- ▶ Industry standard
- ▶ Up to 150 A



- LFPAK56
- ▶ Power SO8
- ▶ Up to 100 A



- TO220F
- ▶ Industry standard
- ▶ Up to 75 A



- LFPAK33
- ▶ QFN/DFN3333 compatible
- ▶ Up to 70 A



- I²PAK
- ▶ Industry standard
- ▶ Up to 120 A




- D²PAK
- ▶ Industry standard
- ▶ Up to 120 A



Featured product: NextPowerS3

NextPowerS3 – perfectly balanced for DC/DC switching applications

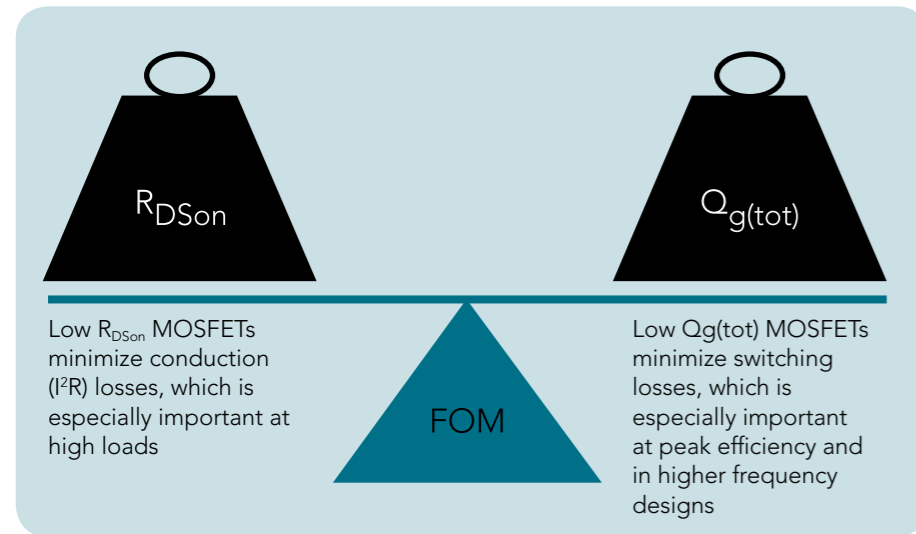

The challenge


Low $R_{DS(on)}$ MOSFETs typically need a big die.

Low $Q_{g(tot)}$ MOSFETs typically need a small die.


The challenge for manufacturers is to create optimized power MOSFETs that have both low $R_{DS(on)}$ and low $Q_{g(tot)}$.

Welcome to NextPowerS3.

The Figure of Merit (FOM) of a MOSFET is calculated as the product of the $R_{DS(on)}$ and $Q_{g(tot)}$. A low FOM indicates good MOSFET performance in switching applications.

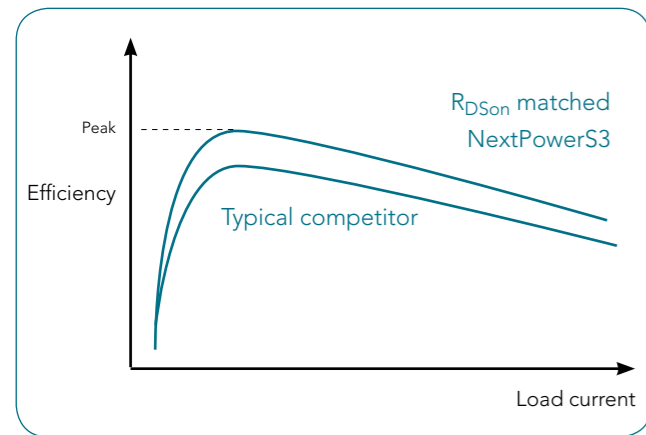

Comparing the performance of a NextPowerS3 MOSFET with a competitor of similar $R_{DS(on)}$ typically shows an efficiency performance advantage across the load range. Since conduction losses are the same for both devices, the advantage is more noticeable at lower loads where switching losses contribute proportionally more.

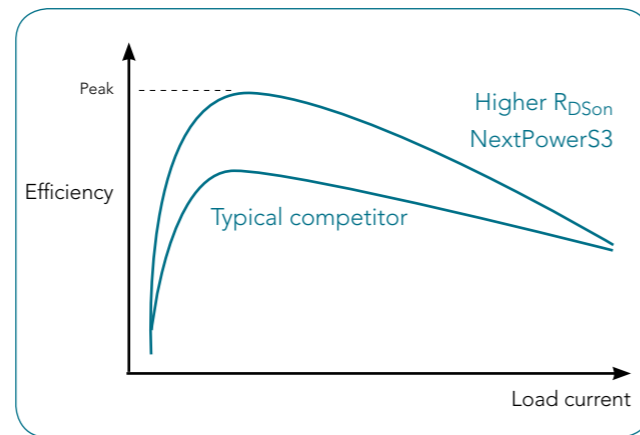

Using a NextPowerS3 MOSFET, with a higher $R_{DS(on)}$ than a competitor device, reduces the $Q_{g(tot)}$ still further, resulting in an improved peak efficiency. At higher loads, increased conduction losses cancel out the switching advantages and the two parts show similar performance.

Featured product: NextPowerS3


High switching frequencies



Increasing switching frequency from 300 KHz to 1 MHz allows a 70 - 80% reduction in inductor size. NextPowerS3's excellent switching performance enables such design choices with minimal loss of efficiency.


Low spiking

Typical competitor NextPowerS3

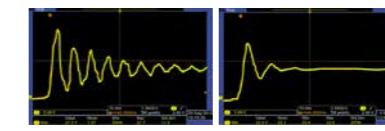


Thanks to optimised output capacitance, body diode and channel structure, NextPowerS3 MOSFETs exhibit "soft-recovery" switching behaviour, resulting in lower voltage spikes, faster decays and virtually no gate glitches.

Thermal efficiency




Packaged in the copper-clip based LFPACK package, NextPowerS3 features excellent thermal performance. As $R_{DS(on)}$ rises with temperature, keeping MOSFETs cool helps efficiency as well as reliability.

Low leakage

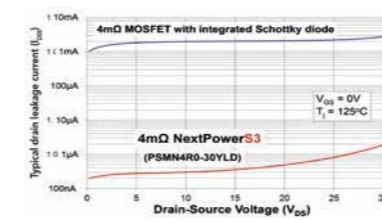


Unique SchottkyPlus technology offers the benefits of an integrated Schottky diode without the problems associated with leakage current.

Specialist high sides

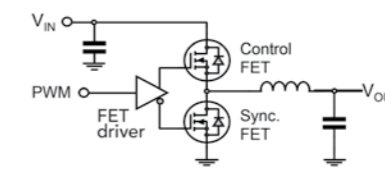

The NextPowerS3 portfolio contains devices with multiple busbars and low R_g optimized for use as control FETs, further improving system efficiencies.

Improved SOA

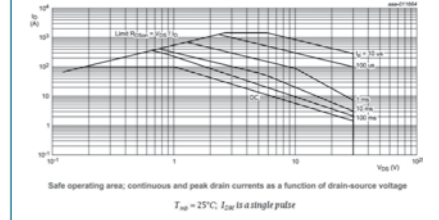


A wide cell pitch makes NextPowerS3 an excellent choice for hot-swap, e-Fuse, and power OR-ing applications.

Package	Type number	$V_{DS} [max] (V)$	$R_{DS(on)} [max] @ V_{GS} = 10 V (m\Omega)$	$R_{DS(on)} [max] @ V_{GS} = 4.5 V (m\Omega)$	$I_D [max] (A)$	$Q_{g(tot)} [typ] (nC)$
LFPACK33 (SOT1210)	PSMN2R4-30MLD	30	2.4	3.2	70	16
	PSMN4R2-30MLD	30	4.3	5.7	70	9.2
	PSMN7R5-30MLD	30	7.6	10.3	57	5.8
Power-SO (LFPACK56)	PSMN0R9-30YLD	30	0.87	1.09	100	51
	PSMN1R0-30YLD	30	1.02	1.3	100	38
	PSMN1R2-30YLD	30	1.24	1.6	100	32
	PSMN1R4-30YLD	30	1.42	1.85	100	27.6
	PSMN2R4-30YLD	30	2.4	3.1	100	18
	PSMN3R0-30YLD	30	3.1	4	100	14.5
	PSMN4R0-30YLD	30	4	5.5	95	9.6
	PSMN6R0-30YLD	30	6	8.35	66	6.7
	PSMN6R1-30YLD	30	6	8.35	66	6.8
	PSMN7R5-30YLD	30	7.5	10.2	51	5.8
	PSMN1R0-40YLD	40	1.1		100	54
PSMN1R4-40YLD	40	1.4		100	45	

Featured product: NextPowerS3 – the technology

NextPower Live! MOSFETs
for a non-stop world
 Reliable linear-mode performance
 AND low R_{DSon} efficiency
 in *hot-swap* and *soft-start* applications

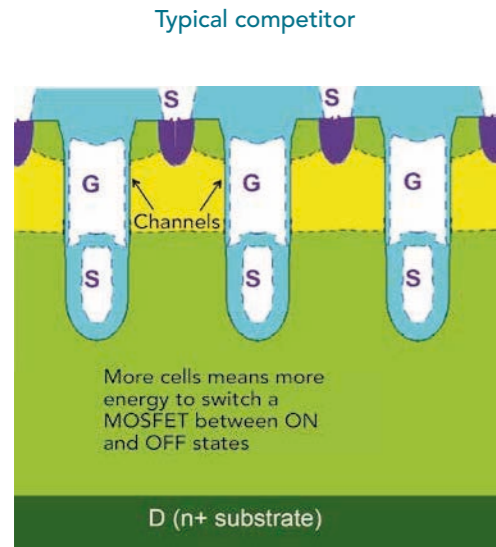

The importance of cell design

The outstanding performance of NextPowerS3 is largely attributable to NXP's unique "Super-junction" technology and optimization of cell structures.

Most manufacturers of low-voltage MOSFETs use "Split Gate" technology to achieve low R_{DSon} .

NextPowerS3 uses a different approach to its cell design.

The drive for R_{DSon}

A MOSFET's R_{DSon} is given by the formula:

$$R_{DSon} = R_{channel} + R_{drift} + R_{substrate} + (R_{package})$$

Many manufacturers focus on reducing $R_{channel}$ to drive R_{DSon} down.

NXP's Super-junction allows for an optimization of all three components for reduction in R_{DSon} , while also enhancing switching performance and Safe Operating Area (SOA).

Maximizing switching performance


Switching losses result from the energy required to charge / discharge all the cell capacitances across the device. The total charge required is referred to as $Q_{g(tot)}$.

With NextPower S3, $Q_{g(tot)}$ is lower and switching losses are kept to a minimum. This is especially beneficial at peak efficiency and in higher-frequency designs, which have a higher number of switching events.

SOA and other benefits

When a device is operating in its linear mode, the channel current generates localized heating effects, which can cause failure.

NXP has optimized the cell structure to keep this heating effect under control. As a result, NextPowerS3 enjoys a particularly strong SOA, which is important in hot-swap, e-Fuse, and power OR-ing designs.

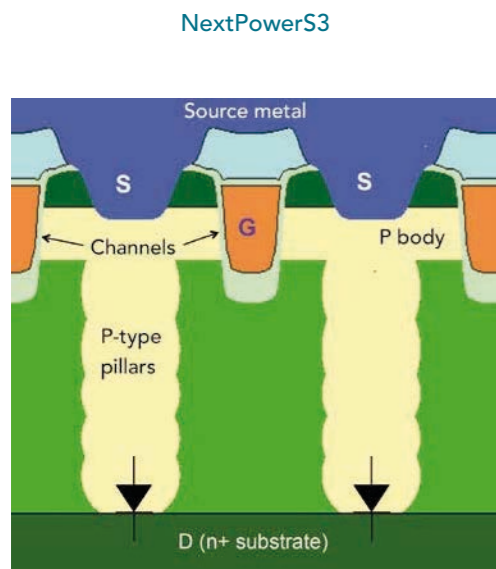

Reverse recovery and diode leakage in SMPS
www.nxp.com/quicklearning33



NextPowerS3 MOSFETs for DC/DC buck regulators
www.nxp.com/quicklearning32



MOSFETs

Non-stop applications

- ▶ Cloud computing
- ▶ Network storage
- ▶ Communications infrastructure
- ▶ Industrial process control
- ▶ Transaction processing
- ▶ Traffic monitoring & signaling
- ▶ CCTV security

Non-stop equipment

- ▶ Blade and rack servers
- ▶ Routers, switches & base stations
- ▶ RAID arrays
- ▶ Industrial PCs
- ▶ Programmable Logic Controllers (PLCs)
- ▶ CCTV digital video recorders
- ▶ "Hot-swap" & "soft-start" systems

Featured product: NextPower Live

Mobile phones, ATMs, the internet, traffic signals – so much of our daily life depends on 24/7/365 computers, communications, and storage, made possible by rack-based systems that can be maintained with the power on. NextPower Live MOSFETs are designed specifically for such applications:

- ▶ When a replacement board is plugged into a live system, it is important that the in-rush current is carefully controlled, so as to protect the components on the board and ensure that other parts of the system experience no power disruption. This application requires MOSFETs with strong linear mode performance and a wide safe operating area (SOA) to manage current effectively and reliably.
- ▶ Once the replacement board is safely installed, the MOSFET is turned fully ON. In this mode of operation, a low $R_{DS(on)}$ is of primary importance, helping to keep temperatures low while maximizing system efficiency.
- ▶ Only NextPower Live MOSFETs offer reliable linear mode performance **AND** low $R_{DS(on)}$ efficiency.

NextPower Live portfolio


Package	30 V for 12 V supplies used in computing applications	100 V for 48 V supplies used in computing telecommunications
D ² PAK (SOT404)	PSMN1R5-30BLE PSMN3R4-30BLE	PSMN4R8-100BSE PSMN7R6-100BSE
TO220		PSMN4R8-100PSE PSMN7R8-100PSE
LFPAK56 (Power-SO8)	PSMN2R0-30YLE	PSMN013-100YSE
LFPAK33		(specifically for PoE applications) PSMN040-100MSE PSMN075-100MSE



Power MOSFET operation in linear mode
www.nxp.com/quicklearning34



MOSFETs for Power-over-Ethernet (PoE) PSE applications
www.nxp.com/quicklearning36

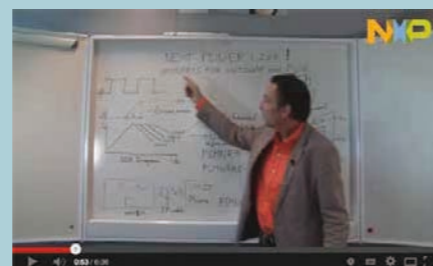

Next Power Live! MOSFETs for HOT SWAP and Power over Ethernet
www.nxp.com/quicklearning29

Featured product: NextPower Cordless


▶ Battery-powered tools, including everything from small engraving devices and screwdrivers to heavy-duty saws and agricultural tools, present a wide variety of requirements for driving the motor. The MOSFETs used in these systems have to perform at demanding levels and must have:

- ▶ Low on-resistance for optimum battery life
- ▶ Low thermal resistance for reduced junction temperature (for greater reliability)
- ▶ High current capability (when the motor stalls, for example)
- ▶ Choice of logic- and standard-level gate drives, depending on battery voltage
- ▶ Excellent avalanche ruggedness to withstand high-load conditions
- ▶ Environmental robustness (wide operating/storage temperatures, harsh vibrations)
- ▶ Competitive cost

Overall, the motor-control MOSFET needs to deliver automotive-grade performance at a commercially competitive price



Typical Power Tools MOSFET internal construction

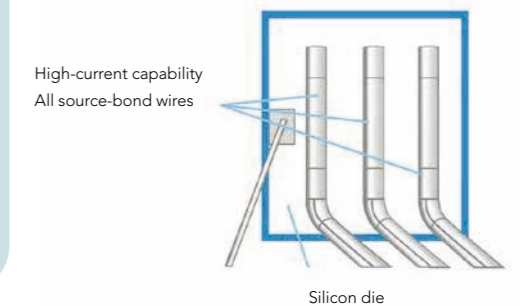

NXP has developed a range of MOSFETs specifically aimed at motor-control applications. These are based on our highly reliable, automotive-qualified silicon, with specific package enhancements such as thicker wires and multiple bond points (“stitch bonding”) to spread the current evenly over the die surface.

NXP’s long history in automotive MOSFETs means we have the know-how to produce devices with excellent avalanche ruggedness. The same expertise deployed in power steering and ABS systems worldwide is put to use in our devices for motor control and that means performance you can count on.

Max current ($I_D(max)$) depends largely on the number and diameter of the aluminium bond wires. The NXP Power Tools portfolio is typically based on a standard of three 500 μm wires, allowing for an $I_D(max)$ rating of up to 150 A in a TO220 package.

Some low $R_{DS(on)}$ devices, based on NXP’s LFPAK56 (Power-SO8 compatible) package, can support an $I_D(max)$ of 300A, perfect for power tool applications where the motor control MOSFETs must be able to support high torque levels, even during “locked-rotor” events.



Single-shot avalanche ruggedness
www.nxp.com/quicklearning35



NextPower Cordless MOSFETs for battery-powered tools
www.nxp.com/quicklearning28

NextPower Cordless portfolio

Type number	V _{DS} [max] (V)	R _{DSon} [max] @ V _{GS} = 10 V (mΩ)	R _{DSon} [max] @ V _{GS} = 4.5 V (mΩ)	I _D [max] (A)	EAS at rated current [mJ]	Package	Gate threshold
PSMN0R9-30YLD	30	0.87	1.09	300	-		Logic Level
PSMN1R0-30YLD	30	1.02	1.3	300	-		Logic Level
PSMN2R0-30YL	30	2	2.63	100	151	LFPAK56	Logic Level
PSMN2R0-30YLE	30	2	3.5	100	370	LFPAK56	Logic Level
PSMN2R5-30YL	30	2.4	3.16	100	103	LFPAK56	Logic Level
PSMN2R6-30YLC	30	2.8	3.65	100	50	LFPAK56	Logic Level
PSMN1R9-40PL	40	1.7	1.94	150	1008	TO220 (SOT78)	Logic Level
PSMN2R1-40PL	40	2.2	2.6	150	622	TO220 (SOT78)	Logic Level
PSMN1R5-40PS	40	1.6	-	120	1400	TO220 (SOT78)	Standard Level
PSMN2R2-40PS	40	2.1	-	100	1240	TO220 (SOT78)	Standard Level
PSMN2R5-60PL	60	2.6	3.15	150	655	TO220 (SOT78)	Logic Level
PSMN2R6-60PS	60	2.9	-	150	519	TO220 (SOT78)	Standard Level
PSMN3R3-60PL	60	3.4	3.8	130	404	TO220 (SOT78)	Logic Level
PSMN3R9-60PS	60	3.9	-	130	372	TO220 (SOT78)	Standard Level
PSMN4R2-60PL	60	4.3	4.3	130	372	TO220 (SOT78)	Logic Level
PSMN7R6-60PS	60	7.8	-	92	110	TO220 (SOT78)	Standard Level

For the most current product information go to www.nxp.com/mosfets (updated daily!)



Heavy-duty tools with large batteries require MOSFETs that withstand higher currents. NXP's TO-220 NextPower Cordless devices handle up to 150A. The high-reliability LFPAK56 is ideal for smaller tools and space-constrained applications.

Power MOSFETs 20 - 25 V

Package	Type number	V _{DS} [max] (V)	R _{DSon} [max] @ V _{GS} = 10 V (mΩ)	R _{DSon} [max] @ V _{GS} = 4.5 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
LFPAK56; Power-SO8 (SOT669)	PH3120L	20	2.65	3.7	100	48.5
	PH2520U	20		2.7	100	78
	PSMN0R9-25YLC	25	0.99	1.25	100	51
	PSMN1R1-25YLC	25	1.15	1.5	100	39
	PSMN1R2-25YL	25	1.2	1.85	100	50.6
	PSMN1R2-25YLC	25	1.3	1.7	100	31
	PSMN1R5-25YL	25	1.5	2.2	100	36
	PSMN2R2-25YLC	25	2.4	3.15	100	18
	PSMN2R9-25YLC	25	3.15	4.1	100	16
	PSMN4R0-25YLC	25	4.5	5.8	84	10.9
	PSMN6R0-25YLB	25	6.1	7.9	73	9
	PSMN6R5-25YLC	25	6.5	8.5	64	8.4
	PH2925U	25		3	100	92
	LFPAK33 (SOT1210)	PSMN2R8-25MLC	25	2.8	3.75	70
PSMN3R9-25MLC		25	4.15	5.55	70	9.7
PSMN9R0-25MLC		25	8.65	11.3	55	5.4
D ² PAK (SOT404)	PHB66NQ03LT	25	10.5		66	12
DPAK (SOT428)	PHD38N02LT	20			44.7	15.1
	PHD97NQ03LT	25	6.3	10.6	75	11.7
SO8 (SOT96-1)	PSMN006-20K	20		5	32	32

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power MOSFETs 30V – Part 1

Package	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ V _{GS} = 10 V (mΩ)	R _{DS(on)} [max] @ V _{GS} = 4.5 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
LFPAK56; Power-SO8 (SOT669)	PSMN0R9-30YLD	30	0.87	1.09	300	51
	PSMN1R0-30YLD	30	1.02	1.3	300	38.2
	PSMN1R0-30YLC	30	1.15	1.4	100	50
	PSMN1R2-30YLD	30	1.24	1.6	100	32
	PSMN1R2-30YLC	30	1.25	1.65	100	38
	PSMN1R3-30YL	30	1.3	1.95	100	46.6
	PSMN1R4-30YLD	30	1.42	1.85	100	27.6
	PSMN1R5-30YL	30	1.5	1.9	100	36.2
	PSMN1R5-30YLC	30	1.55	2.05	100	30
	PSMN1R7-30YL	30	1.7	2.1	100	36.2
	PSMN2R0-30YL	30	2	2.63	100	30
	PSMN2R0-30YLE	30	2	3.5	100	87
	PSMN2R2-30YLC	30	2.15	2.8	100	26
	PSMN2R4-30YLD	30	2.4	3.1	100	18
	PSMN2R5-30YL	30	2.4	3.16	100	27
	PSMN2R6-30YLC	30	2.8	3.65	100	18
	PSMN3R0-30YL	30	3	4.04	100	21
	PSMN3R0-30YLD	30	3.1	4	100	14.5
	PSMN3R2-30YLC	30	3.5	4.55	100	14.2
	PSMN3R5-30YL	30	3.5	4.61	100	19
	PSMN4R0-30YL	30	4	5.25	100	17.6
	PSMN4R0-30YLD	30	4	5.5	95	9.6
	PSMN4R1-30YLC	30	4.35	5.7	92	11
	PSMN4R5-30YLC	30	4.8	6.1	84	9.6
	PSMN5R0-30YL	30	5	6.7	91	14.1
	PSMN6R0-30YL	30	6	7.87	79	11
	PSMN6R0-30YLD	30	6	8.35	66	6.7
	PSMN6R1-30YLD	30	6	8.35	66	6.4
	PSMN6R0-30YLB	30	6.5	8.1	71	9
	PSMN7R0-30YL	30	7	9.1	76	10
	PSMN7R0-30YLC	30	7.1	8.9	61	7.9
	PSMN7R5-30YLD	30	7.5	10.2	51	5.8
	PSMN9R1-30YL	30	9.1	13.6	57	8.4
	PSMN9R5-30YLC	30	9.8	12.1	44	5
	PSMN011-30YLC	30	11.6	14.5	37	4.9
	PSMN013-30YLC	30	13.6	16.9	32	4
LFPAK33 (SOT1210)	PSMN2R4-30MLD	30	2.4	3.2	70	16
	PSMN2R9-30MLC	30	2.95	3.8	70	16.7
	PSMN3R0-30MLC	30	3.15	4.05	70	16.1
	PSMN4R2-30MLD	30	4.3	5.7	70	9.2
	PSMN4R4-30MLC	30	4.65	6	70	10.6
	PSMN7R0-30MLC	30	7	9	67	8.2
	PSMN7R5-30MLD	30	7.6	10.3	57	5.8
	PSMN9R8-30MLC	30	9.8	12.4	50	5
	PSMN013-30MLC	30	13.6	16.9	39	3.7
	PSMN020-30MLC	30	18.1	27	31.8	4.6
D ² PAK (SOT404)	PSMNR90-30BL	30	1	1.4	120	118
	PSMN1R5-30BLE	30	1.5	1.85	120	228
	PSMN1R8-30BL	30	1.8	2.1	100	83
	PSMN1R6-30BL	30	1.9	2.2	100	101
	PSMN2R0-30BL	30	2.1	2.9	100	55
	PSMN2R7-30BL	30	3	3.7	100	32
	PSMN3R4-30BL	30	3.3	3.8	100	31
	PSMN3R4-30BLE	30	3.4	5	120	81
	PSMN4R3-30BL	30	4.1	5.2	100	19
	PSMN017-30BL	30	17	23.3	32	5.1
	PSMN022-30BL	30	22.6	29.6	30	4.4

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power MOSFETs 30V – Part 2


types in **bold** represent new products

Package	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ V _{GS} = 10 V (mΩ)	R _{DS(on)} [max] @ V _{GS} = 4.5 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
DPAK (SOT428)	PHD101NQ03LT	30	5.5		75	23
	PHD71NQ03LT	30	10		75	13.2
TO-220AB (SOT78)	PSMN1R1-30PL	30	1.3	1.6	120	118
	PSMN1R6-30PL	30	1.7	2.1	100	101
	PSMN1R8-30PL	30	1.8	2.3	100	83
	PSMN2R0-30PL	30	2.1	2.8	100	55
	PSMN2R7-30PL	30	2.7	3.6	100	32
	PSMN3R4-30PL	30	3.4	4.1	100	31
	PSMN4R3-30PL	30	4.3	6.2	100	19
	PHP36N03LT	30	17	22	43.4	18.5
	PSMN017-30PL	30	17	23.4	32	5.1
	PSMN022-30PL	30	22	34	30	4.4
I ² PAK (SOT226)	PSMN1R1-30EL	30	1.3	1.6	120	118
	PSMN017-30EL	30	17	23.4	32	5.1
SO8 (SOT96-1)	PHK31NQ03LT	30	4.4	5.6	30.4	33
	PSMN005-30K	30	5.5	8		34
	PHK18NQ03LT	30	8.9	12.5	20.3	10.6
	PHK13N03LT	30	20	26	13.8	10.7
	PHK12NQ03LT	30		14	11.8	

For the most current product information go to www.nxp.com/mosfets (updated daily!)

LFPAK for mechanical and thermal ruggedness

NXP LFPAK

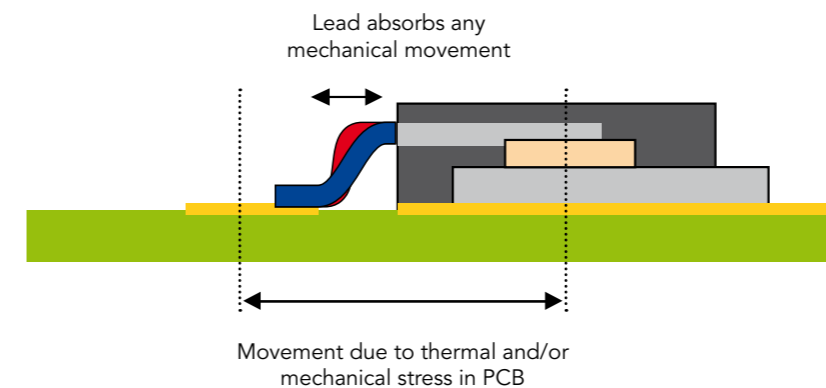

LFPAK pins provide compliance while allowing for thermal expansion due to temperature differences between the MOSFET and the PCB, and allowing for mechanical strain due to PCB bending and flexing

Power MOSFETs 40V


types in **bold** represent new products

Package	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ V _{GS} = 10 V (mΩ)	R _{DS(on)} [max] @ V _{GS} = 4.5 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)	
LFPAK56; Power-SO8 (SOT669)	PSMN1R0-40YLD	40	1.1	1.4	100	59	
	PSMN1R4-40YLD	40	1.4	1.85	100	45	
	PSMN1R6-40YLC	40	1.55	1.8	100	59	
	PSMN1R8-40YLC	40	1.8	2.1	100	45	
	PSMN2R6-40YS	40	2.8		100	63	
	PSMN3R3-40YS	40	3.3		100	49	
	PH4840S	40	4.1		94.5	67	
	PSMN4R0-40YS	40	4.2		100	38	
	PSMN5R8-40YS	40	5.7		90	28.8	
	PSMN8R3-40YS	40	8.6		70	20	
	PSMN014-40YS	40	14		46	12	
	D ² PAK (SOT404)	PSMN1R1-40BS	40	1.3		120	136
		PSMN2R2-40BS	40	2.2		100	130
PSMN2R8-40BS		40	2.9		100	71	
PSMN4R5-40BS		40	4.5		100	35	
TO-220AB (SOT78)	PSMN1R5-40PS	40	1.6		150	136	
	PSMN1R9-40PL	40	1.7	1.94	150	230	
	PSMN2R1-40PL	40	2.2	2.6	150	168.9	
	PSMN2R2-40PS	40	2.1		100	110	
	PSMN2R8-40PS	40	2.8		100	71	
	PSMN4R5-40PS	40	4.6		100	35	
	PSMN8R0-40PS	40	7.6		77	17	
I ² PAK (SOT226)	PSMN1R5-40ES	40	1.6		120	136	

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power-SO8 (LFPAK) Design

- ▶ Low thermal resistance
- ▶ Low electrical resistance
- ▶ Low inductance

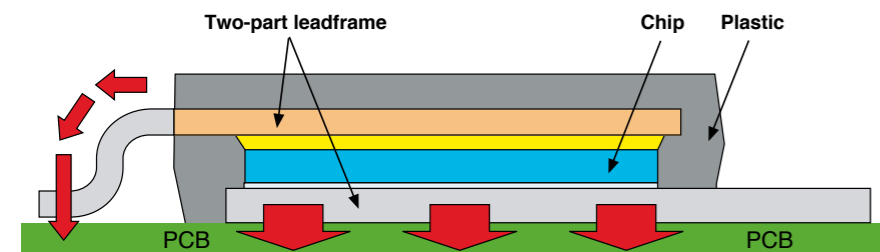

Power MOSFETs 55 - 60V

types in **bold** represent new products

Package	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ V _{GS} = 10 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)	
LFPAK56; Power-SO8 (SOT669)	PH955L	55	8.3	62.5	42	
	PSMN4R0-60YS	60	4	100	56	
	PSMN4R1-60YL	60	4.1	100	103	
	PSMN5R2-60YL	60	5.2	100	78.4	
	PSMN5R5-60YS	60	5.2	100	56	
	PSMN5R6-60YL	60	5.6	100	66.8	
	PSMN7R0-60YS	60	6.4	89	45	
	PSMN7R5-60YL	60	7.5	86	60.6	
	PSMN8R5-60YS	60	8	76	39	
	PSMN012-60YS	60	11.1	59	28.4	
	PSMN013-60YL	60	13	53	33.2	
	PSMN017-60YS	60	15.7	44	20	
	PSMN030-60YS	60	24.7	29	13	
	LFPAK33 (SOT1210)	PSMN011-60ML	60	11.3	61	37.2
		PSMN011-60MS	60	11.3	61	23
D2PAK (SOT404)	PHB191N06LT	55	3.7	75	95.6	
	PHB21N06LT	55	70	19		
	PHB20N06T	55	75	20.3	11	
	PSMN1R7-60BS	60	2	120	137	
	PSMN3R0-60BS	60	3.2	100	130	
	PSMN004-60B	60	3.6	75	168	
	PSMN4R6-60BS	60	4.4	100	70.8	
	PSMN7R6-60BS	60	7.8	92	38.7	
	PSMN015-60BS	60	14.8	50	20.9	
	PHB32N06LT	60	37	34	17	
DPAK (SOT428)	PHD20N06T	55	77	18	11	
	PHP191N06LT	55	3.7	75	95.6	
TO-220AB (SOT78)	PHP20N06T	55	75	20.3	11	
	PSMN2R0-60PS	60	2.2	120	137	
	PSMN2R5-60PL	60	2.6	150	223	
	PSMN2R6-60PS	60	2.6	150	140	
	PSMN3R0-60PS	60	3	100	130	
	PSMN3R3-60PL	60	3.4	130	175	
	PSMN3R9-60PS	60	3.9	130	103	
	PSMN4R2-60PL	60	3.9	130	151	
	PSMN4R6-60PS	60	4.6	100	70.8	
	PSMN7R6-60PS	60	7.8	92	38.7	
	PSMN015-60PS	60	14.8	50	20.9	
	I ² PAK (SOT226)	PSMN2R0-60ES	60	2.2	120	137
		PSMN3R0-60ES	60	3	100	130

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power MOSFETs 75 - 80 V

types in **bold** represent new products

Package	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ V _{GS} = 10 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)	
LFPAK56; Power-SO8 (SOT669)	PSMN8R0-80YL	80	8	100	104	
	PSMN8R2-80YS	80	8.5	82	55	
	PSMN010-80YL	80	10	84	84.7	
	PSMN011-80YS	80	11	67	45	
	PSMN013-80YS	80	12.9	60	37	
	PSMN014-80YL	80	14	62	56.9	
	PSMN018-80YS	80	18	45	26	
	PSMN025-80YL	80	25	37	34.3	
	PSMN026-80YS	80	27.5	34	20	
	PSMN041-80YL	80	41	25	21.9	
	PSMN045-80YS	80	45	24	12.5	
	D2PAK (SOT404)	PSMN005-75B	75	5	75	165
		PSMN008-75B	75	8.5	75	122.8
PHB110NQ08T		75	9	75	113.1	
PHB29N08T		75		27	19	
PSMN2R8-80BS		80	3	120	139	
PSMN3R3-80BS		80	3.5	120	111	
PSMN4R4-80BS		80	4.5	100	125	
PSMN5R0-80BS		80	5.1	100	101	
PSMN6R5-80BS		80	6.9	100	71	
PSMN8R7-80BS		80	8.7	90	52	
PSMN012-80BS		80	11	74	36	
PSMN017-80BS		80	17	50	26	
PSMN050-80BS		80	46	22	11	
TO-220AB (SOT78)		PSMN005-75P	75	5	75	165
		PHP79NQ08LT	75	16	73	30
	PHP29N08T	75		27	19	
	PSMN3R3-80PS	80	3.3	120	139	
	PSMN3R5-80PS	80	3.5	120	139	
	PSMN4R4-80PS	80	4.1	100	112	
	PSMN4R3-80PS	80	4.3	120	111	
	PSMN5R0-80PS	80	4.7	100	87	
	PSMN6R5-80PS	80	6.9	100	71	
	PSMN8R7-80PS	80	8.7	90	52	
	PSMN012-80PS	80	11	74	36	
	PSMN017-80PS	80	17	50	26	
	I2PAK (SOT226)	PSMN3R3-80ES	80	3.3	120	139
		PSMN3R5-80ES	80	3.5	120	139
		PSMN4R3-80ES	80	4.3	120	111

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power MOSFETs 100 V

types in **bold** represent new products

Package	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ V _{GS} = 10 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
LFPAK56; Power-SO8 (SOT669)	PSMN012-100YL	100	11.9	85	118
	PSMN012-100YS	100	12	60	64
	PSMN013-100YSE	100	13	82	75
	PSMN015-100YL	100	14.7	69	86.3
	PSMN016-100YS	100	16.3	51	54
	PSMN019-100YL	100	18	56	72.4
	PSMN020-100YS	100	20.5	43	41
	PSMN021-100YL	100	21.5	49	65.6
	PH20100S	100	23	34.3	39
	PSMN028-100YS	100	27.5	42	33
	PSMN038-100YL	100	37.5	30	21.6
	PSMN039-100YS	100	39.5	28.1	23
	PSMN069-100YS	100	72.4	17	14
LFPAK33 (SOT1210)	PSMN040-100MSE	100	36.6	30	30
	PSMN075-100MSE	100	71	18	16.4
D2PAK (SOT404)	PSMN3R8-100BS	100	3.9	120	170
	PSMN4R8-100BSE	100	4.8	120	196
	PSMN5R6-100BS	100	5.6	100	141
	PSMN7R0-100BS	100	6.8	100	125
	PSMN7R6-100BSE	100	7.6	75	128
	PSMN009-100B	100	8.8	75	156
	PSMN9R5-100BS	100	9.6	89	82
	PSMN013-100BS	100	13.9	68	59
	PSMN015-100B	100	15	75	90
	PSMN016-100BS	100	16	57	49
	PHB45NQ10T	100	25	47	61
	PSMN027-100BS	100	26.8	37	30
	PHB47NQ10T	100	28	47	66
	PSMN034-100BS	100	34.5	32	23.8
	PHB27NQ10T	100	50	28	30
PHB18NQ10T	100	90	18	21	
DPAK (SOT428)	PSMN025-100D	100	25	47	61
TO-220AB (SOT78)	PSMN4R3-100PS	100	4.3	120	170
	PSMN4R8-100PSE	100	5	120	196
	PSMN5R0-100PS	100	5	120	170
	PSMN5R6-100PS	100	5.6	100	141
	PSMN7R0-100PS	100	6.8	100	125
	PSMN7R8-100PSE	100	7.8	83	128
	PSMN8R5-100PS	100	8.5	100	111
	PSMN009-100P	100	8.8	75	156
	PSMN9R5-100PS	100	9.6	89	82
	PSMN013-100PS	100	13.9	68	59
	PSMN015-100P	100	15	75	90
	PSMN016-100PS	100	16	57	49
	PHP45NQ10T	100	25	47	61
	PSMN027-100PS	100	26.8	37	30
	PSMN034-100PS	100	34.5	32	23.8
PHP18NQ10T	100	90	18	21	
I2PAK (SOT226)	PSMN4R3-100ES	100	4.3	120	170
	PSMN5R0-100ES	100	5	120	170
	PSMN7R0-100ES	100	6.8	100	125
	PSMN8R5-100ES	100	8.5	100	111
	PSMN013-100ES	100	13.9	68	59
SC-73 (SOT223)	PHT6NQ10T	100	90	6.5	21
	PHT4NQ10T	100	250	3.5	7.4
SO8 (SOT96-1)	PSMN038-100K	100	38		43
	PHKD3NQ10T	100	90	3	21

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power MOSFETs 105 - 150V

Package	Type number	V _{DS} [max] (V)	R _{DSon} [max] @ V _{GS} = 10 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
LFPAK56; Power-SO8 (SOT669)	PSMN059-150Y	150	59	43	27.9
D ² PAK (SOT404)	PSMN030-150B	150	30	55.5	98
	PSMN035-150B	150	35	50	79
	PHB45NQ15T	150	42	45.1	32
DPAK (SOT428)	PSMN063-150D	150	63	29	55
TO-220AB (SOT78)	PHP45NQ11T	105	25	47	60
	PSMN015-110P	110	15	75	90
	PHP27NQ11T	110	50	27.6	30
	PHP23NQ11T	110	70	23	22
	PHP18NQ11T	110	90	18	21
	PSMN6R3-120PS	120	6.7	70	207.1
	PSMN7R8-120PS	120	7.9	70	167
	PSMN030-150P	150	30	55.5	98
	PSMN035-150P	150	35	50	79
	PHP30NQ15T	150	63	29	55
	PHP28NQ15T	150	65	28.5	24
	I ² PAK (SOT226)	PSMN6R3-120ES	120	6.7	70
PSMN7R8-120ES		120	7.9	70	167
SO8 (SOT96-1)	PHK5NQ15T	150	75	5	29
	PSMN085-150K	150	85	-	40

For the most current product information go to www.nxp.com/mosfets (updated daily!)

P-channel

Package	Type number	V _{DS} [max] (V)	R _{DSon} [max] @ V _{GS} = 10 V (mΩ)	R _{DSon} [max] @ V _{GS} = 4.5 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
SO8 (SOT96-1)	PMK30EP	-30	19	30	-14.9	50
	PMK35EP	-30	19	35	-14.9	42
	PHP225	-30	250	400	-	10
	PMK50XP	-20	-	50	-7.9	10
	PHK04P02T	-16	-	120	-4.66	7.2

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Multi-chip

Package	Type number	Channel type	V _{DS} [max] (V)	R _{DSon} [max] @ V _{GS} = 10 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
SO8 (SOT96-1)	PHP225	P	-30	250	-	10
	PHKD6N02LT	N	20	-	10.9	15.3
	PHKD13N03LT	N	30	20	10.4	10.7
	PHN203	N	30	30	6.3	14.6
	PHN210T	N	30	100	3.4	6
	PHC21025	N/P	30	250	-	10
	PHKD3NQ10T	N	100	90	3	21
	PHC2300	N/P	300	6000	-	6.24


For the most current product information go to www.nxp.com/mosfets (updated daily!)

Power MOSFETs 200V

Package	Type number	V _{DS} [max] (V)	R _{DSon} [max] @ V _{GS} = 10 V (mΩ)	I _D [max] (A)	Q _{G(tot)} [typ] (nC)
LFPAK56; Power-SO8 (SOT669)	PSMN102-200Y	200	102	21.5	30.7
D ² PAK (SOT404)	PSMN057-200B	200	57	39	96
	PSMN070-200B	200	70	35	77
	PHB33NQ20T	200	77	32.7	32.2
	PHB20NQ20T	200	130	20	65
DPAK (SOT428)	PSMN130-200D	200	130	20	65
	PHD9NQ20T	200	400	8.7	24
TO-220AB (SOT78)	PSMN057-200P	200	57	39	96
	PSMN070-200P	200	70	35	77
	PHP33NQ20T	200	77	32.7	32.2
	PHP20NQ20T	200	130	20	65
	PHP9NQ20T	200	400	8.7	24

For the most current product information go to www.nxp.com/mosfets (updated daily!)


PSMN part numbering

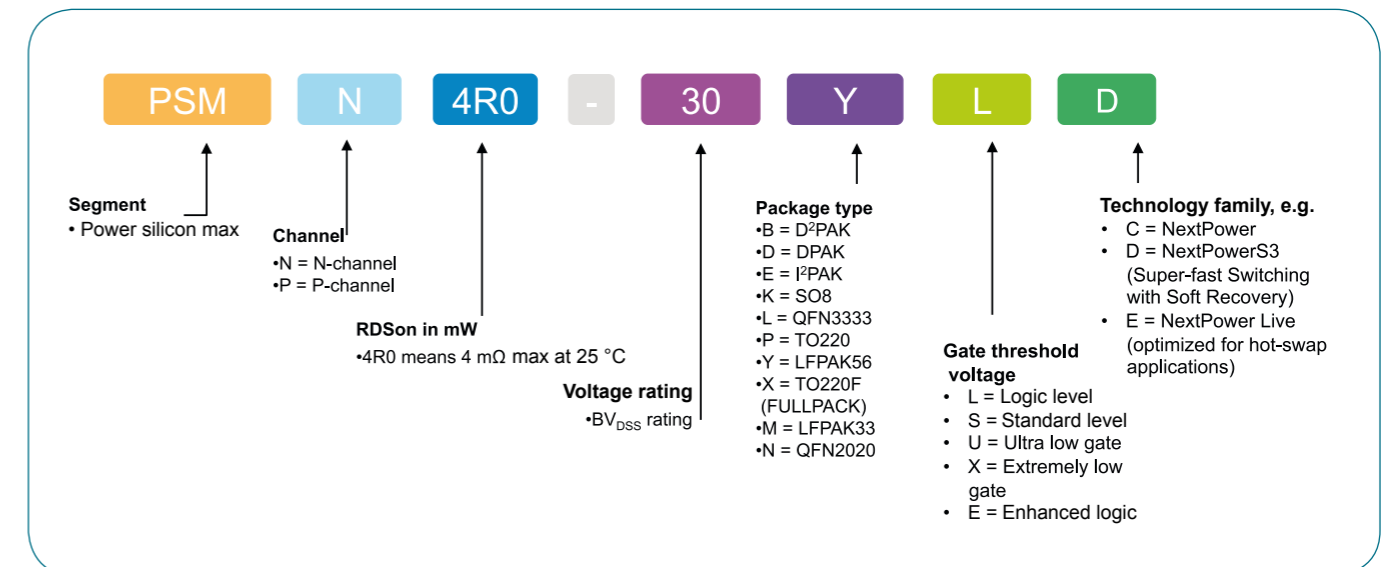

4 steps to select an automotive MOSFET

- 1 Select a voltage, e.g. 40 V
- 2 Select a package, e.g D²PAK
- 3 Choose an R_{DSon} from our extensive range
- 4 Select a 'BUK' type and visit www.nxp.com/automotivemosfets to download datasheets and models, and order samples

Automotive-grade MOSFET product numbering

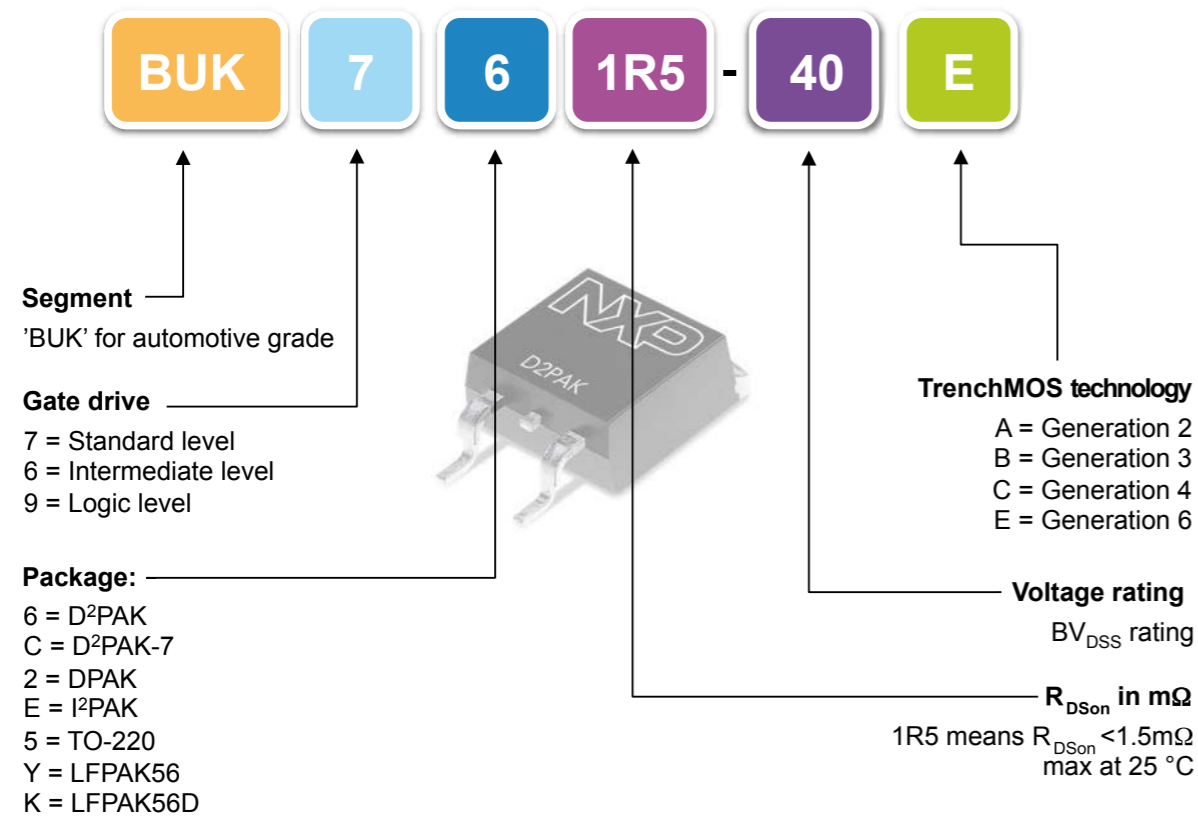

High-performance automotive MOSFETs

MOSFET package selection

Through-hole

TO220

- ▶ Industry standard
- ▶ 120 A



I²PAK

- ▶ Industry standard
- ▶ 120 A




Surface-mount

Premium performance

D²PAK-7

- ▶ Highest performance
- ▶ 190 A



D²PAK

- ▶ Industry standard
- ▶ 120 A



Space saving

LFPAK56

- ▶ PowerSO8
- ▶ 100 A



LFPAK56D

- ▶ Dual Power-SO8
- ▶ 40 A per channel



DPAK

- ▶ Industry standard
- ▶ Proven reliability
- ▶ 100 A



SOT223

- ▶ Industry standard
- ▶ Proven reliability




All packages are automotive AEC-Q101 qualified to 175 °C and RoHS compliant


D²PAK Family

D²PAK Family - Premium performance SMD products

The NXP D²PAK portfolio is ideally suited for high power automotive application areas such as powertrain and chassis & safety. Combining advanced TrenchMOS technology with high current packaging enables a product that delivers ultra low on-state resistance and thermal performance within an industry standard footprint. NXP offers the broadest range of automotive grade D²PAK across V_{DS} 30V-100V.

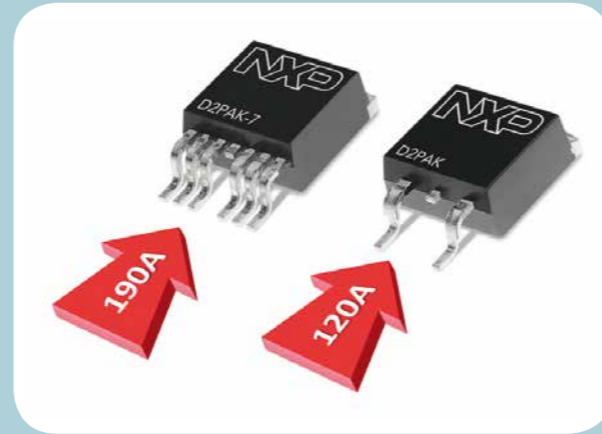

Fully AEC-Q101 qualified to 175 °C


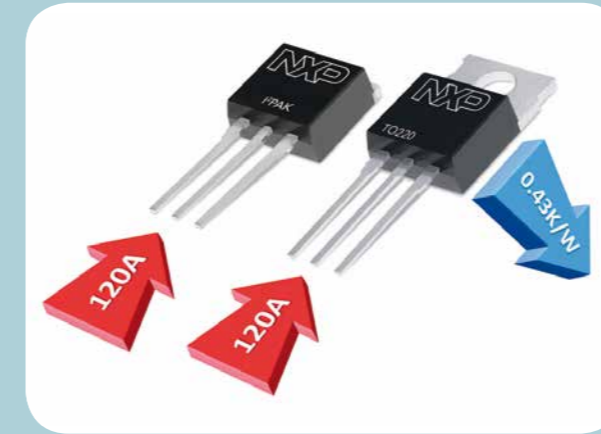


Fully AEC-Q101 qualified to 175 °C

I²PAK/TO-220

I²PAK/TO-220 - High performance through-hole products

Providing industry leading performance for through hole products NXP's I²PAK/TO-220 portfolio enables the separation of the electrical and thermal pathways to optimise module performance. The convenience of the tab for screw mounting on the TO-220 is complemented by industry standard footprint and excellent current handling performance. Similarly the I²PAK can be readily soldered down to form a low resistance path.

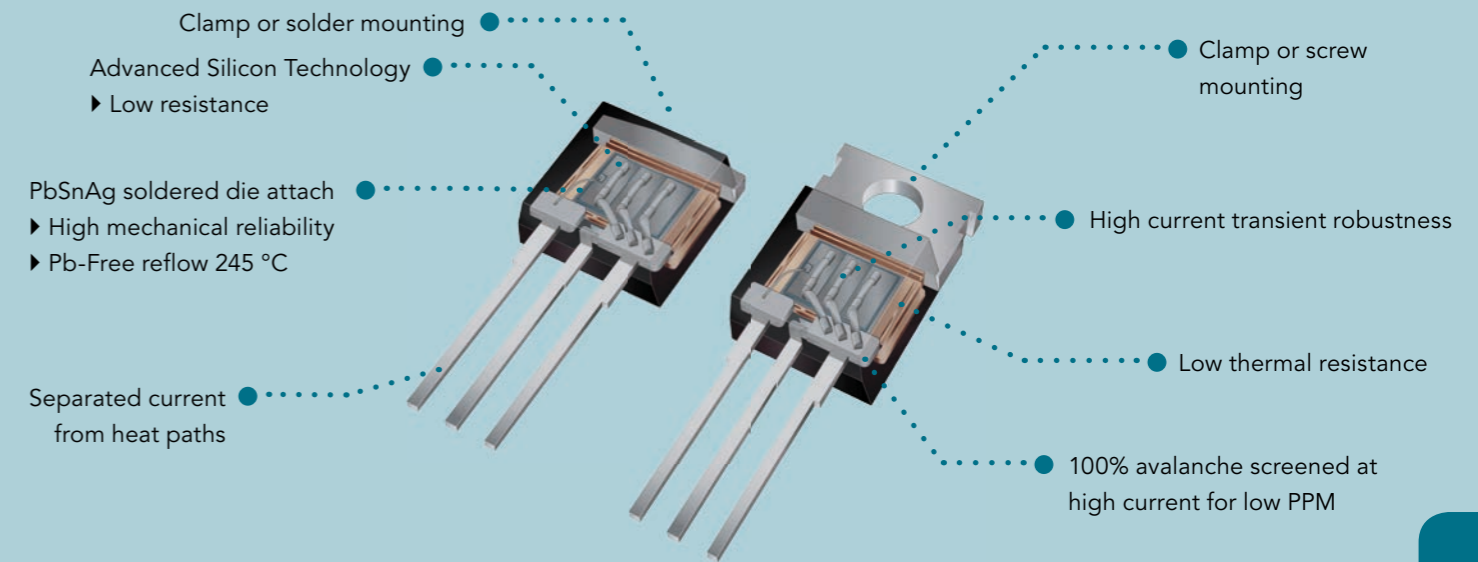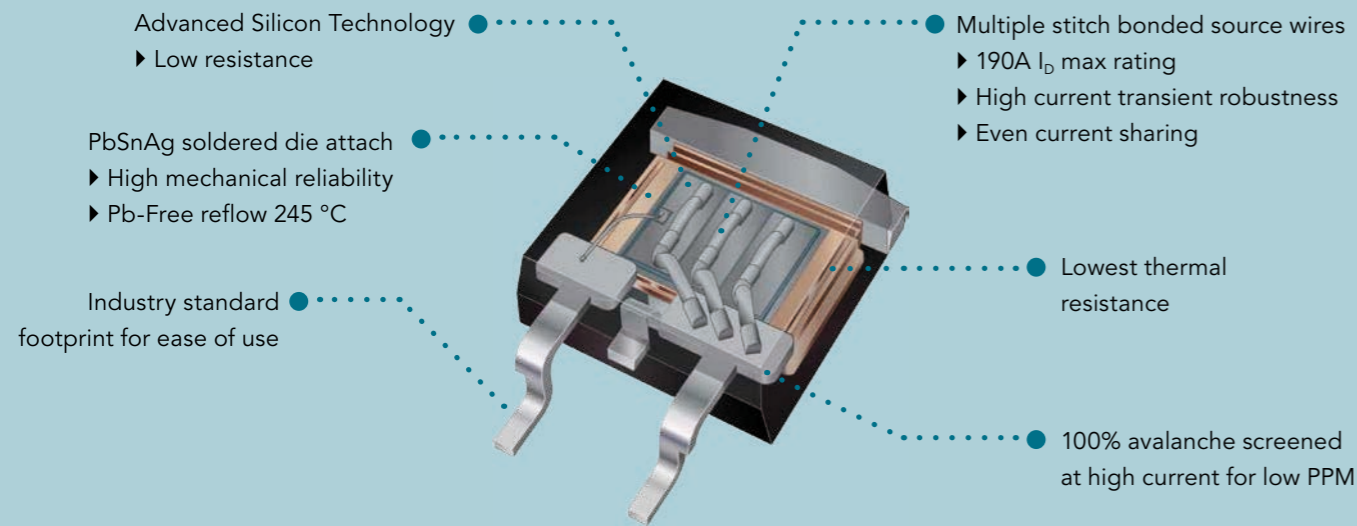

POWERTRAIN

- ▶ Engine Control
- ▶ Gearbox/Clutch
- ▶ Engine Fan
- ▶ Electric Vehicle
- ▶ Micro-Hybrid drive
- ▶ DCDC converters



CHASSIS & SAFETY

- ▶ Electric Power Steering (EPS)
- ▶ Vehicle Stability (ESP)
- ▶ Braking Systems (ABS)
- ▶ Electric Parking Brake (EPB)



BODY & SECURITY

- ▶ Climate control (HVAC)
- ▶ Wiper Systems



POWERTRAIN

- ▶ Engine Control
- ▶ Engine Fan
- ▶ Electric Vehicle
- ▶ Micro-Hybrid drive
- ▶ DCDC converters



CHASSIS & SAFETY

- ▶ Electric Power Steering (EPS)
- ▶ Braking Systems (ABS)
- ▶ Electric Parking Brake (EPB)



BODY & SECURITY

- ▶ Climate Control (HVAC)
- ▶ Wiper Systems
- ▶ Electric Horn



LFPAK56

The Power-SO8 that packs a punch

Providing a true alternative to DPAK, NXP's LFPAK56 portfolio gives industry-leading performance in a truly innovative, automotive-grade package. Saving a considerable amount of space compared to traditional DPAK solutions, the LFPAK56 offers designers flexibility and reliability without compromising thermal performance.



Fully AEC-Q101 qualified to 175 °C

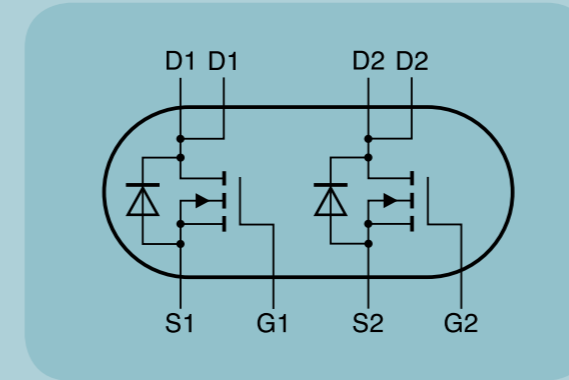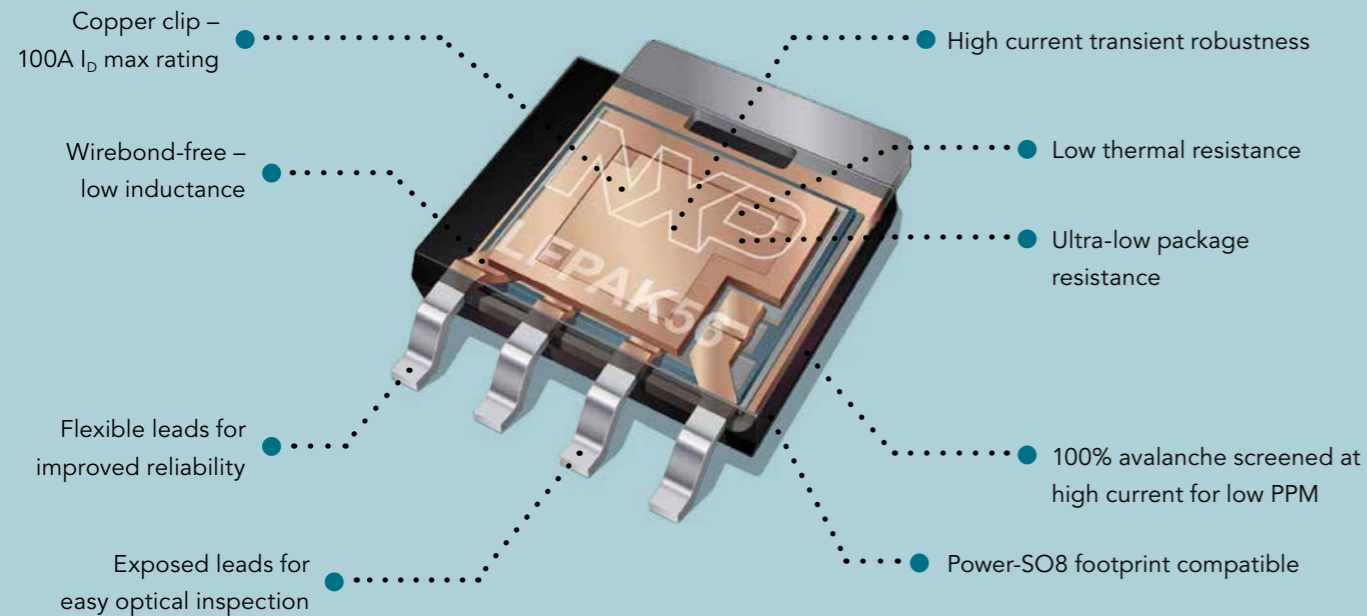


Fully AEC-Q101 qualified to 175 °C

LFPAK56D

The ultimate dual MOSFET

Packing even more into the Power-SO8 footprint, the LFPAK56D fits two MOSFETs into one robust package without compromising on performance. NXP's cutting-edge copper-clip technology allows for exceptional current handling, ultra-low package resistance, and supreme robustness and reliability. Perfect for situations where space is at a premium, the LFPAK56D offers power performance.

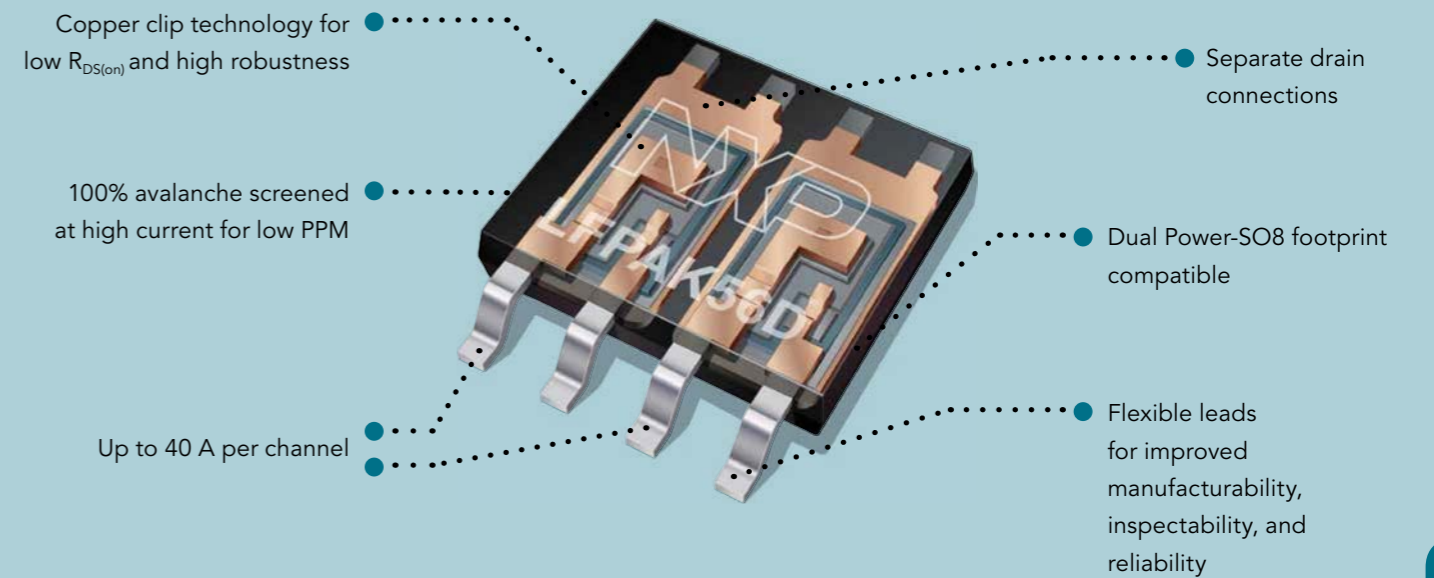

POWERTRAIN

- ▶ Engine management
- ▶ Gearbox / clutch
- ▶ Engine fan
- ▶ Fuel / water pump
- ▶ Auxiliary valves



CHASSIS & SAFETY

- ▶ Vertical stability (ESP)
- ▶ Braking systems (ABS)
- ▶ Airbag
- ▶ Electric Parking Brake (EPB)



BODY & SECURITY

- ▶ Body control module
- ▶ Climate control (HVAC)
- ▶ Wiper systems
- ▶ Electric windows
- ▶ Electric mirrors
- ▶ Electric seats
- ▶ Sunroof
- ▶ Lighting

LFPAK56D footprint comparison

Product	Pad layout	Footprint area
		31 mm ²
		62 mm ²
		140 mm ²

Automotive-compliant small-signal MOSFETs

types in **bold** represent new products

															SOT223	SOT457 (SC-74)	SOT23	SOT363 (SC-88)	SOT323 (SC-70)	SOT666	DFN-2020MD-6 (SOT1220)	DFN2020-6 (SOT1118)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)		
Package																										
Size (mm)															6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.65	2.0 x 2.0 x 0.65	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.5		
P _{tot} (mW)															1700	600	250	300	200	300	1250	1250	1000	250		
Polarity	Configuration	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)	t _{on} typ (ns)	t _{off} typ (ns)	Q _s typ (nC)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =															
											10 V	4.5 V	2.5 V	1.8 V												
N-channel	single	20	8	4.7	0.45	1	8.2	39.5	6.2	2	-	24	29	40		PMN28UNEA	PMV28UNEA									
			12	6.3	0.75	1.25	16	44	9.9	2	-	16	24	-		PMV20XNEA			PMPB20XNEA							
		30	8	0.4	0.6	1.1	26	88	0.52	2	-	1000	1400	2000			NX3008NBK		NX3008NBKW							
			12	3.1	0.75	1.25	9	19	2.9	2	-	55	72	-						PMDPB56XNEA						
		40	20	5.5	1	2.5	8	33	12.6	2	17	22	-	-		PMN25ENEA	PMV25ENEA									
				3.9	1	2.5	6.3	14.1	6	2	30	39	-	-			PMV50ENEA									
		60	20	3	1	2.5	6	11	3.6	2	54	70	-	-			PMV100ENEA									
					3.1	1	2.5	-	-	-	1	65	88	-	-			PMV65ENEA								
				2.5	1	2.5	14	14	2.4	1	95	120	-	-			PMV130ENEA									
				4	1.3	2.7	4.5	13.5	7.5	1	42	48	-	-						PMPB55ENEA						
				3.1	1.3	2.7	9	33	12.7	2	46	52	-	-		PMN55ENEA	PMV55ENEA									
				4	1.3	2.7	4	10.5	6.2	2.7	72	85	-	-						PMPB85ENEA						
				2.1	1.3	2.7	6.4	15.9	5.9	2	96	108	-	-		PMN120ENEA	PMV120ENEA									
				1.5	1.3	2.7	6.3	13	3.9	2	176	196	-	-		PMN230ENEA	PMV230ENEA									
				0.8	1.3	2.7	5.3	10.2	2.4	2	300	332	-	-			PMV450ENEA									
				0.36	0.9	1.5	5	13	0.72	-	900	1000	-	-				BSS138P		BSS138PW						
		0.36	0.48	1.6	10	58	0.6	1.5	1000	1100	1400	-				BSS138BK		BSS138BKW								
		0.3	1	2.5	11	19	0.5	2	1000	1300	-	-				2N7002BK		2N7002BKW						2N7002BKM		
		0.3	1	2.5	16	60	1.09	3	1100	1300	-	-				2N7002CK										
		0.2	0.8	1.5	5	36	0.39	yes	2700	3000	4000	-				BSS138AKA										
		80	20	1.9	1.3	2.7	3.5	9.5	4.8	2	175	195	-	-						PMPB215ENEA						
				2.8	1.3	2.7	5	15	9.9	2.8	80	92	-	-						PMPB95ENEA						
				1.1	1.3	2.7	2	9	3	2	345	390	-	-										PMXB360ENEA		
		100	20	1.5	1.3	2.7	4.8	9.3	4.5	1	285	300	-	-		PMT280ENEA										
				1.1	1.3	2.7	5.7	10.2	2.9	1	527	555	-	-		PMT560ENEA										
		dual	20	8	0.8	0.5	0.95	10	117	0.45	2	-	380	620	1100						PMDT290UNE					
				30	8	0.4	0.6	1.1	26	88	0.52	2	-	1000	1400	2000					NX3008NBKS		NX3008NBKV			
				60	20	0.3	1	2.5	11	19	0.5	2	1000	1300	-	-					2N7002BKS					
						0.36	0.48	1.6	10	58	0.6	1.5	1000	1100	1400	-				BSS138BKS						
				0.36	0.9	1.5	5	13	0.72	-	900	1000	-	-					BSS138PS							

MOSFETs


30 V N-channel automotive TrenchMOS

types in **bold** represent new products

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]
LFPAK56; Power-SO8 (SOT669)	BUK9Y07-30B	30	6	7	75	1.42
	BUK7Y07-30B	30	7		75	1.42
	BUK9Y11-30B	30	9	11	59	2
	BUK7Y10-30B	30	10		67	1.76
	BUK9Y22-30B	30	19	22	37.7	2.53
	BUK7Y20-30B	30	20		39.5	2.53
LFPAK56D (SOT1205)	BUK7K5R1-30E	30	5.1		40	2.21
	BUK7K5R6-30E	30	5.6		40	2.36
	BUK9K5R1-30E	30	4.4	5.3	40	2.21
	BUK9K5R6-30E	30	4.7	5.8	40	2.36
D ² PAK (SOT404)	BUK962R8-30B	30	2.4	2.8	75	0.5
	BUK762R7-30B	30	2.7		75	0.5
	BUK763R4-30B	30	3.4		75	0.59
	BUK9605-30A	30	4.6	5	75	0.65
	BUK9607-30B	30	5	7	75	0.95
	BUK7607-30B	30	7		75	0.95
DPAK (SOT428)	BUK9214-30A	30	12	14	63	1.4
	BUK6213-30A	30	13		55	1.4
TO-220AB (SOT78A)	BUK952R8-30B	30	2.4	2.8	75	0.5
	BUK9507-30B	30	5	7	75	0.95
	BUK7507-30B	30	7		75	0.95

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Automotive TrenchMOS part numbering

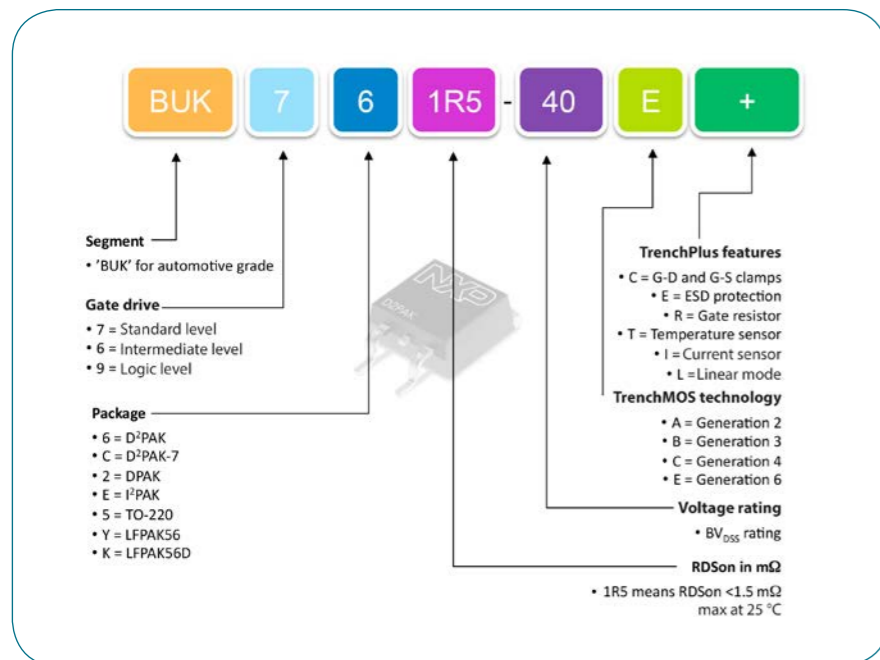

40 V N-channel automotive TrenchMOS – Part I

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]	
LFPAK56; Power-SO8 (SOT669)	BUK9Y3R0-40E	40	2.5	3	100	0.77	
	BUK7Y3R5-40E	40	3.5		100	0.9	
	BUK9Y3R5-40E	40	3.6	3.8	100	0.9	
	BUK9Y4R4-40E	40	3.7	4.4	100	1.02	
	BUK7Y4R4-40E	40	4.4		100	1.02	
	BUK9Y7R6-40E	40	6	7.6	79	1.58	
	BUK7Y7R6-40E	40	7.6		79	1.58	
	BUK9Y09-40B	40	8	9	75	1.42	
	BUK7Y08-40B	40	8		75	1.42	
	BUK9Y12-40E	40	10	12	52	2.31	
	BUK9Y14-40B	40	11	14	56	1.8	
	BUK7Y12-40E	40	12		52	2.31	
	BUK7Y13-40B	40	13		58	1.8	
	BUK9Y21-40E	40	17	21	33	3.33	
	BUK7Y21-40E	40	21		33	3.33	
	BUK9Y27-40B	40	24	27	34	2.53	
	BUK9Y29-40E	40	25	29	25	4.03	
	BUK7Y25-40B	40	25		35.3	2.53	
	LFPAK56D (SOT1205)	BUK7Y29-40E	40	29		26	4.03
		BUK7K6R2-40E	40	5.8			2.21
BUK9K6R2-40E		40	6	6.2	40	2.21	
BUK9K6R8-40E		40	6.1	7.2	40	2.36	
BUK7K6R8-40E		40	6.8			2.36	
BUK9K8R7-40E		40	8	9.4	30	2.84	
BUK7K8R7-40E		40	8.5			2.84	
BUK9K18-40E		40	16	19.5	30	3.96	
BUK7K18-40E		40	19		24.2	3.96	
BUK9K25-40E		40	24	29	18.2	4.68	
BUK7K25-40E		40	25			4.68	
D ² PAK (SOT404)		BUK961R6-40E	40	1.4	1.6	120	0.43
	BUK762R0-40E	40	2		120	0.51	
	BUK962R6-40E	40	2.4	2.8	100	0.57	
	BUK762R6-40E	40	2.6		100	0.57	
	BUK963R1-40E	40	2.7	3.1	100	0.64	
	BUK963R2-40B	40	2.8	3.2	100	0.5	
	BUK762R9-40E	40	2.9		100	0.64	
	BUK763R1-40B	40	3.1		75	0.5	
	BUK964R1-40E	40	3.5	4.1	75	0.82	
	BUK9604-40A	40	4	4.4	75	0.5	
	BUK964R4-40B	40	4	4.4	75	0.59	

For the most current product information go to www.nxp.com/mosfets (updated daily!)

40 V N-channel automotive TrenchMOS – Part 2

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]
D ² PAK (SOT404)	BUK764R0-40E	40	4		75	0.82
	BUK965R4-40E	40	4.4	5.4	75	1.09
	BUK7604-40A	40	4.5		75	0.5
	BUK765R3-40E	40	4.9		75	1.09
	BUK9606-40B	40	5	6.4	75	0.74
	BUK765R2-40B	40	5.2		75	0.74
	BUK9609-40B	40	7	9	75	0.95
	BUK768R1-40E	40	7.2		75	1.56
	BUK7608-40B	40	8		75	0.95
	BUK761R6-40E	40	1.57		120	0.43
	BUK761R7-40E	40	1.6		120	0.46
DPAK (SOT428)	BUK9209-40B	40	7	9	75	0.95
	BUK7208-40B	40	8		75	0.95
TO-220AB (SOT78A)	BUK751R8-40E	40	1.8		120	0.43
	BUK752R3-40E	40	2.3		120	0.51
	BUK953R2-40B	40	2.8	3.2	100	0.5
	BUK753R1-40E	40	3.1		100	0.64
	BUK9504-40A	40	4	4.4	75	0.5
	BUK954R4-40B	40	4	4.4	75	0.59
	BUK9506-40B	40	5	6.4	75	0.74
	BUK755R2-40B	40	5.2		75	0.74
	BUK9509-40B	40	7	9	75	0.95
	BUK758R3-40E	40	7.4		75	1.56
FPAK (SOT226)	BUK7508-40B	40	8		75	0.95
	BUK7E1R8-40E	40	1.8		120	0.43
	BUK7E1R9-40E	40	1.9		120	0.46
	BUK7E2R3-40E	40	2.3		120	0.51
	BUK7E3R1-40E	40	3.1		100	0.64
	BUK9E04-40A	40	4	4.4	75	0.5
	BUK7E04-40A	40	4.5		75	0.5
BUK7E8R3-40E	40	7.4		75	1.56	

For the most current product information go to www.nxp.com/mosfets (updated daily!)

55 - 60 V N-channel automotive TrenchMOS – Part I

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]
LFPAK56; Power-SO8 (SOT669)	BUK9Y12-55B	55	11	12	61.8	1.42
	BUK7Y12-55B	55	12		61.8	1.42
	BUK9Y19-55B	55	17.3	19	46	1.8
	BUK7Y18-55B	55	18		47.4	1.76
	BUK9Y40-55B	55	36	40	26	2.5
	BUK9Y4R8-60E	60	4.1	4.8	100	0.63
	BUK7Y4R8-60E	60	4.8		100	0.63
	BUK9Y6R0-60E	60	5.2	6	100	0.77
	BUK9Y7R2-60E	60	5.6	7.2	100	0.9
	BUK7Y6R0-60E	60	6		100	0.77
	BUK7Y7R2-60E	60	7.2		100	0.9
	BUK9Y8R7-60E	60	7.5	8.7	86	1.02
	BUK7Y8R7-60E	60	8.7		87	1.02
	BUK9Y15-60E	60	13	15	53	1.58
	BUK7Y15-60E	60	15		53	1.59
	BUK9Y25-60E	60	21.5	25	34	2.31
	BUK7Y25-60E	60	25		34	2.31
	BUK9Y43-60E	60	38	43	22	3.33
	BUK7Y43-60E	60	43		22	3.33
	LFPAK56D (SOT1205)	BUK9Y59-60E	60	52	59	16.7
BUK7Y59-60E		60	59		17	4.03
BUK7K12-60E		60	9.3			2.21
BUK9K12-60E		60	10.7	11.5	35	2.21
BUK7K13-60E		60	10		40	2.36
BUK9K13-60E		60	11.2	12.5	40	2.36
BUK7K17-60E		60	14			2.84
BUK9K17-60E		60	15.6	17	26	2.84
BUK7K35-60E		60	30		20.7	3.96
BUK9K35-60E		60	32	35	22	3.96
D ² PAK (SOT404)	BUK7K52-60E	60	45		15.4	4.68
	BUK9K52-60E	60	49	55	16	4.68
	BUK964R2-55B	55	3.7	4.2	75	0.5
	BUK764R0-55B	55	4		75	0.5
	BUK9606-55B	55	5.4	6	75	0.58
	BUK9606-55A	55	5.8	6.3	75	0.5
	BUK7606-55B	55	6		75	0.59
	BUK7606-55A	55	6.3		75	0.5
	BUK9608-55B	55	7	8.4	75	0.74
	BUK7607-55B	55	7.1		75	0.74
BUK9608-55A	55	7.5	8	75	0.59	

For the most current product information go to www.nxp.com/mosfets (updated daily!)

55 - 60 V N-channel automotive TrenchMOS – Part 2

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]
D ² PAK (SOT404)	BUK7608-55A	55	8		75	0.59
	BUK9612-55B	55	10	12	75	0.95
	BUK7610-55AL	55	10		75	0.5
	BUK7611-55A	55	11		75	0.9
	BUK7611-55B	55	11		75	0.95
	BUK9614-55A	55	13	14	73	1
	BUK9616-55A	55	15	16	66	
	BUK9620-55A	55	18	20	54	1.2
	BUK7620-55A	55	20		54	1.2
	BUK9624-55A	55	21.7	24	46	1.4
	BUK7624-55A	55	24		47	
	BUK9628-55A	55	25	28	42	1.5
	BUK7628-55A	55	28		42	
	BUK9635-55A	55	32	35	34	1.8
	BUK7635-55A	55	35		35	1.7
	BUK9675-55A	55	68	75	20	2.4
	BUK7675-55A	55	75		20.3	2.4
	BUK962R5-60E	60	2.3	2.5	120	0.43
	BUK762R4-60E	60	2.4		120	0.43
	BUK962R8-60E	60	2.5	2.8	120	0.46
	BUK762R6-60E	60	2.6		120	0.46
	BUK963R3-60E	60	3	3.3	120	0.51
	BUK763R1-60E	60	3.1		120	0.51
	BUK964R2-60E	60	3.9	4.2	100	0.57
	BUK763R9-60E	60	3.9		100	0.57
	BUK964R8-60E	60	4.4	4.8	100	0.64
	BUK764R4-60E	60	4.5		100	0.64
	BUK966R5-60E	60	5.9	6.5	75	0.82
	BUK766R0-60E	60	6		75	0.82
	BUK969R0-60E	60	8	9	75	1.09
	BUK768R3-60E	60	8.3		75	1.09
	BUK9614-60E	60	12.8	14	56	1.56
BUK7613-60E	60	13		58	1.56	
D ² PAK-7 (SOT427)	BUK9C10-55BIT	55	9	10	75	0.78
DPAK (SOT428)	BUK9212-55B	55	10	12	75	0.95
	BUK7210-55B	55	10		75	0.95
	BUK7212-55B	55	12		75	0.95
	BUK9215-55A	55	13.6	15	62	1.3
	BUK7215-55A	55	15		62	1.3
	BUK9219-55A	55	17.6	19	55	1.3

For the most current product information go to www.nxp.com/mosfets (updated daily!)

55 - 60 V N-channel automotive TrenchMOS – Part 3

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]	
DPAK (SOT428)	BUK7219-55A	55	19		55	1.3	
	BUK9222-55A	55	20	22	48	1.5	
	BUK9225-55A	55	22	25	43	1.6	
	BUK7222-55A	55	22		48	1.5	
	BUK7230-55A	55	30		38	1.7	
	BUK9237-55A	55	33	37	32	1.94	
	BUK7237-55A	55	37		32.3	1.9	
	BUK9245-55A	55	40	45	28	2.1	
	BUK9277-55A	55	69	77	18	2.93	
	BUK7277-55A	55	77		18	2.9	
	BUK92150-55A	55	125	140	11	4.1	
	BUK72150-55A	55	150		11	4.1	
	TO-220AB (SOT78A)	BUK954R2-55B	55	3.7	4.2	75	0.5
		BUK754R0-55B	55	4		75	0.5
BUK7506-55A		55	6.3		75	0.5	
BUK9508-55B		55	7	8.4	75	0.74	
BUK7507-55B		55	7.1		75	0.74	
BUK7508-55A		55	8		75	0.59	
BUK7509-55A		55	9		75	0.71	
BUK9511-55A		55	10	11	75	0.9	
BUK9512-55B		55	10	12	75	0.95	
BUK7511-55B		55	11		75	0.95	
BUK9514-55A		55	13	14	73	1	
BUK9518-55A		55	16	18	61	1.1	
BUK7516-55A		55	16		65.7	1.1	
BUK7520-55A		55	20		54	1.2	
BUK7528-55A		55	28		42	1.5	
BUK9535-55A		55	32	35	34	1.8	
BUK7535-55A		55	35		35	1.7	
BUK9575-55A		55	68	75	20	2.4	
BUK7575-55A		55	75		20.3	2.4	
BUK953R5-60E		60	3.4	3.7	120	0.51	
BUK954R8-60E		60	4.5	4.9	100	0.64	
I ² PAK (SOT226)		BUK9E06-55B	55	5.4	6	75	0.58
		BUK9E06-55A	55	5.8	6.3	75	0.5
		BUK9E08-55B	55	7	8.4	75	0.74
	BUK7E2R6-60E	60	2.6		120	0.43	
	BUK7E3R5-60E	60	3.5		120	0.51	
	BUK7E4R6-60E	60	4.6		100	0.64	
	BUK7E13-60E	60	13		58	1.56	

For the most current product information go to www.nxp.com/mosfets (updated daily!)

75 - 80 V N-channel automotive TrenchMOS

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]
LFPAK56; Power-SO8 (SOT669)	BUK9Y19-75B	75	18	19	48.2	1.42
	BUK7Y18-75B	75	18		49	1.42
	BUK9Y30-75B	75	28	30	34	1.8
	BUK7Y28-75B	75	28		35.5	1.76
	BUK9Y58-75B	75	53	58	20.73	2.53
	BUK7Y7R8-80E	80	7.8		100	0.63
	BUK9Y8R5-80E	80	8	8.5	100	0.63
	BUK7Y9R9-80E	80	9.9		89	0.77
	BUK9Y11-80E	80	10	11	84	0.77
	BUK9Y14-80E	80	14	15	62	1.02
	BUK7Y14-80E	80	14		65	1.02
	BUK9Y25-80E	80	25	27	37	1.58
	BUK7Y25-80E	80	25		39	1.58
	BUK9Y41-80E	80	41	45	24	2.33
	BUK7Y41-80E	80	41		25	2.31
	BUK9Y72-80E	80	72	78	15	3.33
	BUK7Y72-80E	80	72		16	3.33
	BUK9Y107-80E	80	98	107	11.8	4.03
BUK7Y98-80E	80	98		12.3	4.03	
D ² PAK (SOT404)	BUK9606-75B	75	5.5	6.1	75	0.5
	BUK7606-75B	75	5.6		75	0.5
	BUK9609-75A	75	8.5	9	75	0.65
	BUK7609-75A	75	9		75	0.65
	BUK7613-75B	75	13		75	0.95
	BUK9616-75B	75	14	16.4	67	0.95
	BUK7623-75A	75	23		53	1.1
	BUK763R8-80E	80	3.8		120	0.43
	BUK964R2-80E	80	4	4.2	120	0.43
	BUK764R2-80E	80	4.2		120	0.46
	BUK964R7-80E	80	4.5	4.7	120	0.46
	BUK769R6-80E	80	9.6		75	0.82
	BUK9611-80E	80	10	11	75	0.82
DPAK (SOT428)	BUK7214-75B	75	14		69	0.95
	BUK9217-75B	75	15	17	64	0.95
	BUK9226-75A	75	24.6	26	45	1.3
	BUK7226-75A	75	26		45	1
TO-220AB (SOT78A)	BUK9506-75B	75	5.5	6.1	75	0.5
	BUK7509-75A	75	9		75	0.65
	BUK7513-75B	75	13		75	0.95
	BUK753R8-80E	80	4		120	0.43

For the most current product information go to www.nxp.com/mosfets (updated daily!)

100 V N-channel automotive TrenchMOS – Part I

types in **bold** represent new products

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]	
LFPAK56; Power-SO8 (SOT669)	BUK9Y12-100E	100	11.9	12	85	0.63	
	BUK7Y12-100E	100	12		85	0.63	
	BUK9Y15-100E	100	14.7	15	69	0.77	
	BUK7Y15-100E	100	15		68	0.77	
	BUK9Y19-100E	100	18	19	56	0.9	
	BUK7Y19-100E	100	19		56	0.9	
	BUK9Y22-100E	100	21.5	22	49	1.02	
	BUK7Y22-100E	100	22		49	1.02	
	BUK9Y38-100E	100	37.5	38	30	1.58	
	BUK7Y38-100E	100	38		30	1.58	
	BUK9Y53-100B	100	49	53	23	2	
	BUK7Y53-100B	100	53		24.8	1.76	
	BUK9Y65-100E	100	63.3	65	19	2.31	
	BUK7Y65-100E	100	65		19	2.31	
	BUK9Y104-100B	100	99	104	14.8	2.53	
	BUK7Y102-100B	100	102		15	2.53	
	BUK9Y113-100E	100	110	113	12	3.33	
	BUK7Y113-100E	100	113		12	3.33	
	BUK9Y153-100E	100	146	153	9.4	4.03	
	BUK7Y153-100E	100	153		9.4	4.03	
LFPAK56D (SOT1205)	BUK7K29-100E	100	24.5		29.5	2.21	
	BUK9K29-100E	100	27	29	30	2.21	
	BUK7K32-100E	100	27.5		29	2.36	
	BUK9K32-100E	100	31	33	26	2.36	
	BUK7K45-100E	100	37.6		21.4	2.84	
	BUK9K45-100E	100	42	45	21	2.84	
	BUK7K89-100E	100	82.5		13	3.96	
	BUK9K89-100E	100	85	89	12.5	3.96	
	BUK7K134-100E	100	121		9.8	4.68	
	BUK9K134-100E	100	154	159	8.5	4.68	
	D ² PAK (SOT404)	BUK765R0-100E	100	5		120	0.43
		BUK965R8-100E	100	5.6	5.8	120	0.43
		BUK768R1-100E	100	8.1		100	0.57
BUK969R3-100E		100	8.9	9.3	100	0.57	
BUK9610-100B		100	9.7	10	75	0.5	
BUK7610-100B		100	10		75	0.5	
BUK7613-100E		100	13		72	0.82	
BUK9615-100E		100	14	15	66	0.82	
BUK9615-100A		100	14.4	15	75	0.65	
BUK9620-100B		100	18.5	20	63	0.75	

For the most current product information go to www.nxp.com/mosfets (updated daily!)


100V N-channel automotive TrenchMOS – Part 2

types in **bold** represent new products

Package name	Type number	V _{DS} [max] [V]	R _{DSon} [max] @ 10 V [mΩ]	R _{DSon} [max] @ 5 V [mΩ]	I _D [max] @ 25 °C [A]	R _{th(j-mb)} [max] [K/W]
D ² PAK (SOT404)	BUK7620-100A	100	20		63	0.75
	BUK7626-100B	100	26		49	0.95
	BUK9628-100A	100	27	28	49	0.9
	BUK9629-100B	100	27	29	46	0.95
	BUK7628-100A	100	28		47	0.9
	BUK7631-100E	100	31		34	1.56
	BUK7635-100A	100	35		41	1
	BUK9637-100E	100	36	37	31	1.56
	BUK9640-100A	100	39	40	39	0.95
	BUK7640-100A	100	40		37	1.1
	BUK9660-100A	100	58	60	26	1.4
	BUK7660-100A	100	60		26	1.4
	BUK9675-100A	100	72	75	23	1.5
	BUK7675-100A	100	75		23	1.5
	BUK96180-100A	100	173	180	11	2.8
DPAK (SOT428)	BUK7227-100B	100	27		48	0.95
	BUK9230-100B	100	28	30	47	0.95
	BUK9240-100A	100	38.6	40	33	1.3
	BUK7240-100A	100	40		34	1.3
	BUK9275-100A	100	72	75	21.7	1.7
TO-220AB (SOT78A)	BUK755R4-100E	100	5.2		120	0.43
	BUK9510-100B	100	9.7	10	75	0.5
	BUK7510-100B	100	10		75	0.5
	BUK9515-100A	100	14.4	15	75	0.65
	BUK7515-100A	100	15		75	0.5
	BUK9520-100B	100	18.5	20	63	0.75
	BUK9520-100A	100	19	20	63	0.75
	BUK7520-100A	100	20		63	0.75
	BUK7526-100B	100	26		49	0.95
	BUK9529-100B	100	27	29	46	0.95
	BUK7528-100A	100	28		47	0.9
	BUK9535-100A	100	34	35	41	1
	BUK7535-100A	100	35		41	1
	BUK9575-100A	100	72	75	23	1.5
	BUK7575-100A	100	75		23	1.5
FPAK (SOT226)	BUK7E5R2-100E	100	5.2		120	0.43

For the most current product information go to www.nxp.com/mosfets (updated daily!)

Quick learning videos

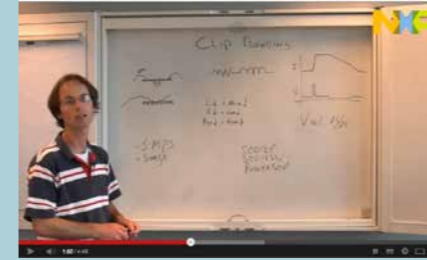

Introduction to clip-bonding technology
www.nxp.com/quicklearning1



What is LFPAK?
www.nxp.com/quicklearning41




LFPAK Power-SO8 vs. DPAK
www.nxp.com/quicklearning18



NextPower Cordless MOSFETs for battery-powered tools
www.nxp.com/quicklearning28



Next Power Live! MOSFETs for HOT SWAP and Power over Ethernet
www.nxp.com/quicklearning29

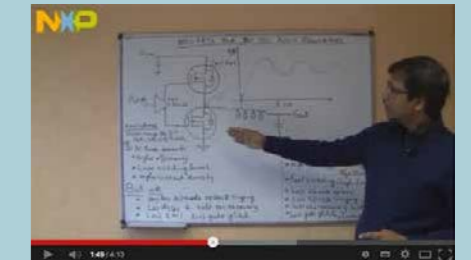


NextPowerS3 MOSFETs for DC/DC buck regulators
www.nxp.com/quicklearning32



Reverse recovery and diode leakage in SMPS
www.nxp.com/quicklearning33



Power MOSFET operation in Linear Mode
www.nxp.com/quicklearning34

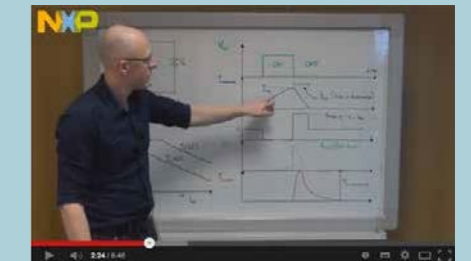

Single-shot avalanche ruggedness
www.nxp.com/quicklearning35



Power MOSFETs and thermal modelling
www.nxp.com/quicklearning43








MOSFETs for Power-over-Ethernet (PoE) PSE applications
www.nxp.com/quicklearning36

TrenchPLUS MOSFETs


TrenchPLUS is a range of standard MOSFETs with additional protection features, such as current and temperature sensing components, overvoltage clamps, and gate-protection (ESD) diodes. The system microcontroller can use data gathered from these

sensors to implement cost-effective protection features, thus eliminating the need to design with protected power devices. All the standard products listed below offer one or more "PLUS" features. Custom versions can be developed for high-volume applications.


V_{DS} (V)	$R_{DS(on)}$ (max) @ 10 V (m Ω)	$R_{DS(on)}$ (max) @ 5 V (m Ω)	I_D (max) @ 25 °C (A)	Temperature sensing	Current sensing	Gate source clamps	Gate drain clamps	Gate resistor	Surface-mount package		Leaded package	
									7-pin D ² PAK (SOT427)	5-pin D ² PAK (SOT426)	TO220AB (SOT78C)	5-pin TO220 (SOT263B-01)
												
34	6		75			•	•	•			BUK7L06-34ARC	
34	11		75			•	•	•			BUK7L11-34ARC	
40	4.1		75	•						BUK714R1-40BT		
40	5		75		•	•				BUK7105-40AIE		BUK7905-40AIE
40	5		75	•		•				BUK7105-40ATE		BUK7905-40ATE
40	5		75									BUK7905-40AI
40	6		75	•	•	•			BUK7C06-40AITE			

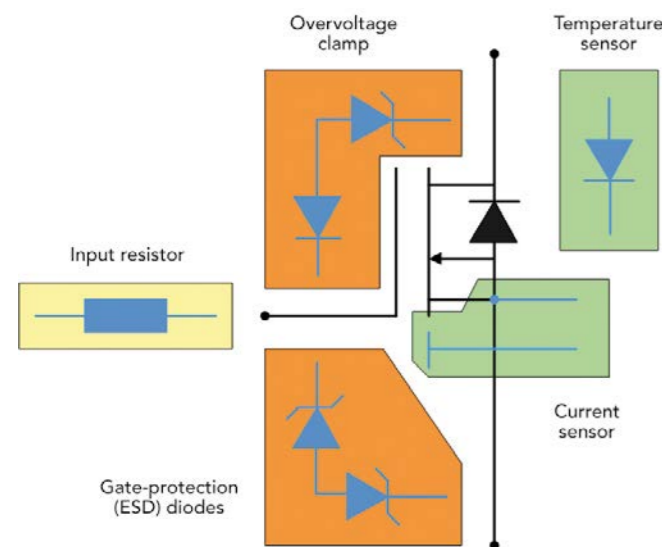

TrenchPLUS MOSFETs

V_{DS} (V)	$R_{DS(on)}$ (max) @ 10 V (m Ω)	$R_{DS(on)}$ (max) @ 5 V (m Ω)	I_D (max) @ 25 °C (A)	Temperature sensing	Current sensing	Gate source clamps	Gate drain clamps	Gate resistor	Surface-mount package		Leaded package	
									7-pin D ² PAK (SOT427)	5-pin D ² PAK (SOT426)	TO220AB (SOT78C)	5-pin TO220 (SOT263B-01)
												
40	6.6	7	75	•		•	•				BUK9107-40ATC	BUK9907-40ATC
40	8		75	•		•	•				BUK7107-40ATC	BUK7907-40ATC
40	8		75		•	•					BUK7108-40AIE	BUK7908-40AIE
55	6.6	7	75	•		•					BUK9107-55ATE	
55	7		75		•	•					BUK7107-55AIE	BUK7907-55AIE
55	7		75	•		•					BUK7107-55ATE	BUK7907-55ATE
55	8		75	•	•	•				BUK7C08-55AITE		
55	9	10	75	•	•						BUK9C10-55BIT	
75	9		75		•	•					BUK7109-75AIE	BUK7909-75AIE
75	9		75	•		•					BUK7109-75ATE	BUK7909-75ATE
75	10		75	•	•	•					BUK7C10-75AITE	

Automotive TrenchPLUS part numbering

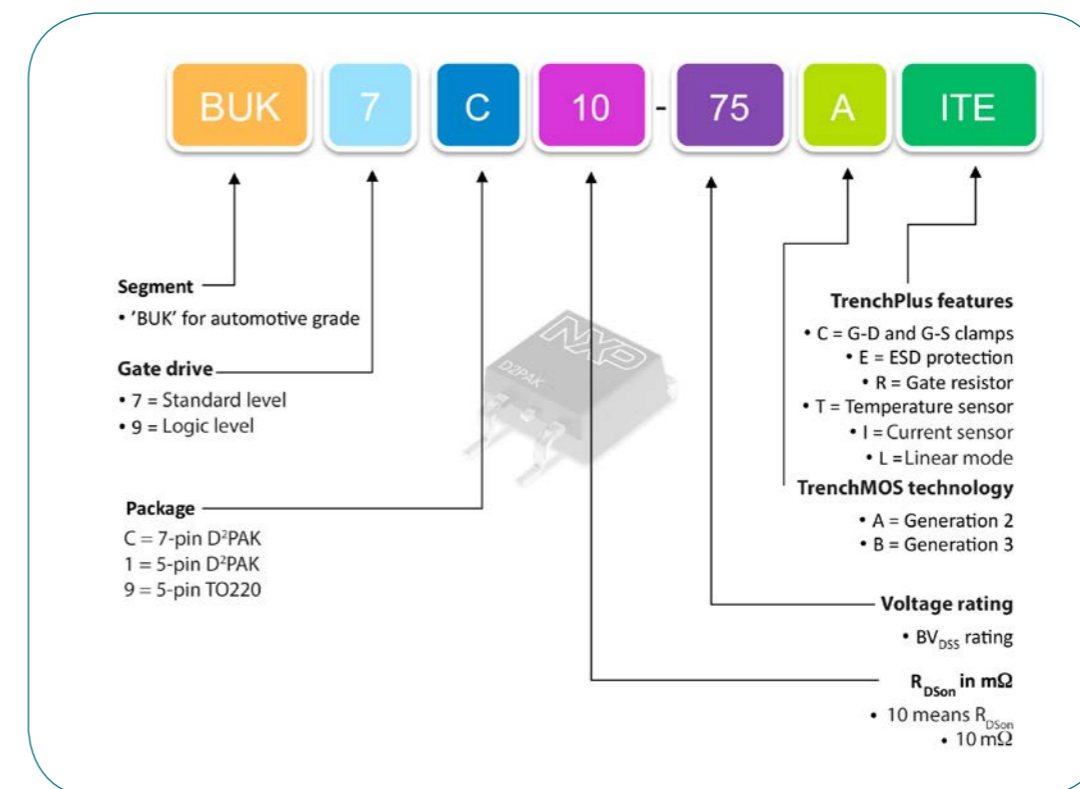

The next generation of packaging

DFN / DSN packages – high performance on a smaller footprint

100% solderable side pads

- ▶ Improved electro-thermal behaviour
- ▶ For visual solder inspection

Heat sink at die pad

- ▶ For high power on a small footprint
- ▶ Enabling smaller designs

Smallest packages

- ▶ Outline down to 0.4 x 0.2 mm
- ▶ Height down to 0.12 mm
- ▶ For ultra-compact and slim designs

True power packages for smart efficiency – with solid wireless-clip design

The miniaturization of power


- ▶ Only 1 mm in height
- ▶ Excellent electro-thermal behavior
- ▶ For high-temperature use (175 °C)

FlatPower: CFP15 (SOT1289) / CFP5 (SOD128) / CFP3 (SOD123W)

- ▶ Same performance as SMA / SMB on a much smaller footprint

LFPACK56/56D (SOT669 / SOT1205)

- ▶ Same performance as DPAK, on a much smaller footprint

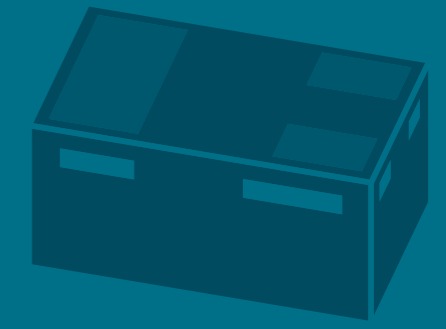

Packages

Package details and packing methods	132
Package details and packing methods SMD	132
Package details and packing methods WLCSP	135
Packing details glass diodes, single ended and through hole packages	136
Package cross reference	137
Package cross reference list	137
Package cross reference matrix	141
Packing methods	143
Tape and reel pack for SMD and WLCSP packages	143
Product orientation (tape and reel pack)	144
Minimized outline drawings and reflow soldering footprint	146








Package details and packing methods SMD – Part 3

Pins	Package details				Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing methods																									
	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package				Packing quantity and ordering code (12NC ending)																									
								500	800	1000	1400	1500	2000	2500	3000	4000	4500	5000	6000	8000	9000	10000											
8	LFPK33 (SOT1210)	3.3 x 3.3 x 0.85	-		8 mm pitch, 12 mm tape and reel	180 x 12						x																					
	DFN1714-8 (SOT1166)	1.7 x 1.35 x 0.52	0.4		4 mm pitch, 8 mm tape and reel	180 x 8																											
					4 mm pitch, 8 mm tape and reel	180 x 8																											
	DFN1714U-8 (SOT983)	1.7 x 1.35 x 0.48	0.4		4 mm pitch, 8 mm tape and reel	180 x 8																											
	SOT96 (S08)	4.9 x 3.9 x 1.75	1.27		8 mm pitch, 12 mm tape and reel	180 x 12																											
8 mm pitch, 12 mm tape and reel					330 x 12																												
8 mm pitch, 12 mm tape and reel					331 x 12																												
LFPK56D (SOT1205)	4.9 x 4.45 x 1.0	1.27		8 mm pitch, 12 mm tape and reel	180 x 12																												
9	DFN2110-9 (SOT1178)	2.1 x 1.0 x 0.48	0.4		4 mm pitch, 8 mm tape and reel	180 x 8																											
	DFN2520-9 (SOT1333)	2.5 x 2.0 x 0.48	0.5		4 mm pitch, 8 mm tape and reel	-																											
10	DFN2510-10 (SOT1165)	2.5 x 1.0 x 0.48	0.5		4 mm pitch, 8 mm tape and reel	180 x 8																											
	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48	0.5		4 mm pitch, 8 mm tape and reel	180 x 8																											
12	DFN2514-12 (SOT1167)	2.5 x 1.35 x 0.53	0.4		4 mm pitch, 8 mm tape and reel	180 x 8																											
	DFN2521-12 (SOT 1156)	2.5 x 2.1 x 0.48	0.4		4 mm pitch, 8 mm tape and reel	180 x 8																											
14	DFN4020-14 (SOT1334)	4.0 x 2.0 x 0.48	0.5		4 mm pitch, 12 mm tape and reel	180 x 12																											
	DFN3312-16 (SOT 1159)	3.3 x 1.2 x 0.48	0.4		4 mm pitch, 12 mm tape and reel	180 x 12																											
	DFN3314-16 (SOT1168)	3.3 x 1.35 x 0.53	0.4		4 mm pitch, 8 mm tape and reel	180 x 8																											
	SOT519 (SSOP16)	4.9 x 3.9 x 1.73	0.635		8 mm pitch, 12 mm tape and reel	330 x 12																											
20	SOT360 (TSSOP20)	6.5 x 4.4 x 1.1	0.65		12 mm pitch, 16 mm tape and reel	330 x 16																											
32	DFN5050-32 (SOT617)	5.0 x 5.0 x 1.0	0.5		8 mm pitch, 12 mm tape and reel	330 x 12																											
					8 mm pitch, 12 mm tape and reel	330 x 12																											

Package details and packing methods WLCSP

Basic Type	Length x width x height	# of balls	Pitch	Package	Package name
IP3319CX6	1.34 x 0.95 x 0.57	6	0.4		WLCSP6
IP4049CX5	1.28 x 0.91 x 0.65	5	0.5		WLCSP5
IP4340CX15	1.56 x 1.56 x 0.47	15	0.4		WLCSP15
IP4369CX4	0.76 x 0.76 x 0.5	4	0.4		WLCSP4
PEMI6CSP-RW	2.36 x 1.05 x 0.61	15	0.4		WLCSP15
PEMI8CSP-RW-P	3.16 x 1.05 x 0.61	20	0.4		WLCSP20
PMCM440VNE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM4401VNE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM650VNE	1.48 x 0.98 x 0.35	6	0.5		WLCSP6
PMCM440VPE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM4401VPE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM650VPE	1.48 x 0.98 x 0.35	6	0.5		WLCSP6

Packing details glass diodes, single ended and through hole packages

Pins/leads	Package	Packing method and tape/reel/tube dimensions	Package	Ordering code (12 NC ending)	Packing quantity	
2	SOD27	26 mm tape ammo pack, axial		-143	5000 pcs	
		52 mm tape ammo pack, axial		-133	10000 pcs	
		52 mm reel pack, axial		-113	10000 pcs	
	SOD66	52 mm tape ammo pack, axial		-133	10000 pcs	
		52 mm reel pack, axial		-113	10000 pcs	
	SOD68	26 mm tape ammo pack, axial		-143	5000 pcs	
		52 mm reel pack, axial		-113	10000 pcs	
		52 mm tape ammo pack, axial		-133	10000 pcs	
	3	SOT78 (TO-220)	Rail packing, 50 pcs/tube, tube length = 520 mm		-127	20 tubes x 50 pcs
		SOT186A (TO-220F)	Rail packing, 50 pcs/tube, tube length = 520 mm		-127	20 tubes x 50 pcs
		I2PAK (SOT226)	Rail packing, 50 pcs/tube, tube length = 520 mm		-127	20 tubes x 50 pcs
	5	SOT263B-1	Rail packing		-127	20 tubes x 50 pcs

Package cross reference list – Part I

Type	Competitor	NXP	Pins/Leads	Type	Competitor	NXP	Pins/Leads
μQFN-10L	ST	DFN2510A-10 (SOT1176)	10	FM8	Toshiba	SOT96	8
μQFN-10L	ST	DFN2520-9 (SOT1333)	9	FS6*	Toshiba	DFN1010B-6 (SOT1216)	6
μQFN-2L	ST	DFN1006-2 (SOD882)	2	GMD2	Rohm	DSN0603-2 (SOD962)	2
6 Lead DFN	ON Semi	DFN2020-6 (SOT1118)	6	HUML2020L8 (Dual)	Rohm	DFN2020-6 (SOT1118)	6
CL2	Toshiba	DSN0402-2 (SOD992)	2	HUML2020L8 (Single)	Rohm	DFN2020MD-6 (SOT1220)	6
CLP0603	Vishay	DSN0603-2 (SOD962)	2	KMD2	Rohm	DFN1608D-2 (SOD1608)	2
CMAK/ CMPAK	Renesas	SOT323	3	LDPAK(S)-(1)	Renesas	D ² PAK (SOT404)	3
CMPAK/ CMAK	Renesas	SOT323	3	LFAK	Renesas	LFAK (SOT669)	5
CMPAK-5(T)	Renesas	SOT353	5	LG A 1.0 x 0.6mm	Texas Instruments	DFN1006B-3 (SOT883B)	3
CMPAK-6	Renesas	SOT363	6	LLD	Renesas	SOD80C	2
CP4	Toshiba	SOT143B	4	LLDS	Rohm	SOD80C	2
CS6	Toshiba	DFN1010-6 (SOT891)	6	LLP1006-2L	Vishay	DFN1006-2 (SOD882)	2
CST3	Toshiba	DFN1006-3 (SOT883)	3	LLP1006-2L	Vishay	DFN1006D-2 (SOD882D)	2
CST3	Toshiba	DFN1006B-3 (SOT883B)	3	LLP1006-2M	Vishay	DFN1006-2 (SOD882)	2
CTS2 (fsc)	Toshiba	DFN1006-2 (SOD882)	2	LLP1006-2M	Vishay	DFN1006D-2 (SOD882D)	2
CTS2 (fsc)	Toshiba	DFN1006D-2 (SOD882D)	2	LLP75-7L	Vishay	DFN1616-6 (SOT1189)	6
D ² PAK	ON Semi	D ² PAK (SOT404)	3	LPDS/LPTS	Rohm	D ² PAK (SOT404)	3
D ² PAK	Vishay	D ² PAK (SOT404)	3	LPTS/LPDS	Rohm	D ² PAK (SOT404)	3
D ² PAK 3	ON Semi	D ² PAK (SOT404)	3	M-Flat	Toshiba	SOD128	2
D ² PAK*	Diodes Inc.	D ² PAK (SOT404)	3	Micro 3	Int. Rectifier	SOT23	3
DFN1006-3	Diodes Inc.	DFN1006-3 (SOT883)	3	Micro 6	Int. Rectifier	SOT457	6
DFN1006H4-3	Diodes Inc.	DFN1006-3 (SOT883)	3	Micro FOOT 0.8 x 0.8*	Vishay	DFN1010D-3 (SOT1215)	3
DFN1411*	Diodes Inc.	DFN1010D-3 (SOT1215)	3	Micro FOOT 1 x 1.2*	Vishay	DFN1010D-3 (SOT1215)	3
DFN2	ST	DSN0603-2 (SOD962)	2	Micro FOOT 1 x 1.5*	Vishay	DFN1010D-3 (SOT1215)	3
DPK	ON Semi	DPK (SOT428)	3	Micro FOOT 1.6 x 1.6*	Vishay	DFN2020MD-6 (SOT1220)	6
DS014	Infineon	SOT 108	14	Micro FOOT 1 x 1*	Vishay	DFN1010D-3 (SOT1215)	3
DSN2, 0.6 x 0.3	ON Semi	DSN0603-2 (SOD962)	2	Micro FOOT*	Vishay	DFN2020MD-6 (SOT1220)	6
DSN2, 0.4 x 0.2	ON Semi	DSN0402-2 (SOD992)	2	MicroFET	Fairchild	DFN2020MD-6 (SOT1220)	6
DSN2, 1.0 x 0.6	ON Semi	DSN1006-2 (SOD993)	2	MicroFET 1.6 x 1.6*	Fairchild	DFN2020MD-6 (SOT1220)	6
DSN2, 1.6 x 0.8	ON Semi	DFN1608D-2 (SOD1608)	2	MiniMelf	Diodes Inc.	SOD80C	2
DSN2, 1.0 x 0.6	ON Semi	DFN1006D-2 (SOD882D)	2	MiniMelf	ST	SOD80C	2
DSN2, 1.6 x 0.8	ON Semi	DFN1608D-2 (SOD1608)	2	MiniMelf	Vishay	SOD80C	2
EMD2	Rohm	SOD523	2	MP6	Renesas	DSN0603-2 (SOD962)	2
EMD3/EMT3	Rohm	DFN1006-3 (SOT883)	3	MPAK	Renesas	SOT23	3
EMD5/EMT5	Rohm	SOT665	5	MPAK	Renesas	SOT23	3
EMD6/EMT6/WEMT6	Rohm	SOT666	6	MPAK-4R	Renesas	SOT143B	4
EMT3	Rohm	DFN1006-3 (SOT883)	3	MPT3	Rohm	SOT89	3
EMT3/EMD3	Rohm	DFN1006-3 (SOT883)	3	PG-TD SON-8	Infineon	LFAK (SOT669)	5
EMT3F*	Rohm	DFN1006-3 (SOT883)	3	PMDT	Rohm	SOD128	2
EMT5*	Rohm	SOT666	6	PMDU	Rohm	SOD123W	2
EMT5/EMD5	Rohm	SOT665	5	PowerDI123	Diodes Inc.	SOD123F	2
EMT6	Rohm	SOT666	6	PowerDI123	Diodes Inc.	SOD123W	2
EMT6/EMD6/WEMT6	Rohm	SOT666	6	PowerDI323	Diodes Inc.	SOD323F	2
ES6	Toshiba	SOT666	6	PowerDi5	Diodes Inc.	CFP15 (SOT1289)	3
ES6 ESV	Toshiba	SOT666	6	PowerFLAT (6 x 5)	ST	LFAK (SOT669)	5
ESC/TESC	Toshiba	SOD523	2	PowerFLAT (6 x 5)	ST	LFAK56D (SOT1205)	5
ESM	Toshiba	DFN1006-3 (SOT883)	3	PowerPAK SC-70	Vishay	DFN2020-6 (SOT1118)	6
ESV	Toshiba	SOT665	5	PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
ESV	Toshiba	SOT666	6	PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6

Types with * show footprint compability only

Package cross reference list – Part 2

Type	Competitor	NXP	Pins/Leads	Type	Competitor	NXP	Pins/Leads
PowerPAK SC706L	Vishay	DFN2020-3 (SOT1061)	3	SLP1610N2	Semtech	DFN1608D-2 (SOD1608)	2
PowerPak SC-70-6L	Vishay	DFN2020-6 (SOT1118)	6	SLP1610P4	Semtech	DFN2510A-10 (SOT1176)	10
PowerPAK SC-75*	Vishay	DFN2020MD-6 (SOT1220)	6	SLP1610P4	Semtech	DFN2520-9 (SOT1333)	9
PowerPak SC-75-6L*	Vishay	DFN2020MD-6 (SOT1220)	6	SLP1616P6	Semtech	DFN1616-6 (SOT1189)	6
PowerPAK SO-8	Vishay	LPAK (SOT669)	5	SLP1713P8	Semtech	DFN1714-8 (SOT1166)	8
PW-Mini	Toshiba	SOT89	3	SLP1713P8	Semtech	DFN1714U-8 (SOT983)	8
S08	Vishay	SOT96	8	SLP2010P8T	Semtech	DFN2110-9 (SOT1178)	9
SC2	Toshiba	DSN0603-2 (SOD962)	2	SLP2513P12	Semtech	DFN2514-12 (SOT1167)	12
SC59	Diodes Inc.	SOT23	3	SLP3313P16	Semtech	DFN3314-16 (SOT1168)	16
SC70	ON Semi	SOT323	3	SM6 VS-6	Toshiba	SOT457	6
SC-70	ON Semi	SOT323	3	SMA flat	ST	SOD128	2
SC-70, 3 leads	Vishay	SOT323	3	SMD TO-263	Renesas	D*PAK (SOT404)	3
SC70-3	Vishay	SOT323	3	SMD0402	Rohm	DSN0402-2 (SOD992)	2
SC70-3	AOS	SOT323	3	SMD6/SMT6	Rohm	SOT457	6
SC70-5L	Semtech	SOT353	5	SMD6/SMZ6	Rohm	SOT457	6
SC70-6	Vishay	SOT363	6	SMFPAK-6	Renesas	SOT666	6
SC70-6	AOS	SOT363	6	S-Mini	Toshiba	SOT23	3
SC70-6	Fairchild	SOT363	6	S-Mini TSM	Toshiba	SOT23	3
SC70-6L	Semtech	SOT363	6	SMPAK	Renesas	DFN1006-3 (SOT883)	3
SC74 TSOP6	Infineon	SOT457	6	SMPC TO-277A	Vishay	CFP15 (SOT1289)	3
SC-74 TSOP-6	ON Semi	SOT457	6	SMT3	Rohm	SOT23	3
SC75	Infineon	DFN1006-3 (SOT883)	3	SMT5*	Rohm	SOT457	6
SC75	ON Semi	DFN1006-3 (SOT883)	3	SMT6	Rohm	SOT457	6
SC-75	ON Semi	DFN1006-3 (SOT883)	3	SMZ6/SMD6	Rohm	SOT457	6
SC-75	Semtech	DFN1006-3 (SOT883)	3	SO-8 FL	ON Semi	LPAK (SOT669)	5
SC75A	Vishay	DFN1006-3 (SOT883)	3	SOD-123	ST	SOD123F	2
SC-75A	Vishay	DFN1006-3 (SOT883)	3	SOD-123-FL	ON Semi	SOD123F	2
SC79	Infineon	SOD523	2	SOD-123-FL	ON Semi	SOD123W	2
SC-88	ON Semi	SOT363	6	SOD323	Infineon	SOD323	2
SC88/SC 7 0-6/SOT 363 6 LEAD	ON Semi	SOT363	6	SOD323	Vishay	SOD323	2
SC-88A	ON Semi	SOT353	5	SOD323	Semtech	SOD323	2
SC89	Fairchild	SOT666	6	SOD-323	ON Semi	SOD323	2
SC-89	Semtech	SOT666	6	SOD-323	Diodes Inc.	SOD323	2
SC89-3	Vishay	DFN1006-3 (SOT883)	3	SOD-323	ST	SOD323	2
SC89-3	ON Semi	DFN1006-3 (SOT883)	3	SOD523	Diodes Inc.	SOD523	2
SC89-3	Fairchild	DFN1006-3 (SOT883)	3	SOD523	Vishay	SOD523	2
SC89-6	Vishay	SOT666	6	SOD523	Semtech	SOD523	2
SC89-6	AOS	SOT666	6	SOD-523	ON Semi	SOD523	2
SC89-6	Fairchild	SOT666	6	SOD-523	ST	SOD523	2
SC89-6lead	Vishay	SOT666	6	SOD882	ST	DFN1006-2 (SOD882)	2
S-Flat	Toshiba	SOD123F	2	SOD882T	ST	DFN1006D-2 (SOD882D)	2
S-Flat	Toshiba	SOD123W	2	SOD923-2*	ON Semi	DFN1006-2 (SOD882)	2
SLP0402P2X3	Semtech	DSN0402-2 (SOD992)	2	SOIC-8 NB	ON Semi	SOT96	8
SLP1006P2	Semtech	DFN1006-2 (SOD882)	2	SON 2x2	Texas Instruments	DFN2020MD-6 (SOT1220)	6
SLP1006P2T	Semtech	DFN1006D-2 (SOD882D)	2	SON 3x3*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
SLP1006P3	Semtech	DFN1006-3 (SOT883)	3	SOP8	Rohm	SOT96	8
SLP1006P3T	Semtech	DFN1006B-3 (SOT883B)	3	SOP-8	Renesas	SOT96	8
SLP1510N6	Semtech	DFN1410-6 (SOT886)	6	SOPH	Rohm	SOT 108	14
				SOT 143	Infineon	SOT143B	4

Types with * show footprint compability only

Package cross reference list – Part 3

Type	Competitor	NXP	Pins/Leads	Type	Competitor	NXP	Pins/Leads
SOT063*	ON Semi	DFN101 OB-6 (SOT1216)	6	SOT666	Infineon	SOT666	6
SOT-143	Semtech	SOT143B	4	SOT723*	ON Semi	DFN1010D-3 (SOT1215)	3
SOT-143	Diodes Inc.	SOT143B	4	SOT723-3*	ON Semi	DFN1010D-3 (SOT1215)	3
SOT223	Vishay	SOT223	4	SOT89	Infineon	SOT89	3
SOT223	Infineon	SOT223	4	SOT89	Diodes Inc.	SOT89	3
SOT223	Fairchild	SOT223	4	SOT-89	ON Semi	SOT89	3
SOT223	ON Semi	SOT223	4	SOT89-3L	Diodes Inc.	SOT89	3
SOT223	Diodes Inc.	SOT223	4	SOT963	ON Semi	DFN1010-6 (SOT891)	6
SOT-223	ON Semi	SOT223	4	SOT963*	Diodes Inc.	DFN1010B-6 (SOT1216)	6
SOT-223	Diodes Inc.	SOT223	4	SRP-F	Renesas	SOD123W	2
SOT23	Infineon	SOT23	3	SS CSP2	Toshiba	DFN1006-3 (SOT883)	3
SOT23	ST	SOT23	3	SSD3/SST3	Rohm	SOT23	3
SOT23	Vishay	SOT23	3	SSM	Toshiba	DFN1006-3 (SOT883)	3
SOT23	Semtech	SOT23	3	SSOT3	Fairchild	SOT23	3
SOT23	Diodes Inc.	SOT23	3	SSOT6	Fairchild	SOT457	6
SOT23	AOS	SOT23	3	SSOT6 FLMP	Fairchild	SOT457	6
SOT23	ON Semi	SOT23	3	SST3	Rohm	SOT23	3
SOT-23	ON Semi	SOT23	3	SST3/SSD3	Rohm	SOT23	3
SOT-23	Diodes Inc.	SOT23	3	ST01005	STM	DSN0402-2 (SOD992)	2
SOT23-3	Diodes Inc.	SOT23	3	Stmite flat	ST	SOD123W	2
SOT23-3	AOS	SOT23	3	T0263	Diodes Inc.	D*PAK(SOT404)	3
SOT23-3	ON Semi	SOT23	3	T0263-3	Infineon	D*PAK (SOT404)	3
SOT23-5	AOS	SOT457	6	Thin PowerPAK SC70	Vishay	DFN2020MD-6 (SOT1220)	6
SOT23-5	Diodes Inc.	SOT457	6	Thin PowerPAK SC-70	Vishay	DFN2020-6 (SOT1118)	6
SOT23-6	Diodes Inc.	SOT457	6	Thin PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
SOT23-6	ST	SOT457	6	Thin PowerPAK SC75*	Vishay	DFN2020MD-6 (SOT1220)	6
SOT23-6	Diodes Inc.	SOT457	6	TO-220S	Renesas	D*PAK (SOT404)	3
SOT23-6L	Semtech	SOT457	6	TO-220SM	Toshiba	D*PAK (SOT404)	3
SOT23F	Toshiba	SOT23	3	TO-252 (MP-3ZK)	Renesas	DPAK (SOT428)	3
SOT23F	Diodes Inc.	SOT23	3	TO-252 reverse, TO-252	Vishay	DPAK (SOT428)	3
SOT26	Diodes Inc.	SOT457	6	TO-252, TO-252 reverse	Vishay	DPAK (SOT428)	3
SOT323	Infineon	SOT323	3	TO-252-3/-3-23	Infineon	DPAK (SOT428)	3
SOT323	Diodes Inc.	SOT323	3	TO-263 3-lead	Vishay	D*PAK (SOT404)	3
SOT323	Fairchild	SOT323	3	TO-263AB	Vishay	D*PAK (SOT404)	3
SOT-323	Diodes Inc.	SOT323	3	TSLP-2-1	Infineon	DFN1006-2 (SOD882)	2
SOT-323	ST	SOT323	3	TSLP-2-7/-17	Infineon	DFN1006D-2 (SOD882D)	2
SOT353	Diodes Inc.	SOT353	5	TSLP-3-1, -15	Infineon	DFN1006B-3 (SOT883B)	3
SOT353	Vishay	SOT353	5	TSLP-3-4	Infineon	DFN1006-3 (SOT883)	3
SOT353	Diodes Inc.	SOT363	6	TSLP-9-1	Infineon	DFN2510A-10 (SOT 1176)	10
SOT363	Infineon	SOT363	6	TSLP-9-1	Infineon	DFN2520-9 (SOT1333)	9
SOT363	Diodes Inc.	SOT363	6	TSMT5*	Rohm	SOT457	6
SOT-363	Diodes Inc.	SOT363	6	TSMT6	Rohm	SOT457	6
SOTS23	Diodes Inc.	DFN1006-3 (SOT883)	3	TSNP-2-2	Infineon	DFN1608D-2 (SOD 1608)	2
SOTS23F	Fairchild	DFN1006-3 (SOT883)	3	TSOP6	Vishay	SOT457	6
SOT-553	ON Semi	SOT665	5	TSOP6	AOS	SOT457	6
SOT563	Diodes Inc.	SOT666	6	TSOP6	ON Semi	SOT457	6
SOT-563	ON Semi	SOT666	6	TSOP-6	Renesas	SOT457	6
SOTS63-6	ON Semi	SOT666	6	TSOP-6/ TSOP6	Vishay	SOT457	6
SOTS63F	Fairchild	SOT666	6	TSSLP-2-1	Infineon	DSN0603-2 (SOD962)	2

Types with * show footprint compability only

Package cross reference list – Part 4

Type	Competitor	NXP	Pins/Leads
TSSOP20	Toshiba	SOT360	20
TSSOP20	Renesas	SOT360	20
TSST8*	Rohm	DFN2020MD-6 (SOT1220)	6
TUMT3	Rohm	SOT323	3
TUMT5*	Rohm	DFN2020-6 (SOT1118)	6
TUMT6*	Rohm	DFN2020-6 (SOT1118)	6
UDFN 1.6 x 1.6	ON Semi	DFN1616-6 (SOT1189)	6
UDFN 1.7 x 1.35, 0.4P	ON Semi	DFN1714U-8 (SOT983)	8
UDFN 10 2.5 x 1, 0.5P	ON Semi	DFN2520-9 (SOT1333)	9
UDFN 10 2.5 x 2	ON Semi	DFN2520-9 (SOT1333)	9
UDFN10 2.5 x 1, 0.5P	ON Semi	DFN2510A-10 (SOT1176)	10
UDFN12, 2.5 x 1.35, 0.4P	ON Semi	DFN2514-12 (SOT1167)	12
U-DFN2020-3 Type B 2.0 x 2.0 x 0.6	Diodes Inc.	DFN2020-3 (SOT1061)	3
U-DFN2020-6	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
UDFN2020-6 Type B	Diodes Inc.	DFN2020-6 (SOT1118)	6
UDFN2020-6 Type E	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
U-DFN2523-6*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
UDFN6	Toshiba	DFN2020-6 (SOT1118)	6
UDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
UDFN-6 WDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
UDFN6B	Toshiba	DFN2020MD-6 (SOT1220)	6
UDRN 16 4 x 2	ON Semi	DFN4020-14 (SOT1334)	14
UF6	Toshiba	SOT363	6
UF6/ USV/ US6	Toshiba	SOT363	6
UFP	Renesas	SOD523	2
UMD2	Rohm	SOD323F	2
UMD3/UMT3	Rohm	SOT323	3
UMD5/UMT5	Rohm	SOT353	5
UMD6/ UMT6	Rohm	SOT363	6
UMLP 1.6 x 1.6*	Fairchild	DFN2020MD-6 (SOT1220)	6
UMT3	Rohm	SOT323	3
UMT3F*	Rohm	SOT323	3
UMT5/ UMD5	Rohm	SOT353	5
UMT6	Rohm	SOT363	6
UMT6/ UMD6	Rohm	SOT363	6
UPAK (SOT89)	Renesas	SOT89	3
URP	Renesas	SOD323	2
US6	Toshiba	SOT363	6
US6/ UF6/ USV	Toshiba	SOT363	6
use	Toshiba	SOD323	2
US-Flat	Toshiba	SOD323F	2
USM	Toshiba	SOT323	3
USV	Toshiba	SOT353	5
USV	Toshiba	SOT363	6
USV/ US6/ UF6/	Toshiba	SOT363	6
VESM*	Toshiba	DFN1010D-3 (SOT1215)	3
VML0806*	Rohm	DFN1006B-3 (SOT883B)	3
VML1006	Rohm	DFN1006-3 (SOT883)	3

Types with * show footprint compability only

Package cross reference matrix – Part I

Pins/Leads	NXP	Industry standard names	Size (l x w x h) (mm)	P _{tot} (mW)	Package	Competitor synonyms									
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech	
2	DSN0402-2 (SOD992)		0.4 x 0.2 x 0.12			SMD0402	CL2	DSN2 0.4 x 0.2		WLL-2-2		ST01005		SLP0402P2X3	
	DSN1006-2 (SOD993)		1.0 x 0.6 x 0.3					DSN2 1.0 x 0.6							
	DSN1006U-2 (SOD995)		1.0 x 0.6 x 0.3					DSN2 1.0 x 0.6							
	DFN1006-2 (SOD882)		1.0 x 0.6 x 0.48	250		(VMN2)	CTS2 (fSC)	(SOD923-2)		TSLP-2-1	XI-DFN1006-2	SOD 882 uQFN-2L	LLP1006-2M LLP1006-2L	SLP1006P2	
	DFN1006D-2 (SOD882D)		1.0 x 0.6 x 0.37	250		(VMN2)	CTS2 (fSC)	DSN2 1.0 x 0.6		TSLP-2-7/ -17	X2-DFN1006-2	SOD882T	LLP1006-2L LLP1006-2M	SLP1006P2T	
	DFN1608D-2 (SOD1608)		1.6 x 0.8 x 0.37	780		KMD2		DSN2 1.6 x 0.8		TSNP-2-2				SLP1610N2	
	DSN0603-2 (SOD962)		0.6 x 0.3 x 0.3	525		GMD2	SC2	DSN2, X3DFN-2 WLCSP2	MP6	TSS-LP-2-1	X3-DFN0603-2	DFN2	CLP0603	SLP0603P2X3	
	SOD80C	Mini-Melf		3.5 x 1.5 x 1.5	300		LLDS		LLD		MiniMelf	MiniMelf	MiniMelf		
	SOD123F			2.6 x 1.6 x 1.1	830			S-Flat	SOD-123-FL		PowerDI123	SOD-123			
	SOD123W			2.6 x 1.7 x 1.0	900		PMDU	S-Flat	SOD-123-FL	SRP-F	PowerDI123	Stmite flat			
	SOD128			3.8 x 2.5 x 1.0	1000		PMDT	M-Flat				SMA flat			
	SOD323	SC-76		1.7 x 1.25 x 0.95	400			USC	SOD-323	URP	SOD323	SOD-323	SOD-323	SOD323	SOD323
	SOD323F	SC-90		1.7 x 1.25 x 0.7	830		UMD2	US-Flat			PowerDI323				
	SOD523	SC-79		1.2 x 0.8 x 0.6	500		EMD2	ESC/ TESC	SOD-523	UFP	SC79	SOD523	SOD-523	SOD523	SOD523
	3	CFP15 (SOT1289)		5.8 x 4.3 x 0.78	1200						PowerDi5		SMPC TO-277A		
		DFN1006-3 (SOT883)	SC-101	1.0 x 0.6 x 0.48	250		VML1006	SS CSP2	XDFN3		TSLP-3-4	X1 -DFN 1006-3		SLP1006P3	
		DFN1006B-3 (SOT883B)		1.0 x 0.6 x 0.37	250		VML1006	CST3	XDFN3		TSLP-3-1, -15	X2-DFN1006-3		SLP1006P3T	
		DFN1010D-3 (SOT1215)		1.1 x 1.0 x 0.37	325		(VMT3)	(VESM)	(SOT723)			X2-DFN1010-3			
		DFN2020-3 (SOT1061)	HU-SON3	2.0 x 2.0 x 0.62	1300					WDFN3		U-DFN2020-3 Type B 2.0 x 2.0 x 0.6		PowerPAK SC706L	
		DFN2020D-3 (SOT1061D)		2.0 x 2.0 x 0.62	1300					WDFN3		U-DFN2020-3 Type B 2.0 x 2.0 x 0.6		PowerPAK SC706L	
DPAK (SOT428)			6.6 x 6.1 x 2.3						DPAK	TO-252 (MP-3ZK)	TO-252-3/-3-2 3		TO-252, TO-252 reverse		
D2PAK (SOT404)			11.0 x 11.0 x 4.3			LPDS/ LPTS	TO-220SM	D2PAK D2PAK 3	TO-220S / SMD TO-263 LDKPAK(S)-(1)	T0263-3	T0263 (D2PAK)		TO-263 3-lead TO-263AB / D2PAK		
SOT23			2.9 x 1.3 x 1.0	250		SSD3/ SST3	S-Mini TSM	SOT-23	MPAK	SOT23	SOT-23	SOT23	SOT23	SOT23	
SOT89		SC-62	4.5 x 2.5 x 1.5	1300		MPT3	PW-Mini	SOT-89	UPAK (SOT89)	SOT89	SOT89				
SOT323	SC-70	2.0 x 1.25 x 0.95	200		UMD3/ UMT3 TUMT3	USM	SC-70	CMAK/ CMPAK	SOT323	SOT-323	SOT-323	SC-70 3 leads	SOT-323		

Types in brackets (...) show footprint compability only

Package cross reference matrix – Part 2

Pins/leads	NXP	Industry standard names	Size (l x w x h) (mm)	P _{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech
4	LFPAK56 (SOT669)	Power-S08	4.9 x 4.45 x 1.0	3000				SO-8 FL	LFPAK	PG-TD-SON-8	Power-DI5060-8	PowerFLAT (6x5)	PowerPAK SO-8	
	SOT143B		2.9 x 1.3 x 1.0	250			CP4		MPAK-4R	SOT143	SOT-143			SOT-143
	SOT223	SC-73	6.5 x 3.5 x 1.65	1700				SOT-223		SOT223	SOT-223		SOT223	
5	SOT353	SC-88 A	2.0 x 1.25 x 0.95	300		UMD5/UMT5	USV	SC-88 A	CMPAK-5C0		SOT353		SOT353	SC70-5L
	SOT665		1.6 x 1.2 x 0.55	300		EMD5/EMT5	ESV	SOT-553	VSON-5					
6	DFN1010-6 (SOT891)	x SON6	1.0 x 1.0 x 0.48				CS6	SOT963						
	DFN1010B-6 (SOT1216)		1.1 x 1.0 x 0.37	350		VMT6)	(FS6)	(SOT063)			(SOT963)			
	DFN1410-6 (SOT886)	x SON6	1.45 x 1.0 x 0.48	250										SLP1510N6
	DFN1616-6 (SOT1189)	H x SON6	1.6 x 1.6 x 0.48					UDFN 1.6 x 1.6					LLP75-/L	SLP1616P6
	DFN2020-6 (SOT1118)		2.0 x 2.0 x 0.62	1300		HU-ML2020L8 (Dual)	UDFN6	6 Lead DFN WDFN6			UDFN2020-6 Type B		PowerPAK SC-70 Thin PowerPAK SC-70	
	DFN2020D-6 (SOT1118D)		2.0 x 2.0 x 0.62	1300		HU-ML2020L8 (Dual)	UDFN6	6 Lead DFN WDFN6			UDFN2020-6 Type B		PowerPAK SC-70 Thin PowerPAK SC-70	
8	DFN2020MD-6 (SOT1220)		2.0 x 2.0 x 0.62	1250		HU-ML2020L8 (Single)	UDFN6B	UDFN-6 WDFN6			UDFN2020-6 Type E		PowerPAK SC-70 Thin PowerPAK SC-70	
	SOT363	SC-88	2.0 x 1.25 x 0.95	300		UMD6/UMT6	US6 UF6 USV	SC-88	CMPAK-6	SOT363	SOT-363		SC70-6	SC70-6L
	SOT457	SC-74	2.9 x 1.5 x 1.0	750		SMD6/SMT6	SM6 VS-6	SC-74 TSOP-6	TSOP-6	SC74 TSOP6	SOT23-6 SOT26		TSOP6 TSOP-6	SOT23-6L
	SOT666		1.6 x 1.2 x 0.55	300		EMD6/EMT6 WEMT6	ES6 ESV	SOT-563	SMFPAK-6	SOT666	SOT563		SC89-6lead	SC-89
8	LFPAK56D (SOT1205)		4.9 x 4.45 x 1.0	3000								PowerFLAT (6x5)		
	SOT96	S08	4.9 x 3.9 x 1.75	1500			SOP8	FM8	SOIC-8 NB	SOP-8			S08	
	DFN1714-8 (SOT1166)	HUSON8	1.7 x 1.35 x 0.52											SLP1713P8
9	DFN1714U-8 (SOT983)	H x SON8	1.7 x 1.35 x 0.48					UDFN 1.7 x 1.35, 0.4P						SLP1713P8
	DFN2110-9 (SOT1178)	x SON9	2.1 x 1.0 x 0.48											SLP2010P8T
10	DFN2520-9 (SOT1333)							WDFN 10 2.5 x 2 UDFN10 2.5 x 2						
	DFN2510-10 (SOT1165)	x SON10	2.5 x 1.0 x 0.48					UDFN10 2.5 x 1, 0.5P		TSLP-9-1		pQFN-10L		SLP1610P4
	DFN2510A-10 (SOT1176)	x SON10	2.5 x 1.0 x 0.48					UDFN10 2.5 x 1, 0.5P		TSLP-9-1		pQFN-10L		SLP1610P4
	DFN2626-10 (SOT1197)		2.6 x 2.6 x 0.48					UDFN10 2.6 x 2.6, 0.5P						SLP2626P10

Types in brackets (...) show footprint compatibility only

Package cross reference matrix – Part 3

Pins/leads	NXP	Industry standard names	Size (l x w x h) (mm)	P _{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech
12	DFN2512-12 (SOT1158)	H x SON12	2.5 x 1.2 x 0.48					UDFN12, 2.5 x 1.2, 0.4P						
	DFN2514-12 (SOT1167)	HU-SON12	2.5 x 1.35 x 0.53					UDFN12, 2.5 x 1.35, 0.4P						SLP2513P12
14	DFN4020-14 (SOT1334)		4.0 x 2.0 x 0.48					WDFN 16 4 x 2 UDRN 16 4 x 2						
	SOT108	S014	8.65 x 3.9 x 1.75							SOP 14			DS014	
16	DFN3312-16 (SOT1159)	H x SON16	3.3 x 1.2 x 0.48					UDFN 16, 3.5 x 1.2, 0.4P						
	DFN3314-16 (SOT1168)	HU-SON16	3.3 x 1.35 x 0.53											SLP3313P16
20	SOT360	TSSOP20	6.5 x 4.4 x 1.1									TSSOP20	TSSOP20	

Types in brackets (...) show footprint compatibility only

Tape and reel pack for SMD and WLCSF packages

Choose 10k reels for higher efficiency

- ▶ Optimized handling and production
- ▶ Reduced packaging and environmental impact
- ▶ Available for many products

Product orientation (tape and reel pack)

2 pin packages	Orientation in tape	Package	Packing 12NC ending	
			DFN1006-2 (SOD882)	315
			DFN1006D-2 (SOD882D)	315
			DFN1608D-2 (SOD1608)	315
			DSN0603-2 (SOD962)	315
			DSN0402-2 (SOD992)	315
			DSN1006-2 (SOD993)	315
			DSN1006U-2 (SOD995)	315
			DSN1608-2 (SOD963, SOD964)	315
			SOD80	115, 135
			SOD123F	115
		CFP3 (SOD123W)	115	
		CFP5 (SOD128)	115	
		SOD323	115, 135	
		SOD323F	115	
	SOD523	115, 135, 315, 335		

3 pin packages	Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending	
			SOT89	146		DFN1010D-3 (SOT1215)	147
						DFN2020-3 (SOT1061)	115, 135
						DFN2020D-3 (SOT1061D)	115, 135
						SOT89	115, 135
						SOT663	115
						CFP15 (SOT1289)	139, 146
						DPAK (SOT428)	118
						D2PAK (SOT404)	118
						SOT89	147
Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending		
		DFN1006-3 (SOT883)	315				
		DFN1006B-3 (SOT883B)	315				
		SOT23	185, 215, 235				
		SOT323	115, 135				

4 pin packages	Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending	
			LFPAK56 (SOT669)	115			
			WL CSP4	084			
Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending		
		SOT143B	215, 235				
		SOT223	115, 135				

5 pin packages	Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending	
			WL CSP5	087		SOT353	115, 135
						SOT665	115
Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending		









> 6 pin packages	Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending	
			DFN1410-6 (SOT886)	115		DFN2020-6 (SOT1118)	115
			DFN1616-6 (SOT1189)	115		DFN2020D-6 (SOT1118D)	115
			DFN2020MD-6 (SOT1220)	184		DFN2020MD-6 (SOT1220)	115
			LFPAK33 (SOT1210)	115		DFN1010B-6 (SOT1216)	147
			LFPAK56D (SOT1205)	115		SOT363	115, 135
			WL CSP6	023		SOT457	115, 135
						SOT666	115, 315
Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending		
		DFN1010-6 (SOT891)	132				
		DFN1410-6 (SOT886)	132				
		DFN2020MD-6 (SOT1220)	125				
		SOT363	125, 165				
	SOT457	125, 165					

Outline and footprint drawings

2-pin SMD packages	148
DSN0402-2 (SOD992)	148
DSN1006-2 (SOD993)	148
DSN1006U-2 (SOD995)	148
DFN1006-2 (SOD882)	148
DFN1006D-2 (SOD882D)	149
DFN1608D-2 (SOD1608)	149
DSN0603-2 (SOD962)	149
SOD80C	149
SOD123F	150
SOD123W	150
SOD128	150
SOD323 (SC-76)	150
SOD323F (SC-90)	151
SOD523 (SC-79)	151
3-pin SMD packages	151
CFP15 (SOT1289)	151
DFN1006-3 (SOT883)	151
DFN1006B-3 (SOT883B)	152
DFN1010D-3 (SOT1215)	152
DFN2020-3 (SOT1061)	152
DFN2020D-3 (SOT1061D)	152
DPAK (SOT428)	153
D ² PAK (SOT404)	153
SOT23	153
SOT89 (SC-62)	153
SOT323 (SC-70)	154
SOT663	154
4-pin SMD packages	154
LFPAK56 (SOT669)	154
SOT143B	154
SOT223 (SC-73)	155
5-pin SMD packages	155
SOT353 (SC-88A)	155
SOT665	155
6-pin SMD packages	155
DFN1010-6 (SOT891)	155
DFN1010B-6 (SOT1216)	156
DFN1410-6 (SOT886)	156
DFN1616-6 (SOT1189)	156
DFN2020-6 (SOT1118)	156
DFN2020D-6 (SOT1118D)	157
DFN2020MD-6 (SOT1220)	157
SOT363 (SC-88)	157
SOT457 (SC-74)	157
SOT666	158
7-pin SMD Packages	158
DFN2111-7 (SOT1358)	158
D2PAK-7 (SOT428)	158









8-pin SMD packages	158
DFN1714-8 (SOT1166)	158
DFN1714U-8 (SOT983)	159
SOT96 (SO8)	159
LFPAK33 (SOT1210)	159
LFPAK56D (SOT1205)	159
More than 8-pin SMD packages	160
DFN2110-9 (SOT1178)	160
DFN2510-10 (SOT1165)	160
DFN2510A-10 (SOT1176)	160
DFN2514-12 (SOT1167)	160
DFN2520-9 (SOT1333)	161
DFN2521-12 (SOT1156)	161
DFN3314-16 (SOT1168)	161
DFN4020-14 (SOT1334)	161
DFN5050-32 (SOT617)	162
SOT360 (TSSOP20)	162
SOT519 (SSOP16)	162
Glass diodes	162
SOD27 (DO-35)	162
SOD66 (DO-41)	162
SOD68 (DO-34)	162
Single-ended and through-hole packages	163
SOT78 (TO220AB)	163
SOT186A (isolated TO220AB)	163
SOT226	163
SOT263B-1	163

2-pin SMD packages

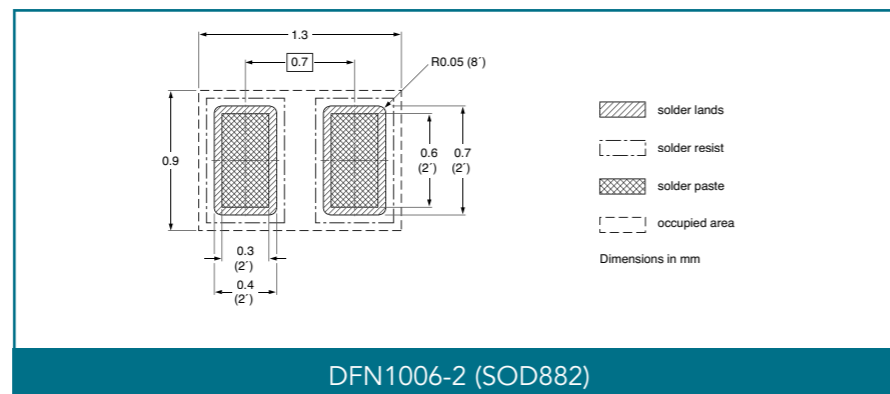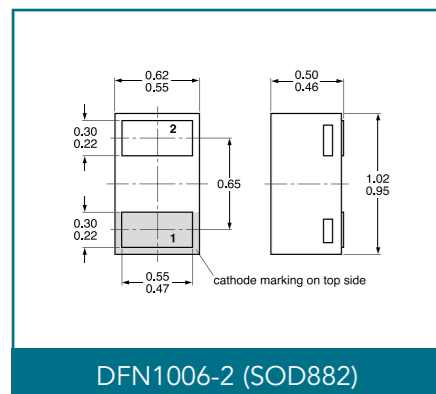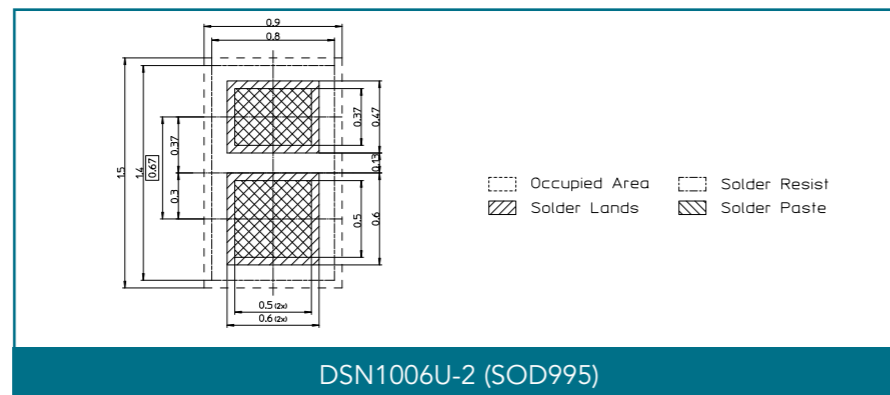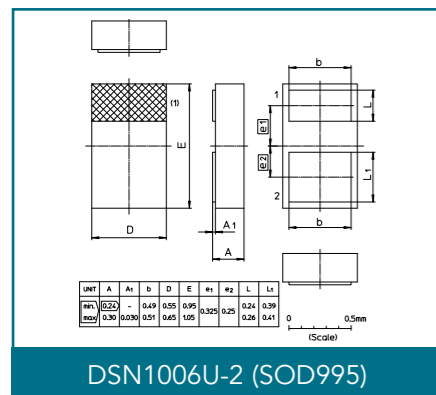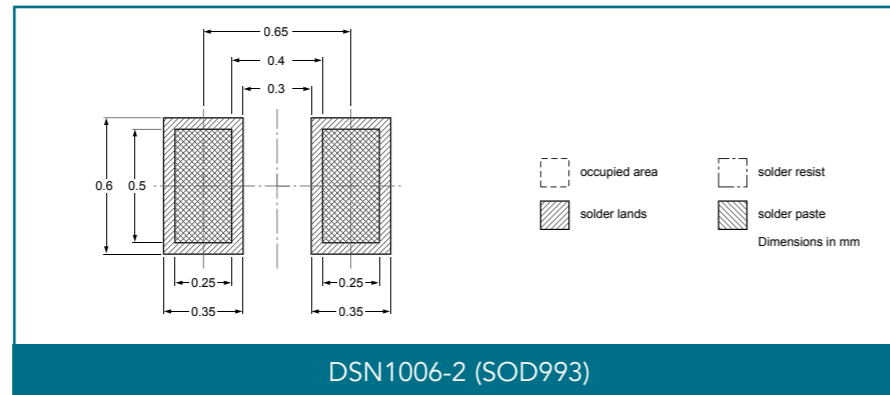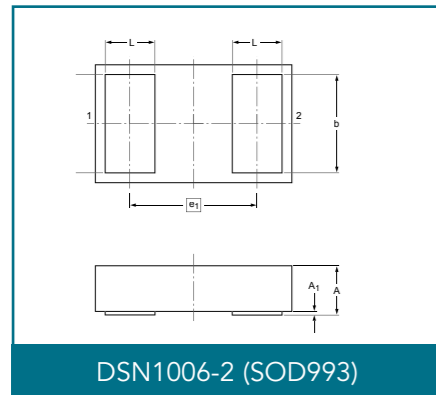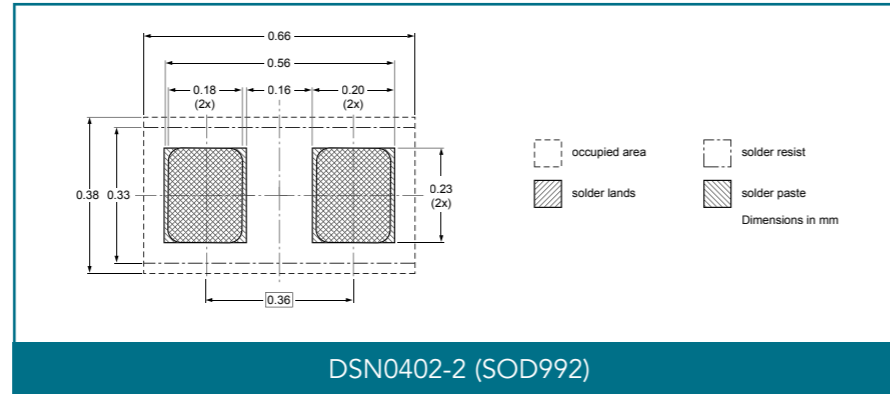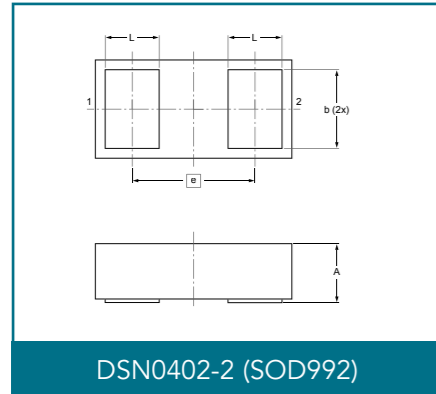


Dimensions in mm

2-pin SMD packages

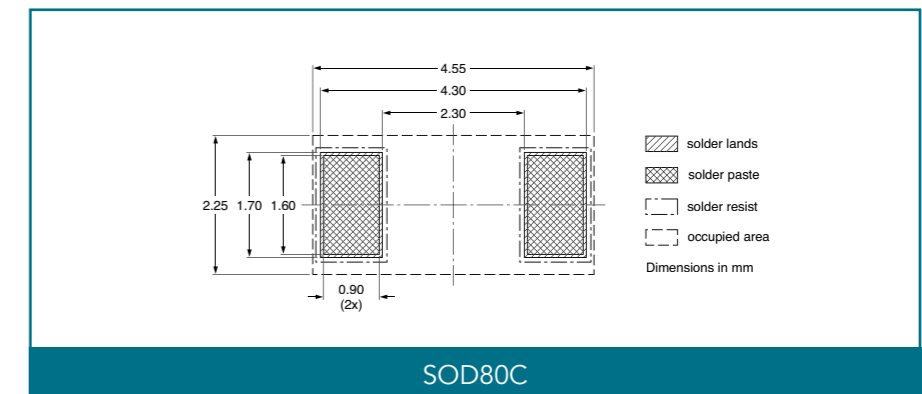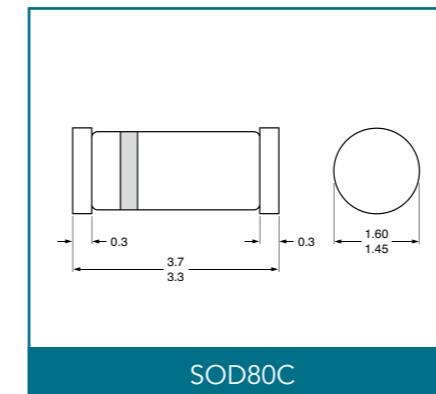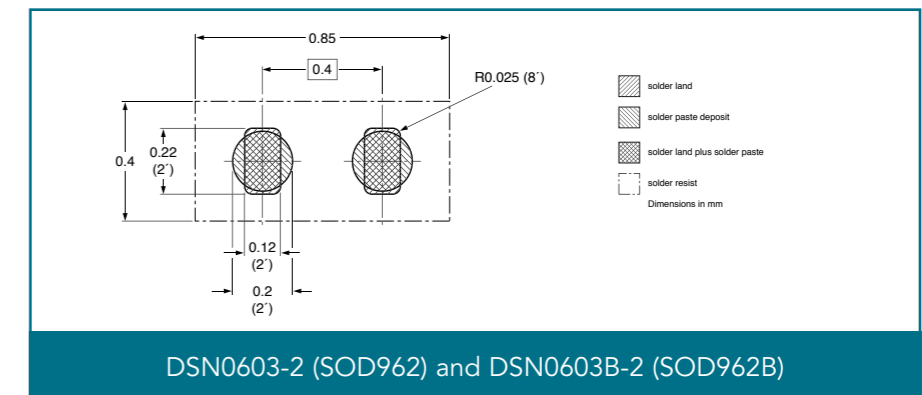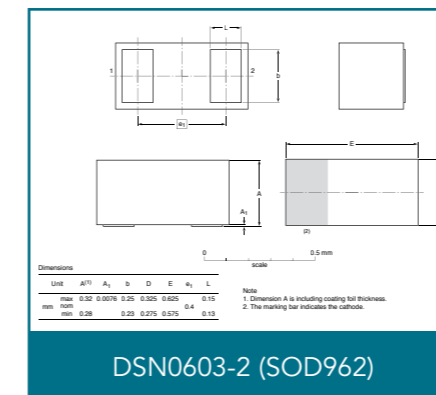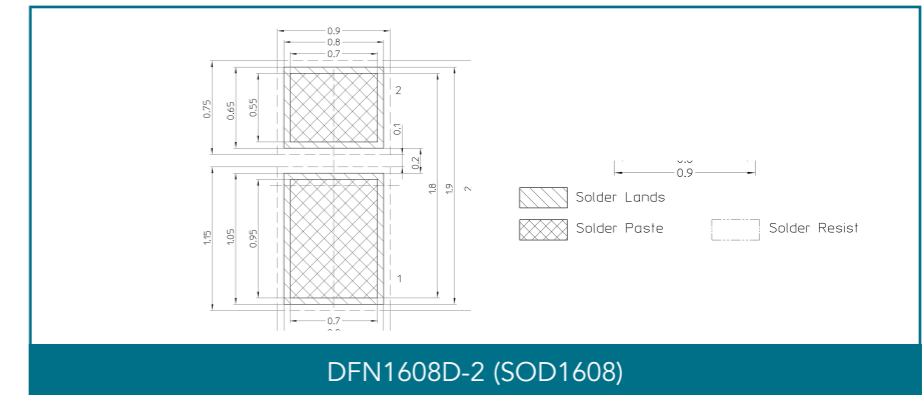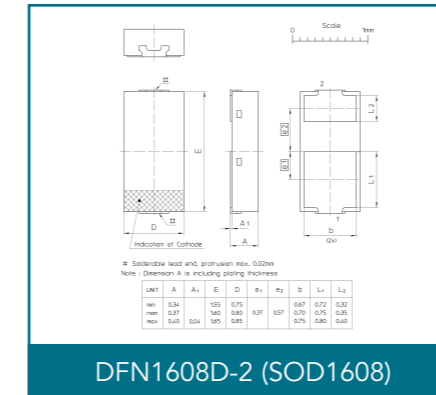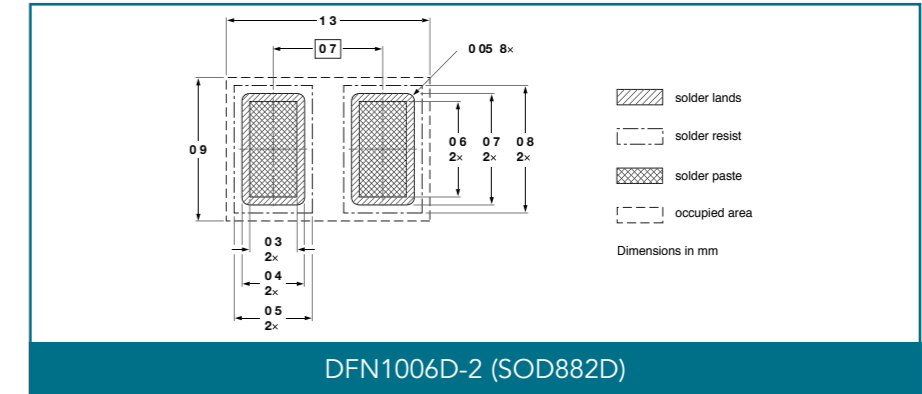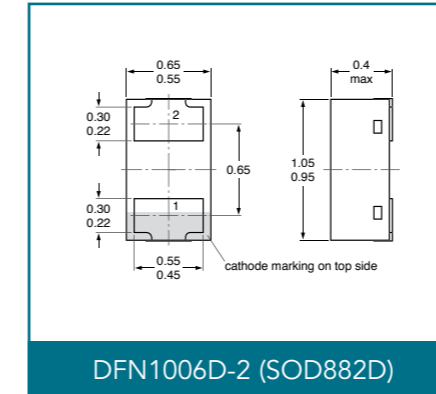


Dimensions in mm


2-pin SMD packages

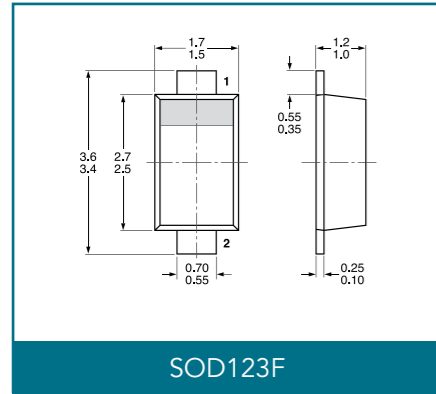


SOD123F

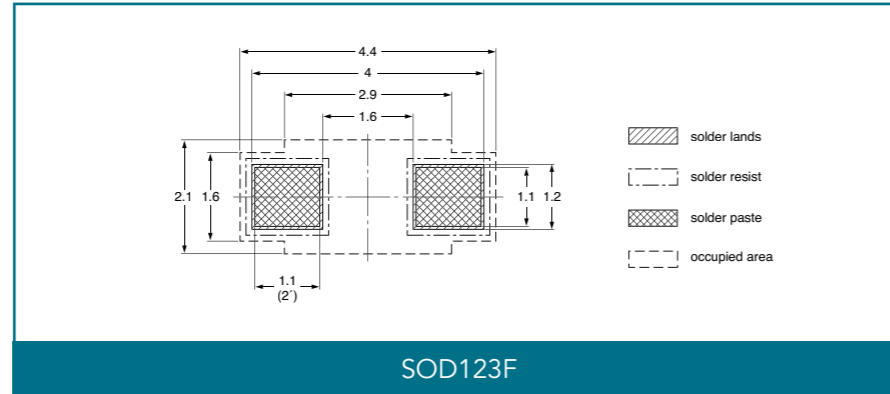


SOD123F

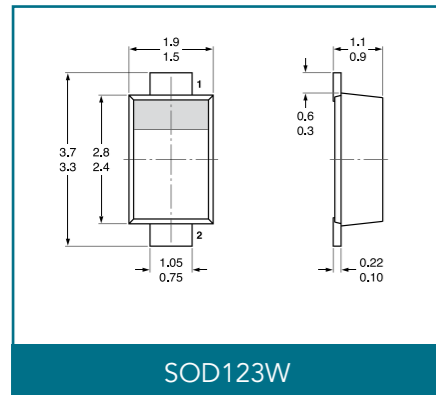


SOD123W

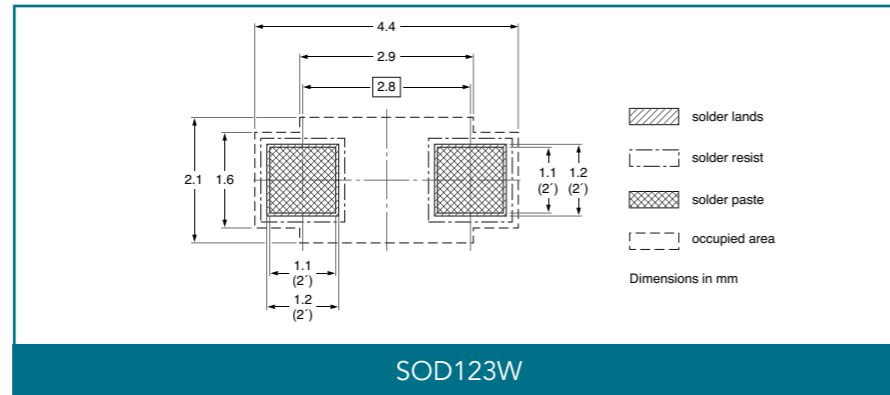


SOD123W

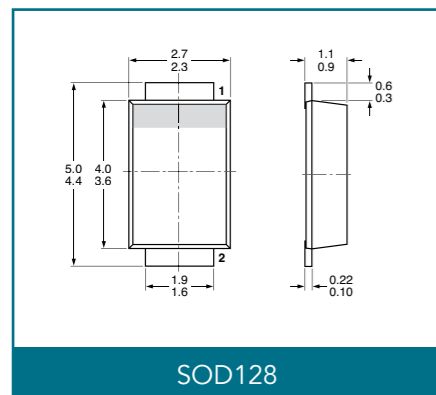


SOD128

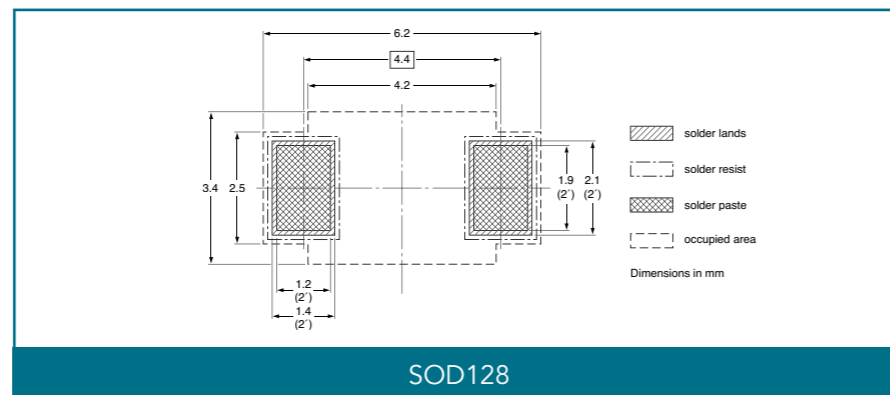

SOD128

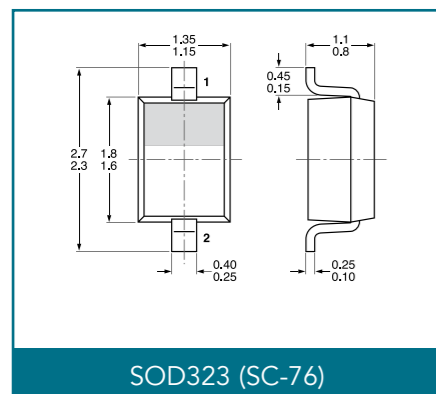


SOD323 (SC-76)

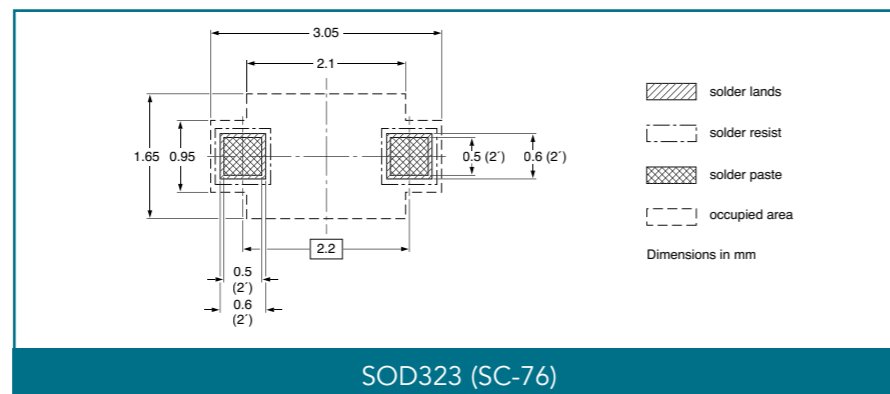


SOD323 (SC-76)

Dimensions in mm


2-pin SMD packages

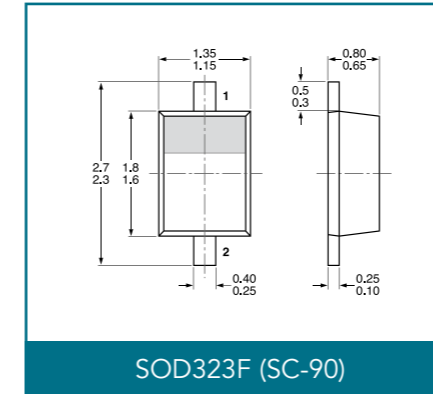


SOD323F (SC-90)

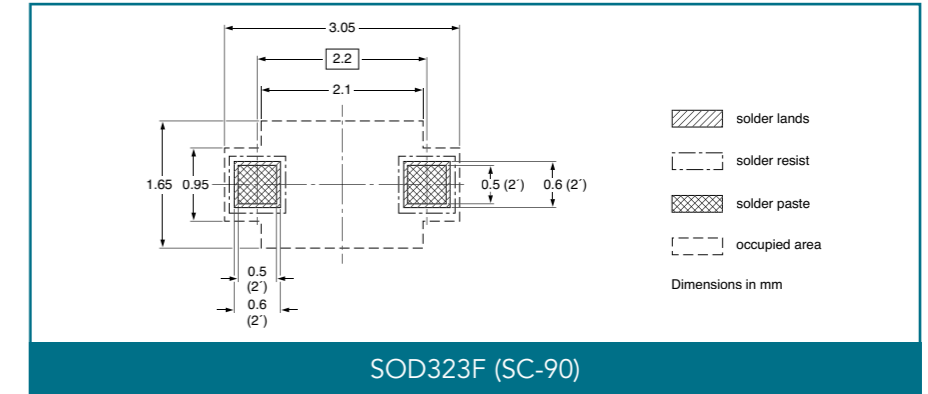

SOD323F (SC-90)

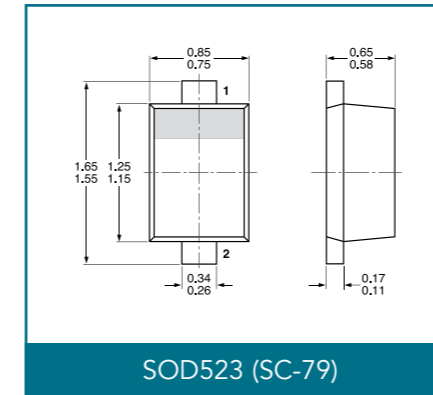


SOD523 (SC-79)

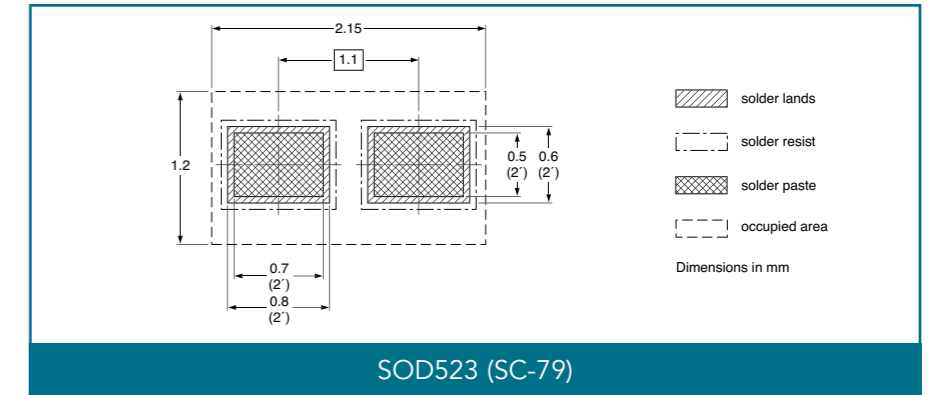


SOD523 (SC-79)


3-pin SMD packages

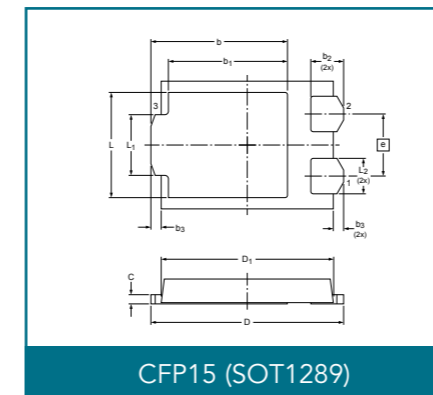


CFP15 (SOT1289)

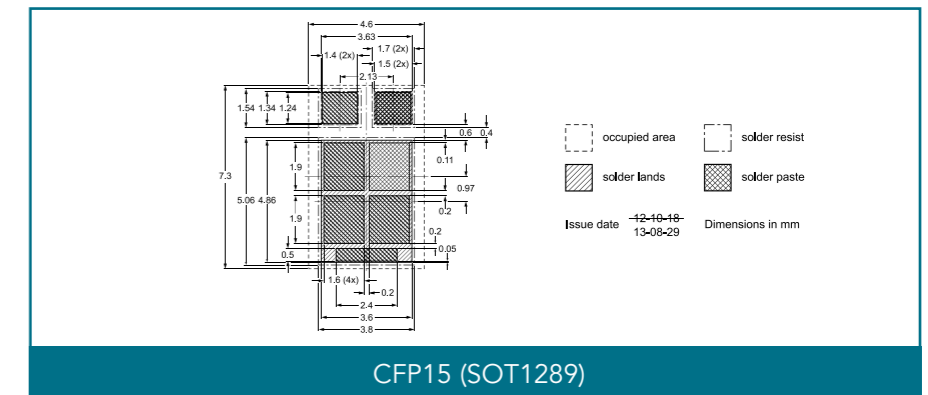

CFP15 (SOT1289)

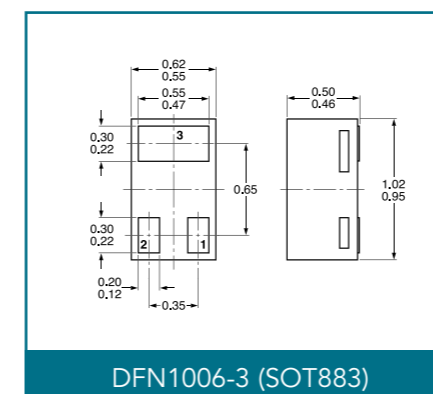

DFN1006-3 (SOT883)
















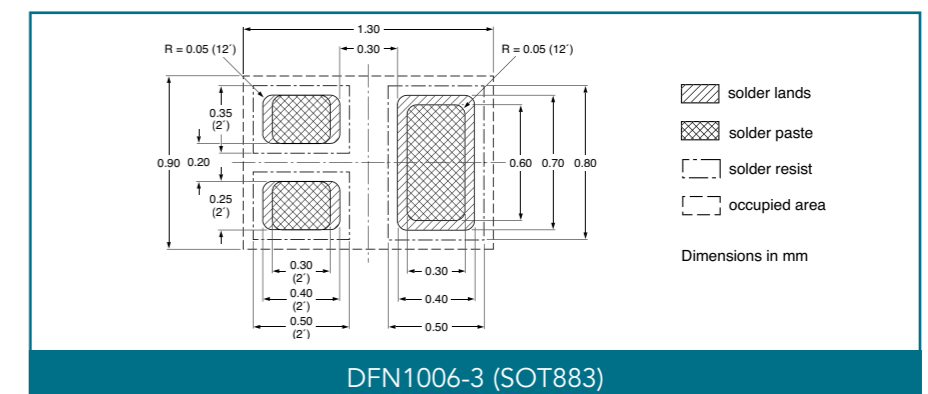


DFN1006-3 (SOT883)



Dimensions in mm

3-pin SMD packages





3-pin SMD packages

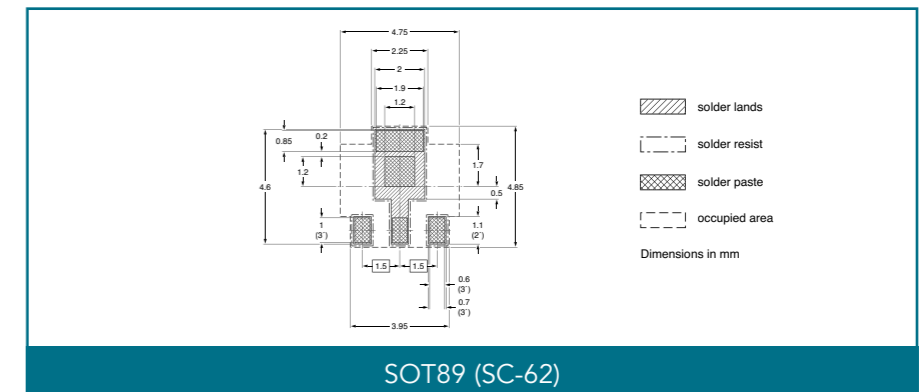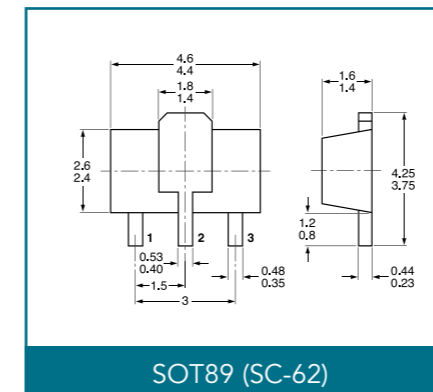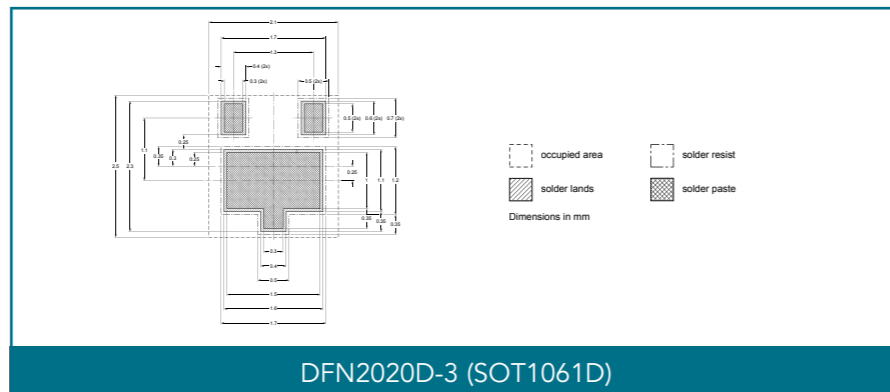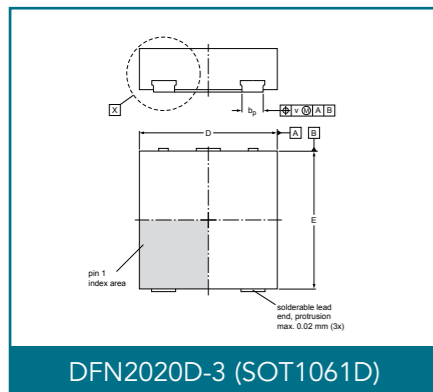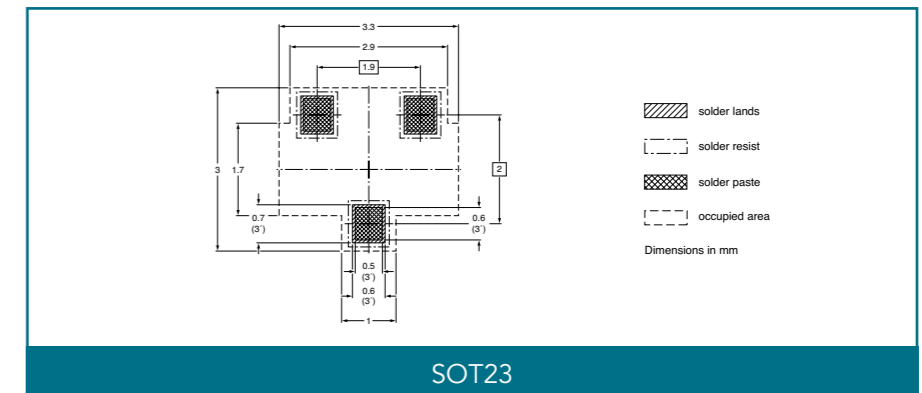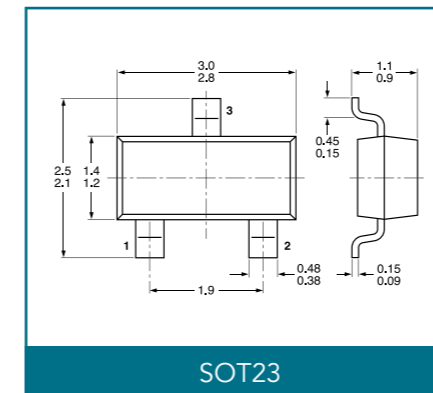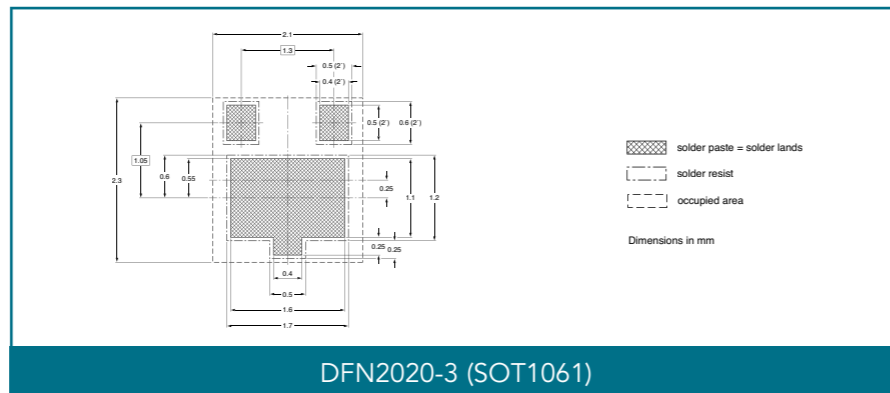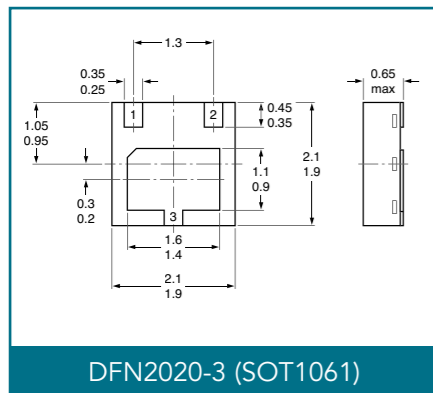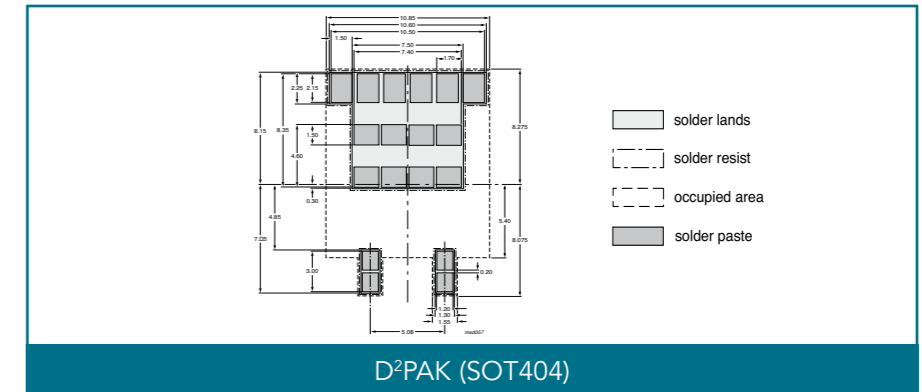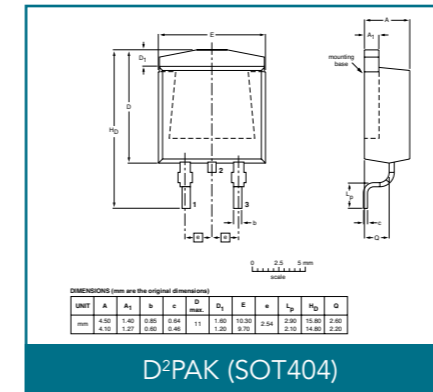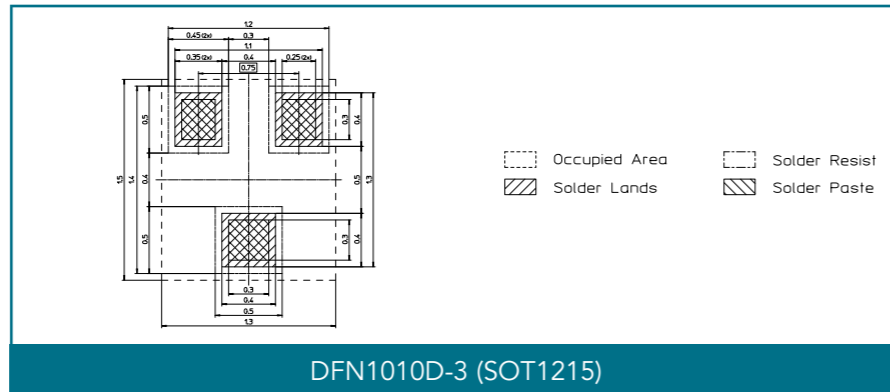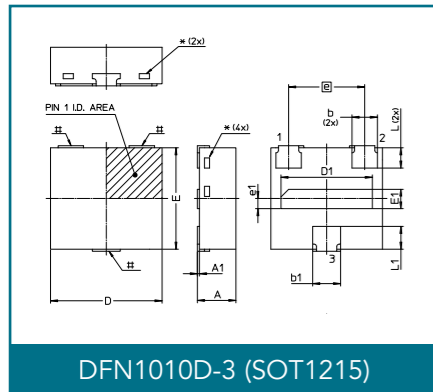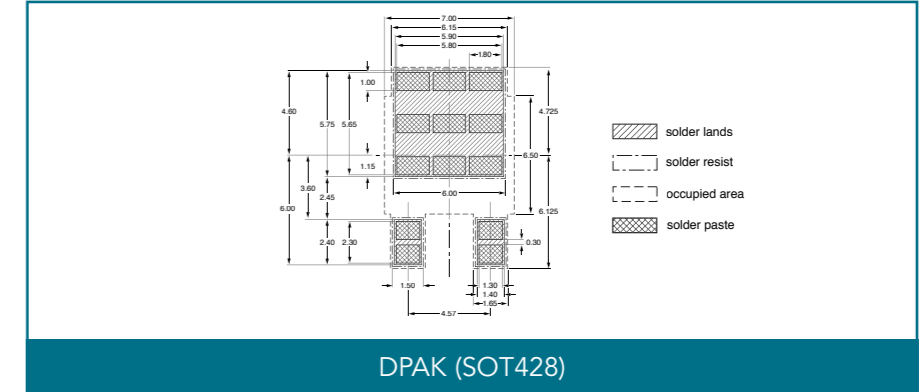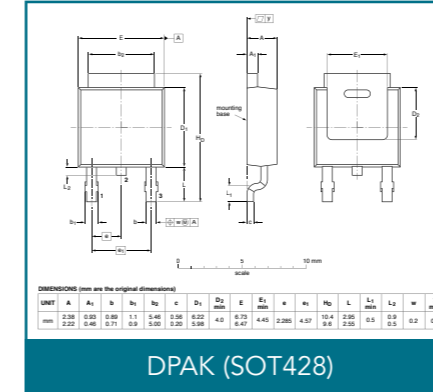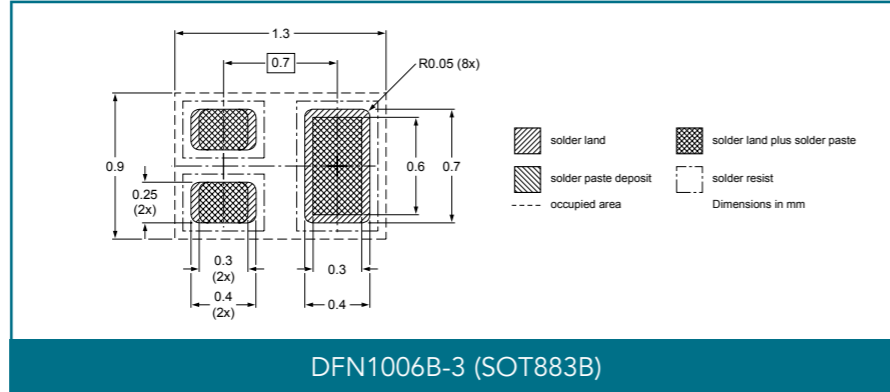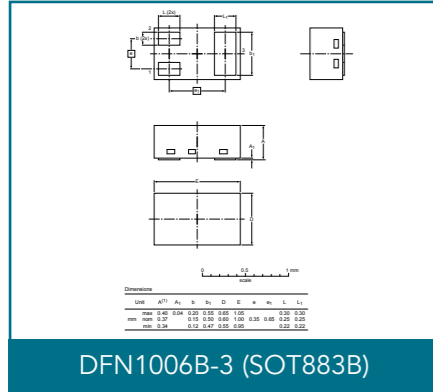



3-pin SMD packages

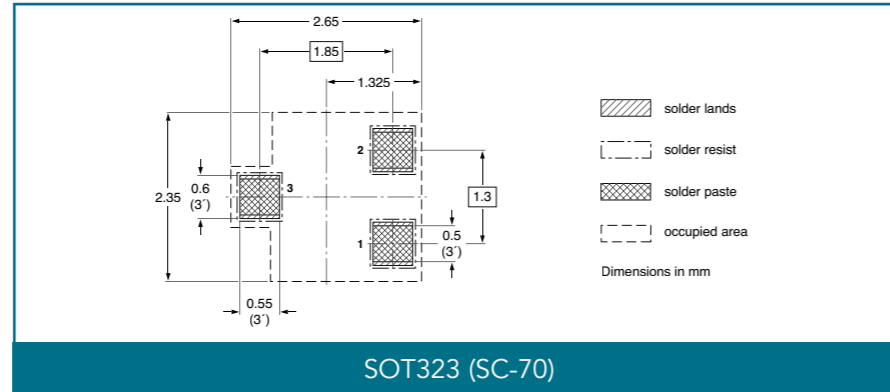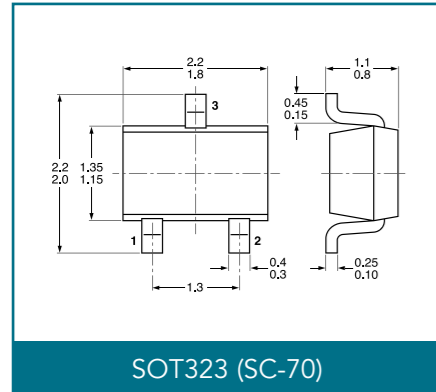





4-pin SMD packages

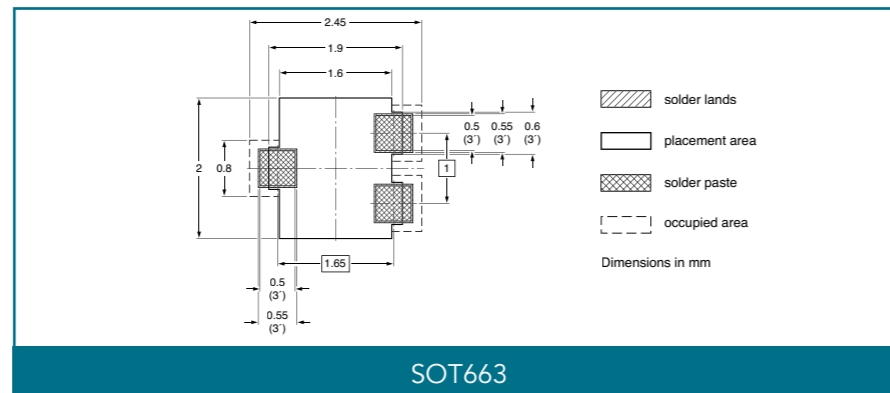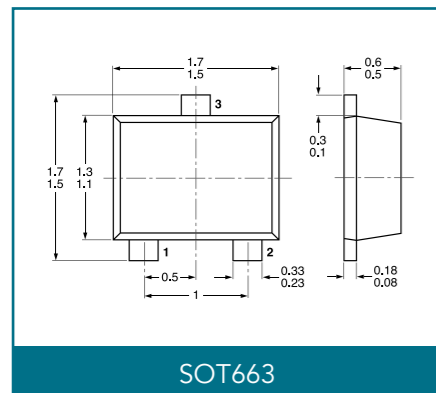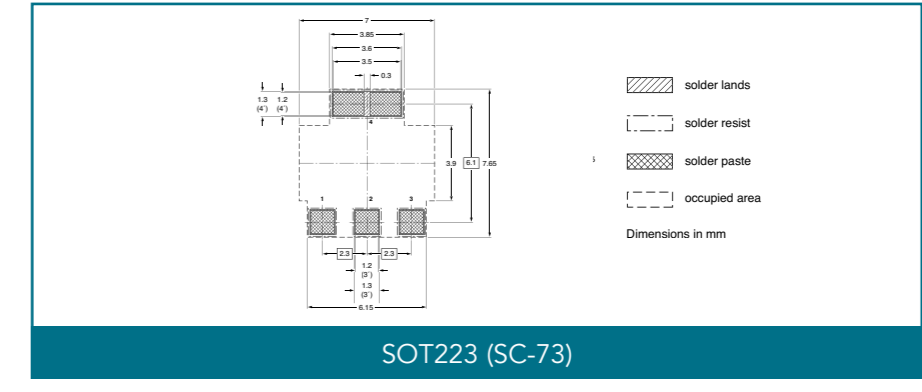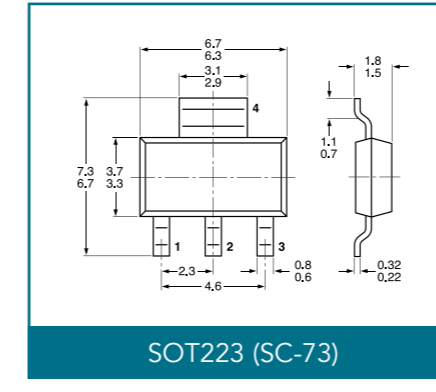





5-pin SMD packages

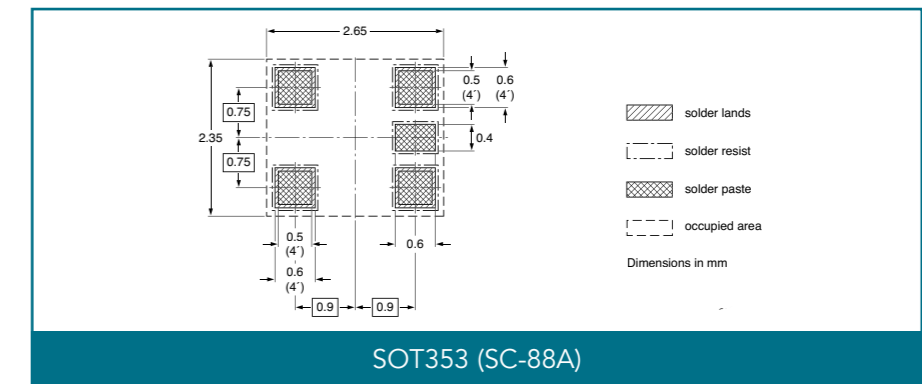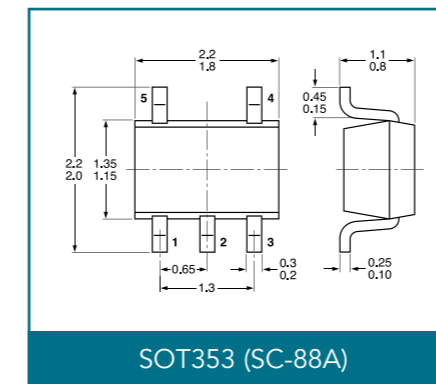


4-pin SMD packages

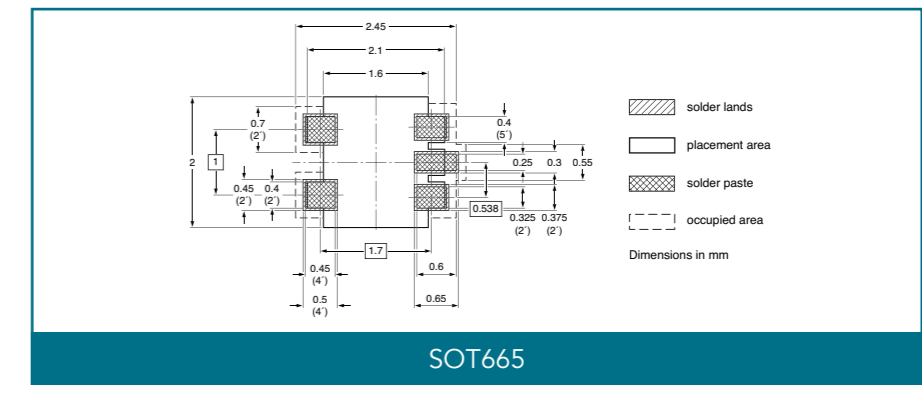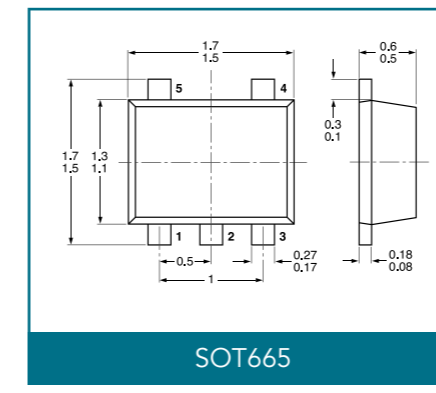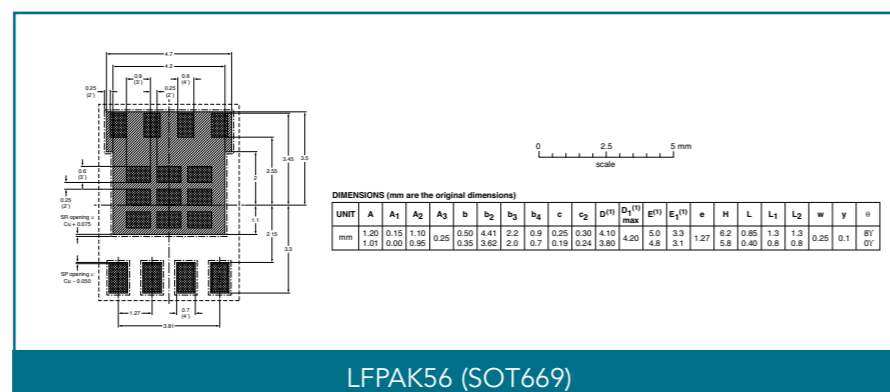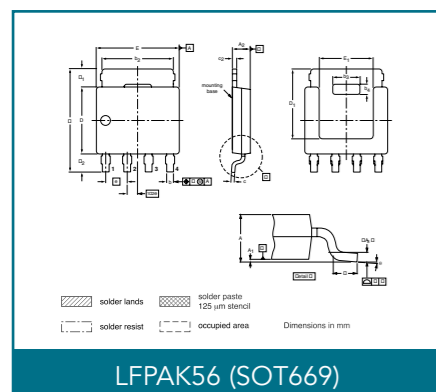


6-pin SMD packages

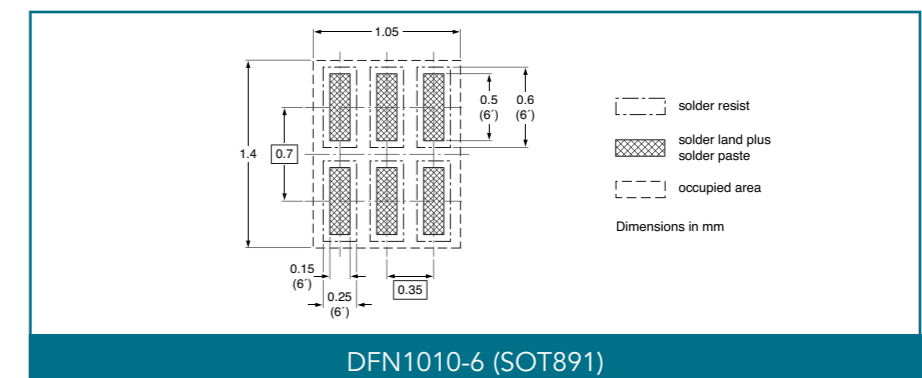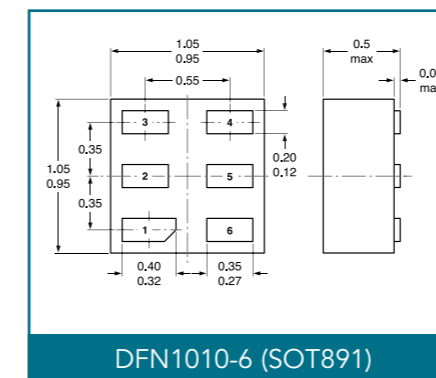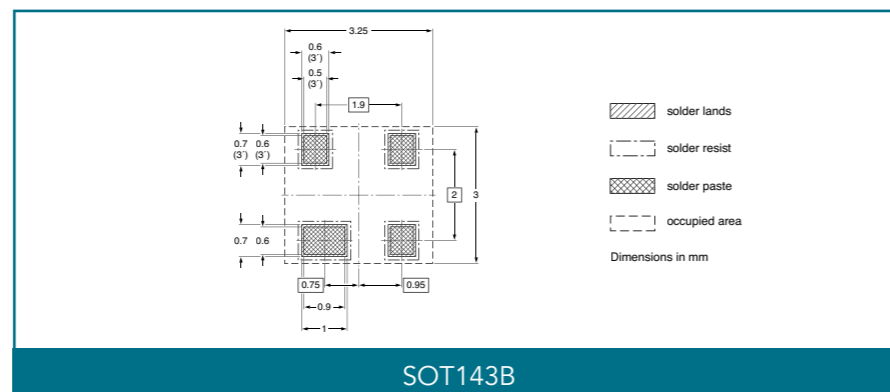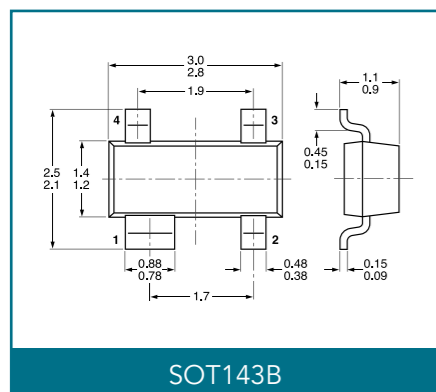

6-pin SMD packages

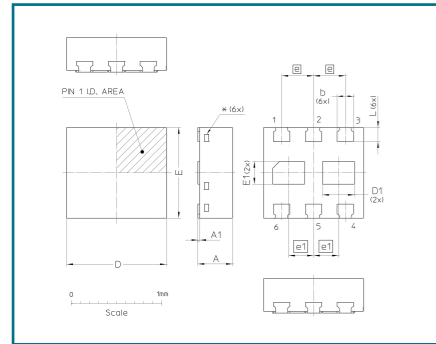


DFN1010B-6 (SOT1216)

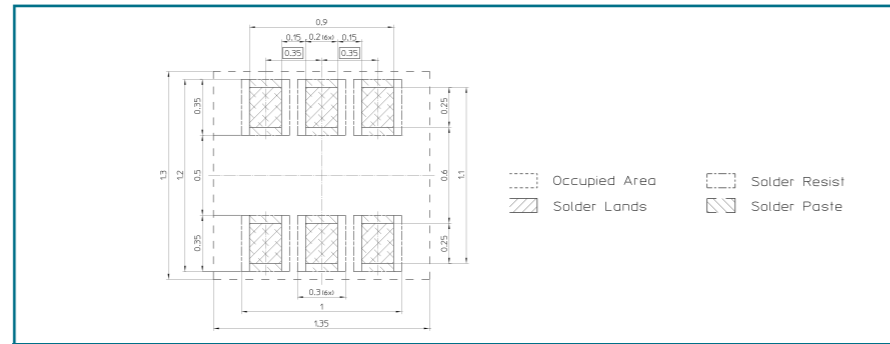


DFN1010B-6 (SOT1216)


6-pin SMD packages

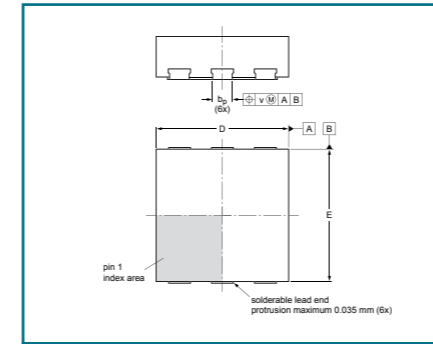


DFN2020D-6 (SOT1118D)

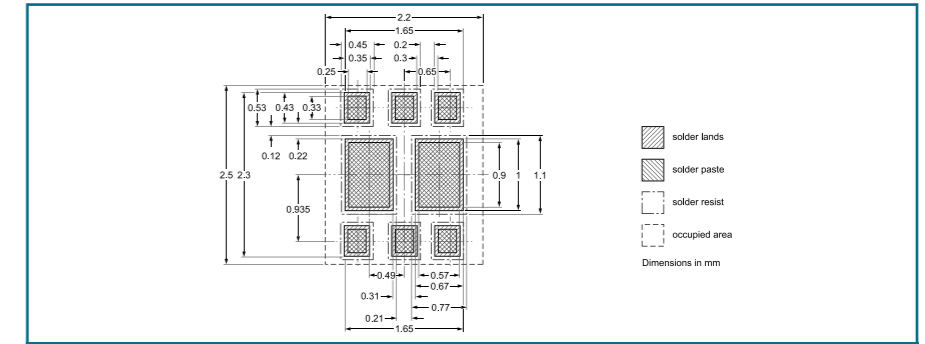


DFN2020D-6 (SOT1118D)

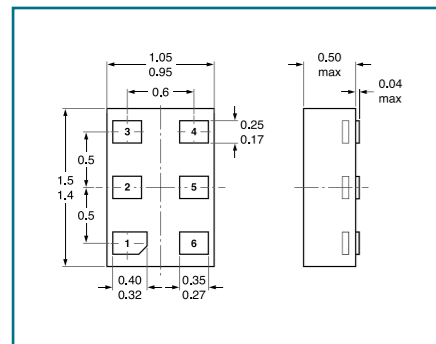


DFN1410-6 (SOT886)

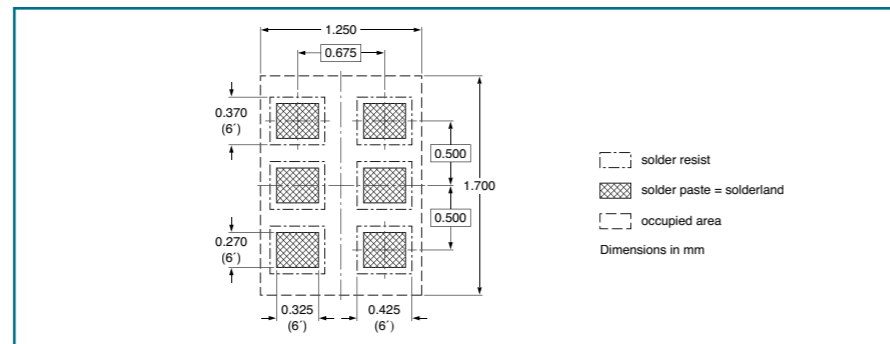


DFN1410-6 (SOT886)

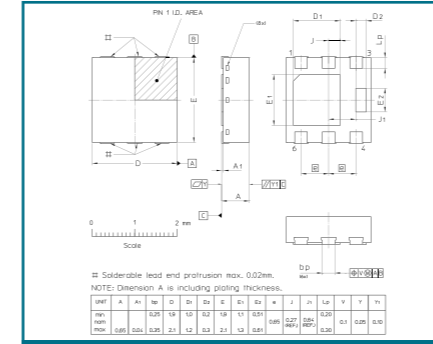


DFN2020MD-6 (SOT1220)

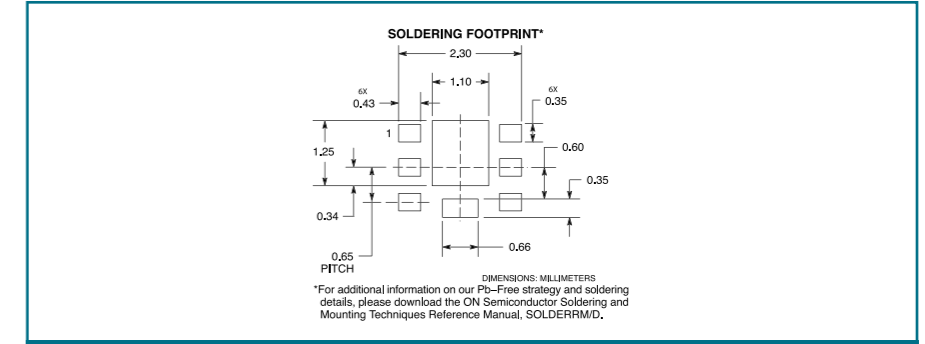


DFN2020MD-6 (SOT1220)

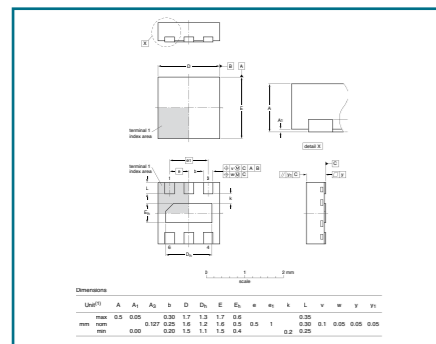


DFN1616-6 (SOT1189)

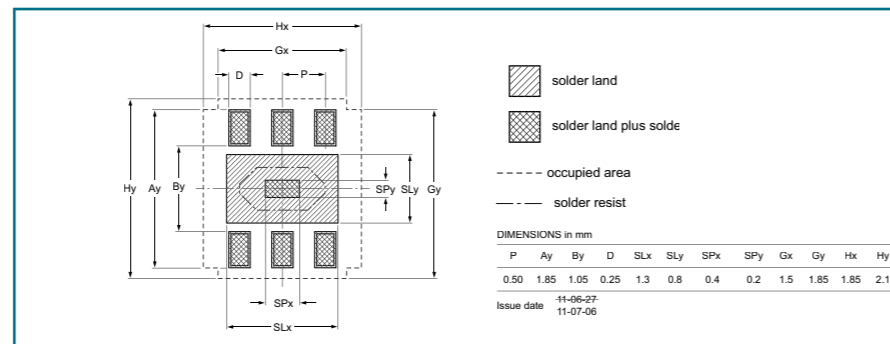


DFN1616-6 (SOT1189)

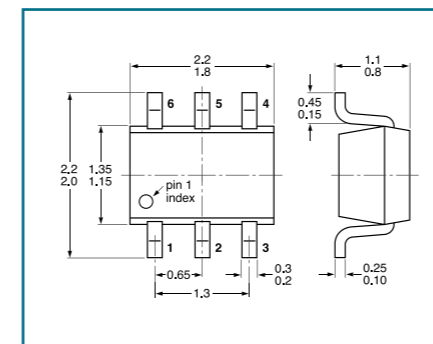


SOT363 (SC-88)

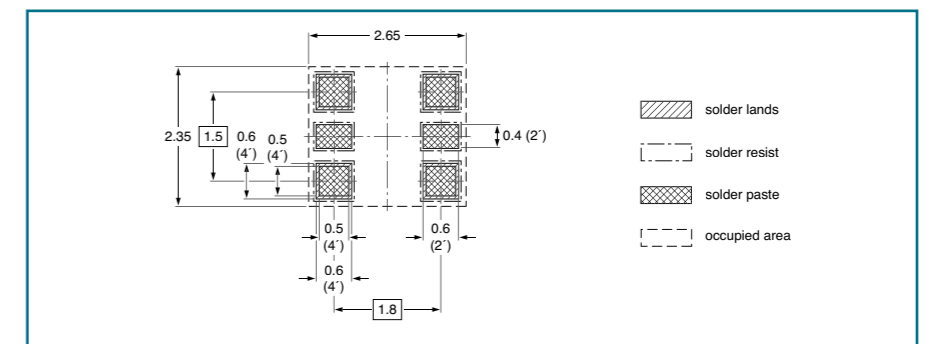


SOT363 (SC-88)

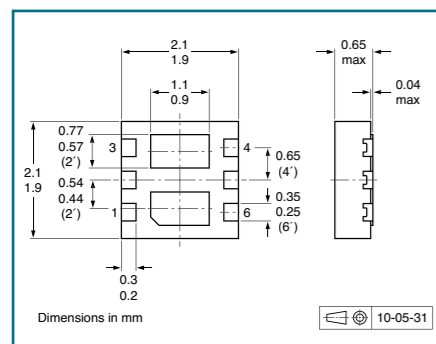


DFN2020-6 (SOT1118)

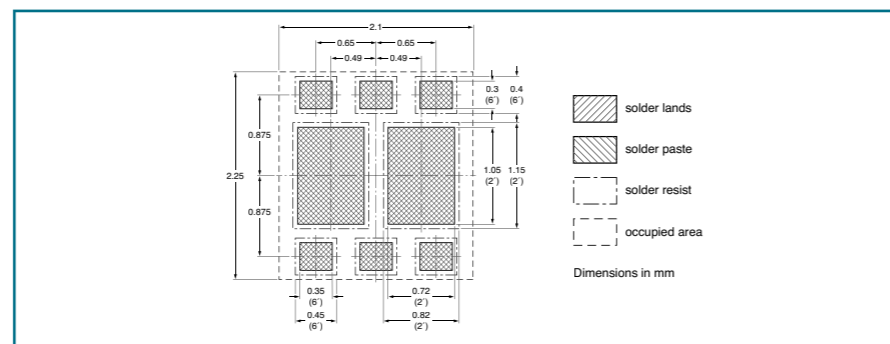

DFN2020-6 (SOT1118)


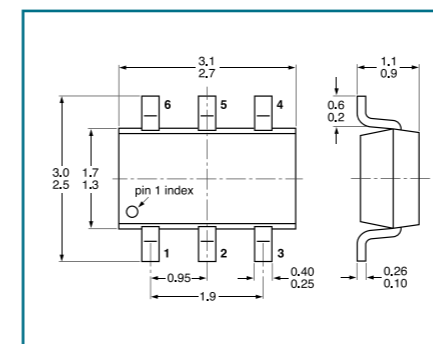


SOT457 (SC-74)




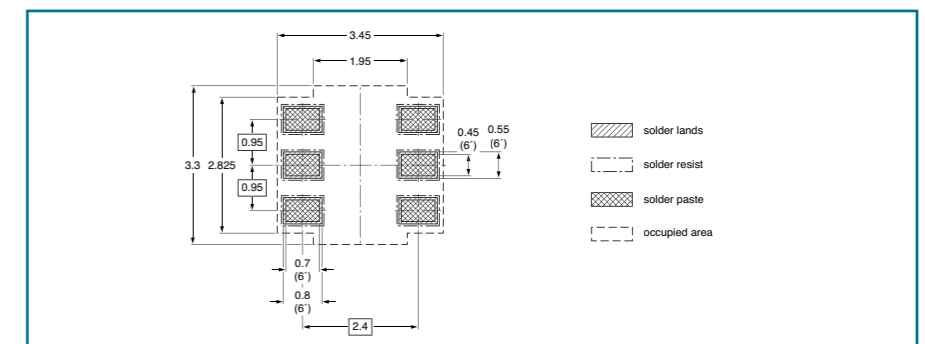


SOT457 (SC-74)



6-pin SMD packages

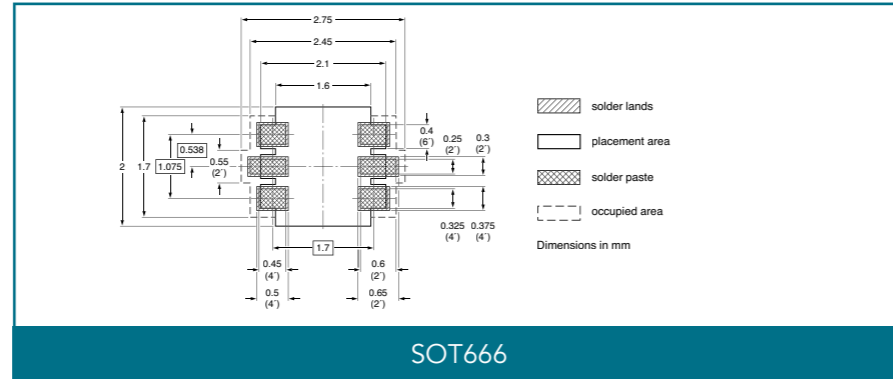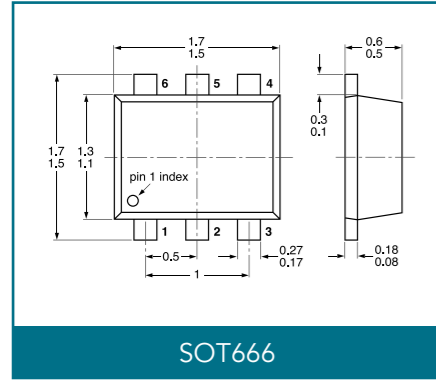

7-pin SMD packages





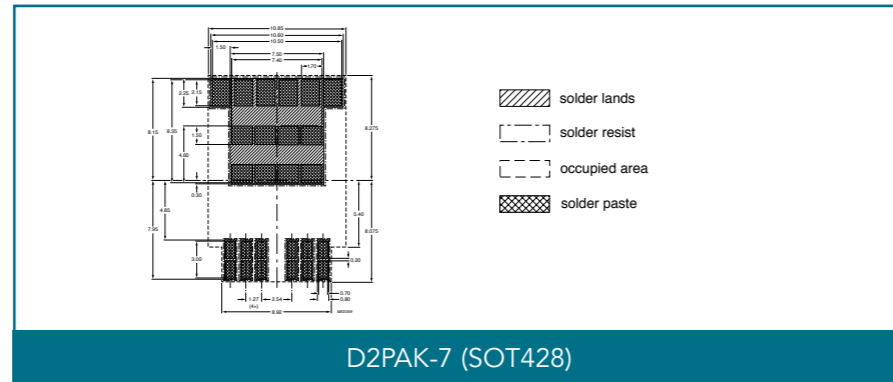
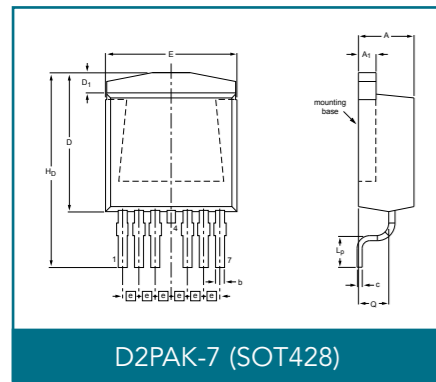
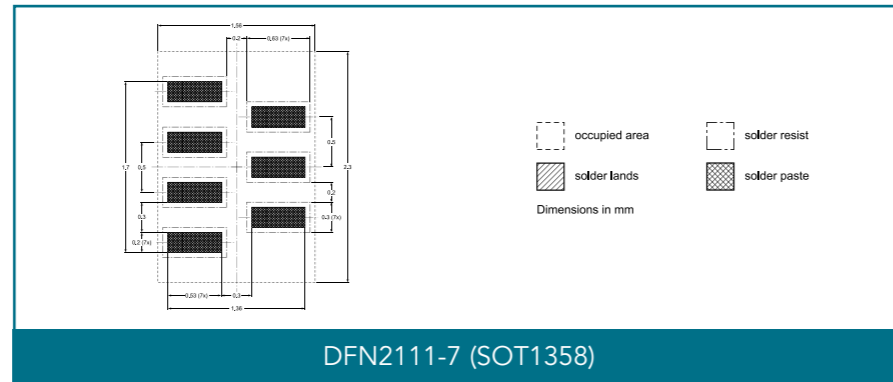
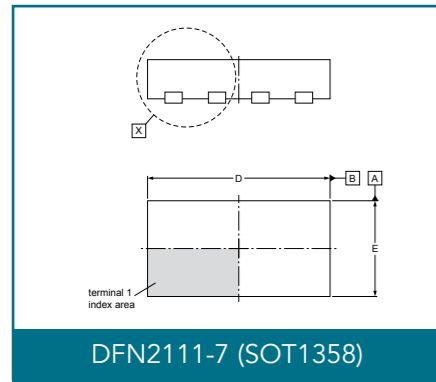


8-pin SMD packages

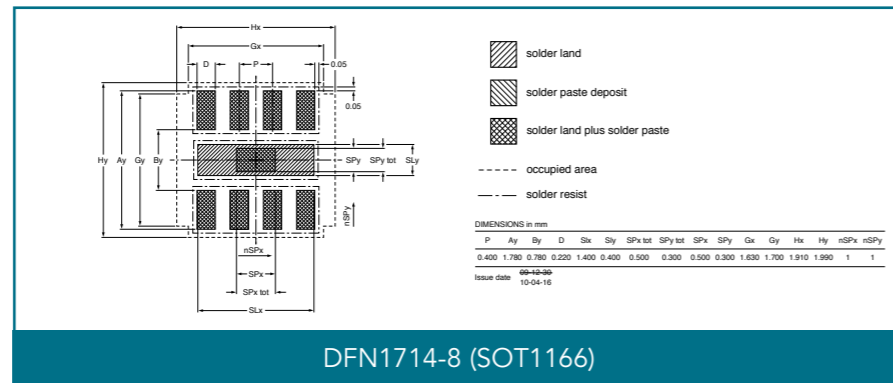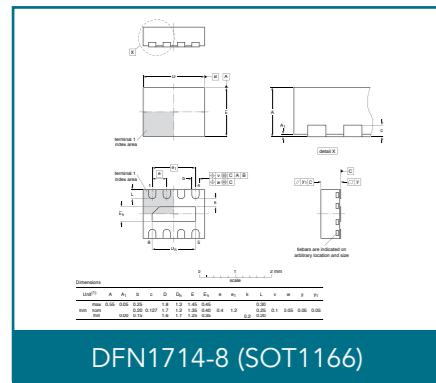



Dimensions in mm

8-pin SMD packages







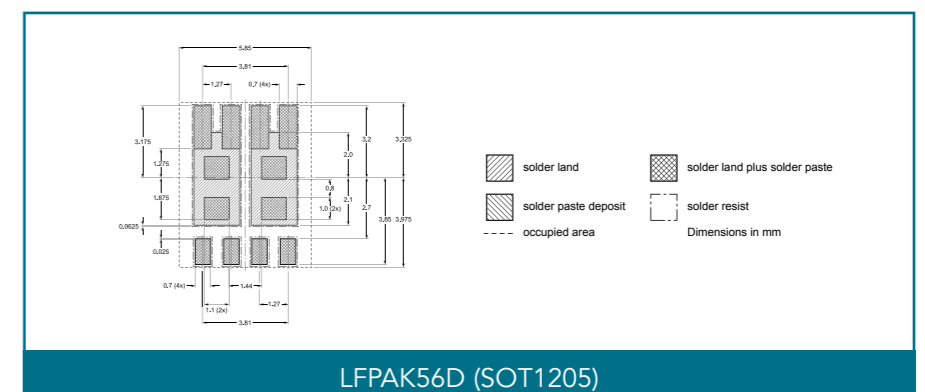
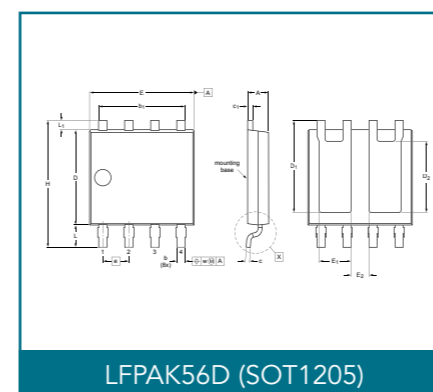
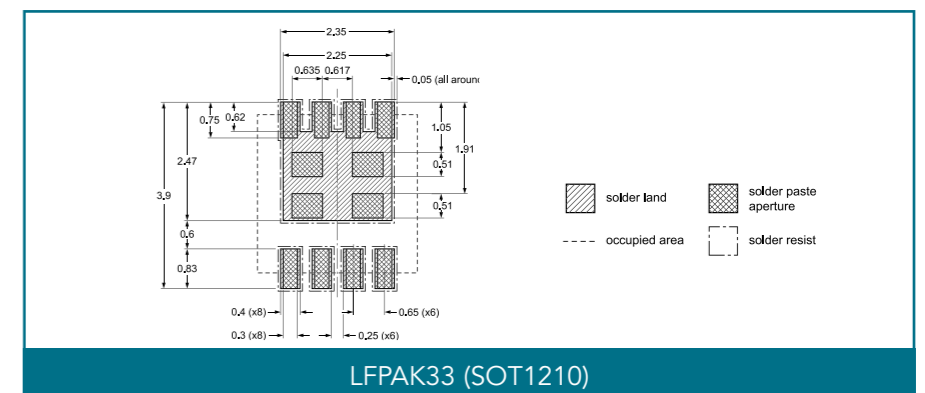
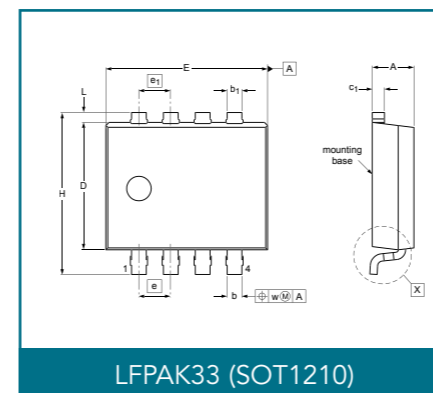
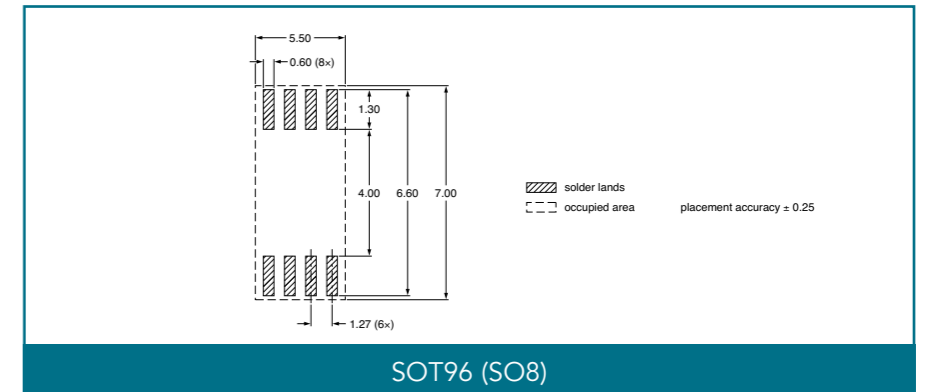
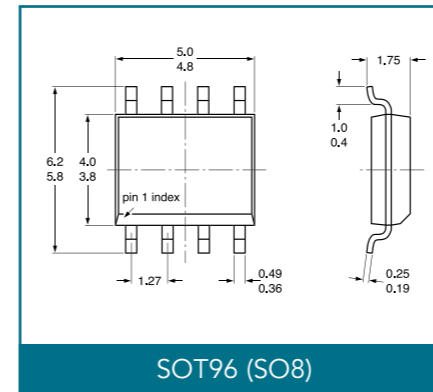
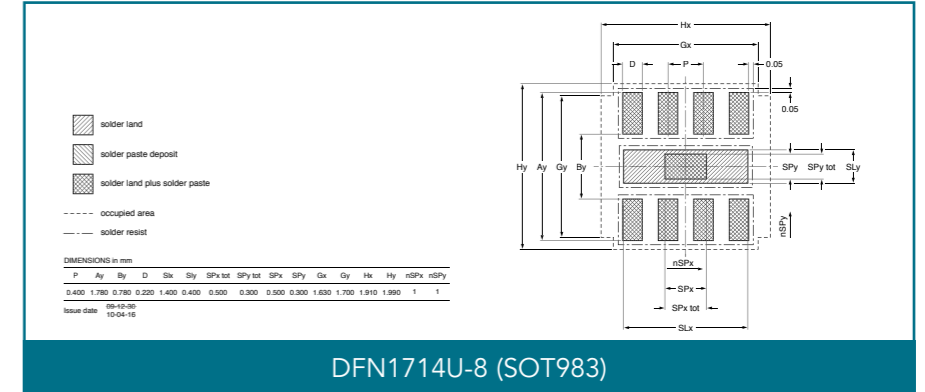
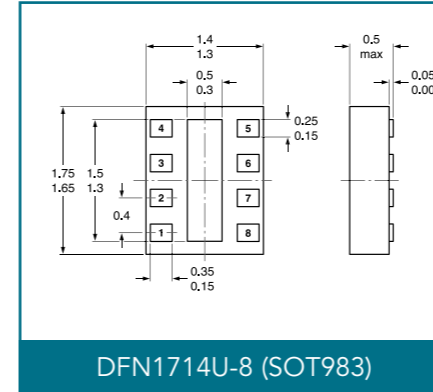


Dimensions in mm

More than 8-pin SMD packages

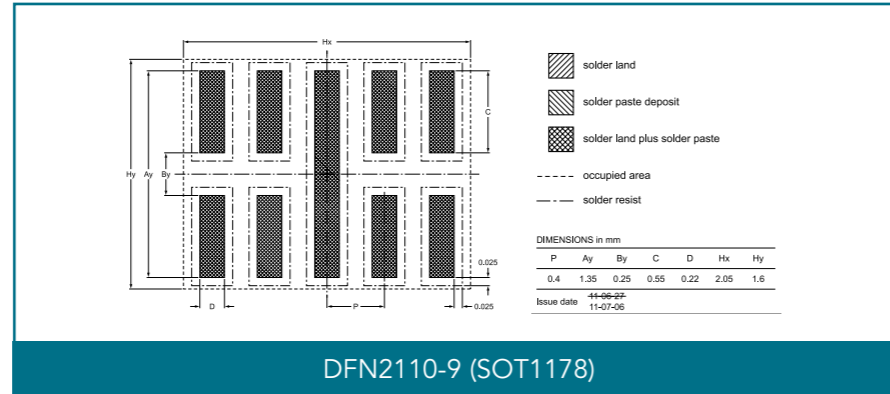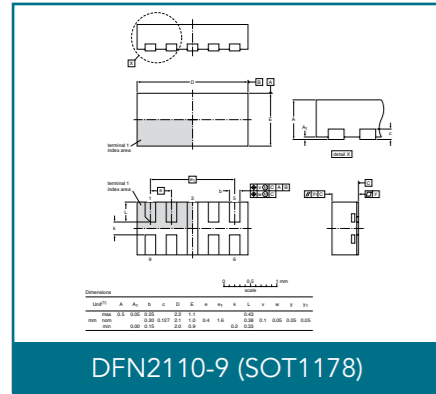

More than 8-pin SMD packages

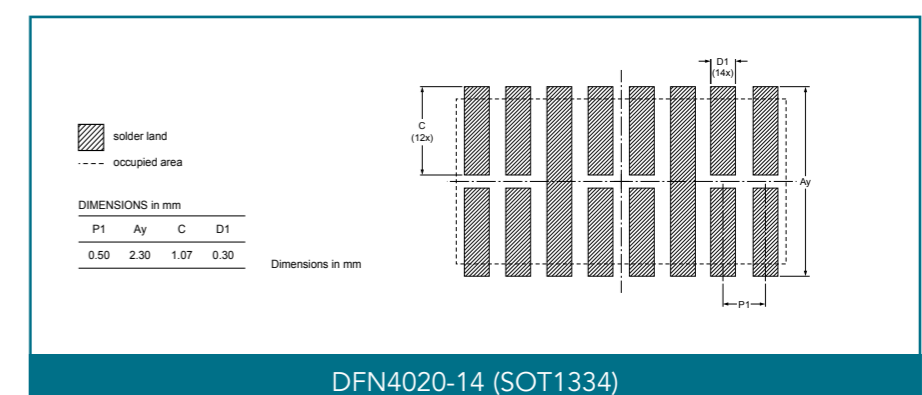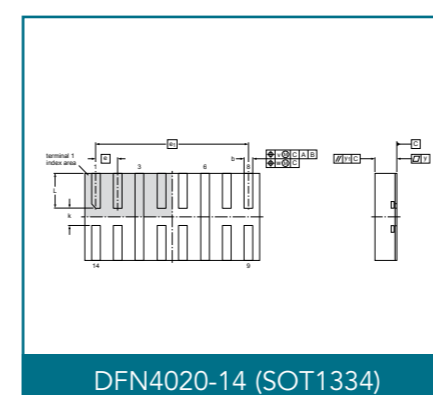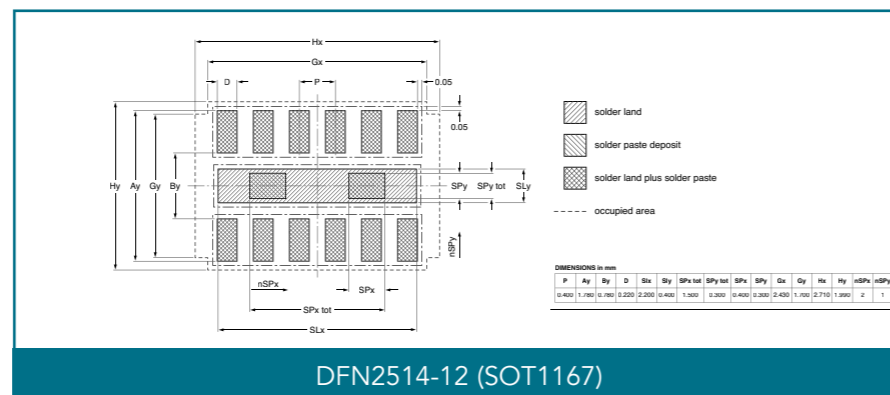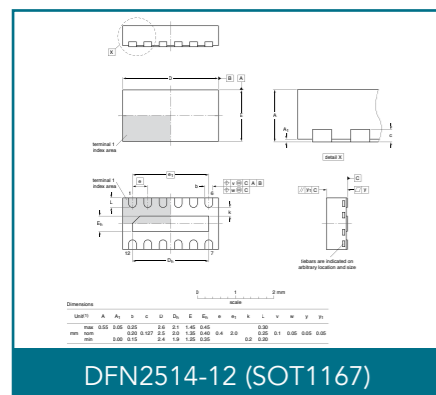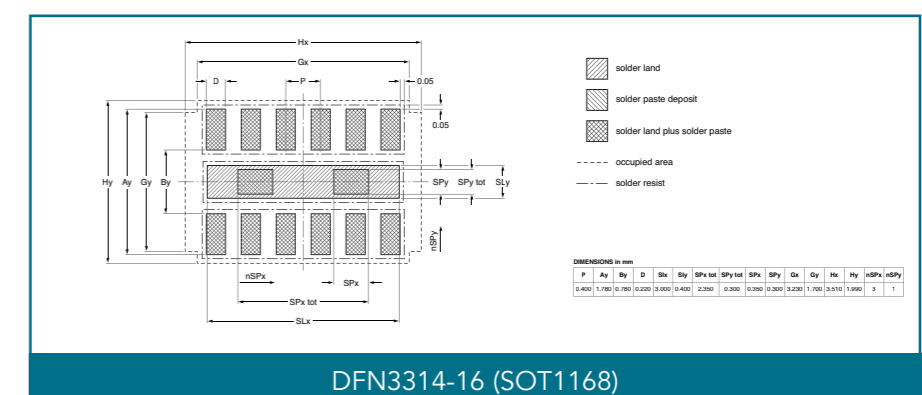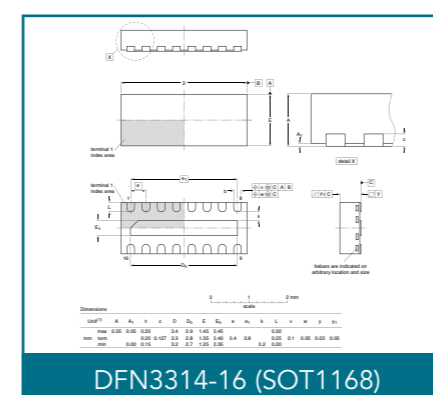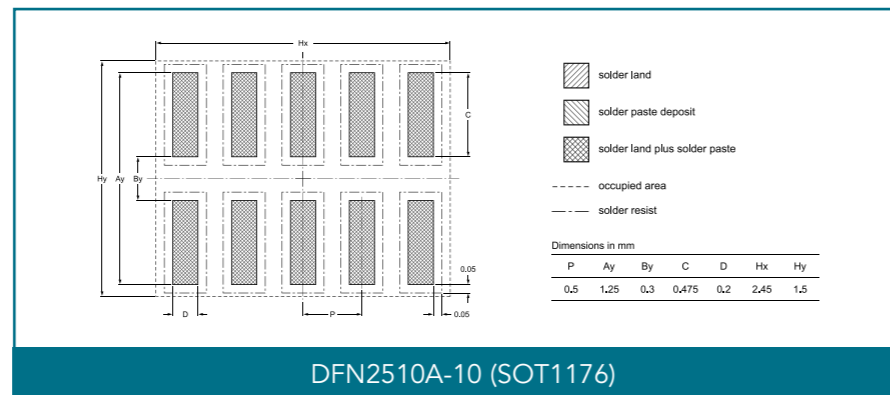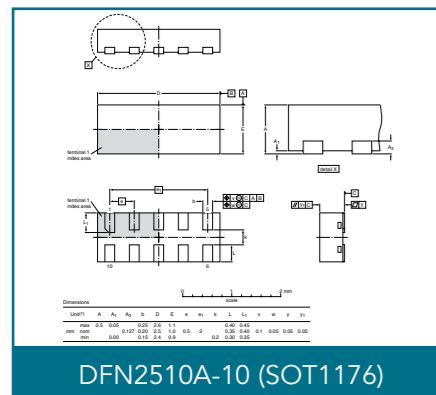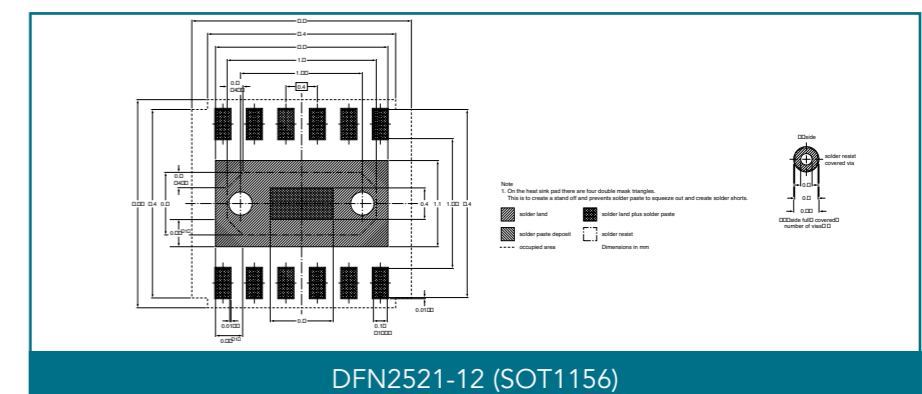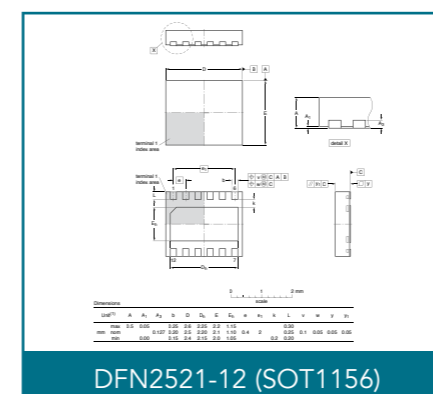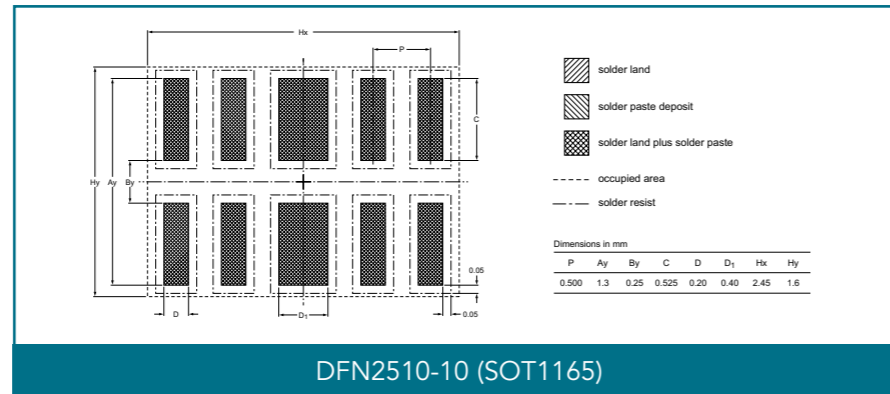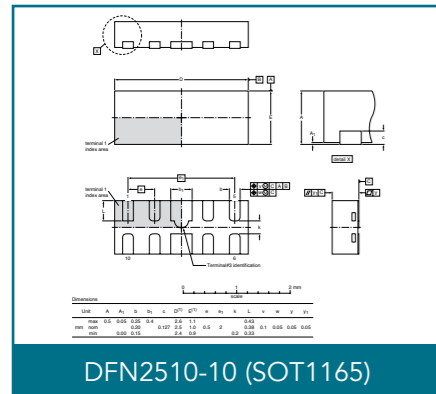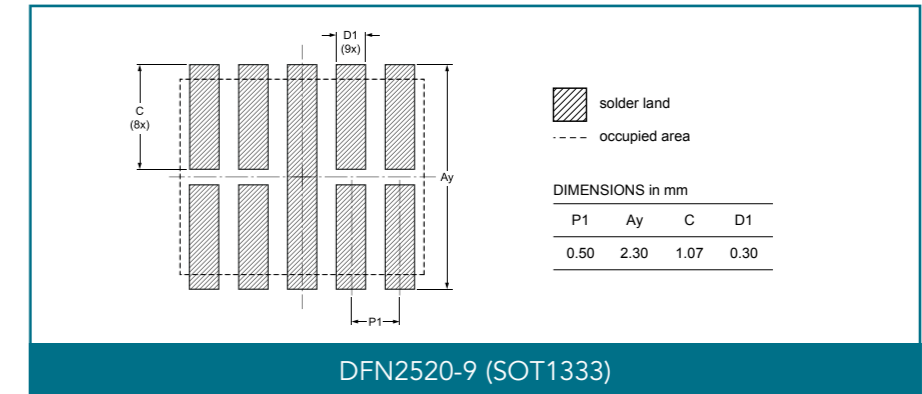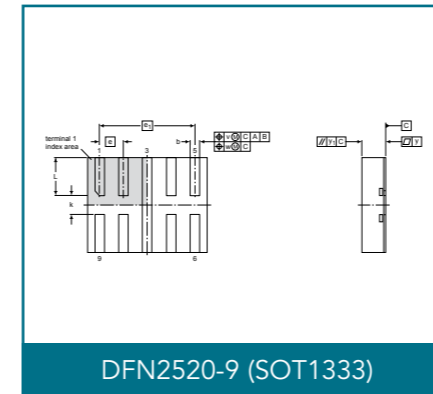

More than 8-pin SMD packages

DFN5050-32 (SOT617)

Generic footprint pattern. Refer to the package outline drawing for actual layout.

Legend: solder land, solder paste deposit, solder land plus solder paste, occupied area.

DIMENSIONS in mm

P	Ax	Ay	Bx	By	C	D	D1	SLx	SLy	SPx(1)	SPy(1)	SPx	SPy	Gx	Gy	Hx	Hy
0.500	6.000	6.000	4.200	4.200	0.900	0.200	3.100	3.100	1.800	0.700	0.700	5.300	5.300	6.250	6.250		

Issue date: 03-06-15

Single-ended and through-hole packages

SOT78 (TO220AB)

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	b ₁ (2)	b ₂ (2)	c	D	D ₁	E	e	L	L ₁ (1)	L ₂ (1) max.	p	q	Q
mm	4.7	1.40	0.9	1.6	1.3	0.7	16.0	6.6	10.3	9.7	2.54	15.0	3.30	3.8	3.0	2.6
	4.1	1.25	0.6	1.0	1.0	0.4	15.2	5.9	9.7			12.8	2.79	3.0	2.7	2.2

Notes:
1. Lead shoulder designs may vary.
2. Dimension includes excess dambar.

SOT360 (TSSOP20)

Generic footprint pattern. Refer to the package outline drawing for actual layout.

Legend: solder land, occupied area.

DIMENSIONS in mm

P1	P2	Ay	By	C	D1	D2	Gx	Gy	Hx	Hy
0.650	0.750	7.250	4.500	1.300	0.400	0.600	6.900	5.300	7.300	7.450

SOT186A (isolated TO220AB)

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	b ₁	b ₂	c	D	D ₁	E	e	e ₁	j	K	L	L ₁	L ₂ (1) max.	P	Q	q	r(2)	w
mm	4.6	2.9	0.9	1.1	1.4	0.7	15.8	6.5	10.3	2.54	5.08	2.7	0.6	14.4	3.30	3	3.2	2.6	3.0	2.5	0.4
	4.0	2.5	0.7	0.9	1.0	0.4	15.2	6.3	9.7			1.7	0.4	13.5	2.79	3	3.0	2.3	2.6	2.5	0.4

Notes:
1. Terminal dimensions within this zone are uncontrolled.
2. Both recesses are $\varnothing 2.5 \times 0.8$ max. depth.

SOT519 (SSOP16)

Generic footprint pattern. Refer to the package outline drawing for actual layout.

Legend: solder land, occupied area.

DIMENSIONS in mm

P1	P2	Ay	By	C	D1	D2	Gx	Gy	Hx	Hy
0.635	0.680	6.600	4.200	1.200	0.450	0.500	5.245	4.500	5.500	6.850

SOT226

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	b ₁	c	D max.	D ₁	E	e	L	L ₁	Q
mm	4.5	1.40	0.85	1.3	0.7	11	1.6	10.3	2.54	15.0	3.30	2.6
	4.1	1.27	0.60	1.0	0.4		1.2	9.7		13.5	2.79	2.2

Glass diodes

SOD27 (DO-35)

SOD66 (DO-41)

SOD68 (DO-34)

SOT263B-1

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	c	D	D ₁	E	e	L	L ₂	L ₃ (1)	L ₄ (2) max.	m	∅p	p ₁	q	Q	Q ₁	Q ₂	R	w	
mm	4.5	1.39	0.85	0.7	15.8	6.4	10.3	1.7	9.8	5.9	5.2	2.4	0.5	0.8	3.8	4.3	3.0	2.0	4.5	8.2	0.5	0.4
	4.1	1.27	0.70	0.4	15.2	5.9	9.7		9.7	5.3	5.0	1.6		0.6	3.6	4.1	2.7					

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
1N47xxA series	40	2PD601BRL	22	BAS70-04W	38	BAT160A	37	BC52PAS / BC52-10PAS / BC52-16PAS	24
1PS10SB82	39	2PD601BSL	22	BAS70-05	38	BAT160C	37	BC53PA / BC53-10PA / BC53-16PA	24
1PS66SB17	39	2PD602AQL	22	BAS70-05W	38	BAT160S	37	BC53PAS / BC53-10PAS / BC53-16PAS	24
1PS66SB82	39	2PD602ARL	22	BAS70-06	38	BAT720	36	BC54PA / BC54-10PA / BC54-16PA	24
1PS70SB20	36	2PD602ASL	22	BAS70-06W	38	BAT721	38	BC54PAS / BC54-10PAS / BC54-16PAS	24
1PS70SB82	39	2PD1820AR / S	22	BAS70-07	38	BAT721A	38	BC55PA / BC55-10PA / BC55-16PA	24
1PS70SB84	39	BAL74	42	BAS70-07S	38	BAT721C	38	BC55PAS / BC55-10PAS / BC55-16PAS	24
1PS70SB85	39	BAL99	42	BAS70-07V	38	BAT721S	38	BC56PA / BC56-10PA / BC56-16PA	24
1PS70SB86	39	BAS16	42	BAS70H	38	BAT754	38	BC56PAS / BC56-10PAS / BC56-16PAS	24
1PS74SB23	36	BAS16H	42	BAS70L	38	BAT754A	38	BC68PA / BC68-25PA	24
1PS76SB10	38	BAS16J	42	BAS70VV	38	BAT754C	38	BC68PAS / BC68-25PAS	24
1PS76SB17	39	BAS16L	42	BAS70W	38	BAT754L	38	BC69PA / BC69-16PA / BC69-25PA	24
1PS76SB21	38	BAS16LD	42	BAS70XY	38	BAT754S	38	BC69PAS / BC69-16PAS / BC69-25PAS	24
1PS76SB40	38	BAS16QA	42	BAS85	38	BAT760	36	BC807 / -16 / -25 / -40	22
1PS76SB70	38	BAS16VV	42	BAS86	38	BAT854AW	38	BC807 / -25QA / -40QA	22
1PS79SB10	38	BAS16VY	42	BAS101	43	BAT854CW	38	BC807DS	23
1PS79SB17	39	BAS16W	42	BAS101S	43	BAT854SW	38	BC807W / -16W / -25W / -40W	22
1PS79SB30	38	BAS19	43	BAS116	44	BAT854W	38	BC817 / -16 / -25 / -40	22
1PS79SB31	38	BAS20	43	BAS116H	44	BAT960	36	BC817 / -25QA / -40QA	22
1PS79SB40	38	BAS21	43	BAS116L	44	BAV23	43	BC817DPN	23
1PS79SB70	38	BAS21AVD	43	BAS116QA	44	BAV23A	43	BC817DS	23
1PS88SB48	38	BAS21AW	43	BAS316	42	BAV23C	43	BC817W / -16W / -25W / -40W	22
1PS88SB82	39	BAS21H	43	BAS321	43	BAV23S	43	BC846 / A / B	22
1PS300	42	BAS21J	43	BAS416	44	BAV70	42	BC846BM	22
1PS301	42	BAS21PG	43	BAS521	43	BAV70M	42	BC846BMB	22
1PS302	42	BAS21SW	43	BAS716	44	BAV70QA	42	BC846BPN	23
2N700BKM	78	BAS21VD	43	BAT17	39	BAV70S	42	BC846BS	23
2N7002BK	84, 116	BAS21W	43	BAT46WH	38	BAV70W	42	BC846DS	23
2N7002BKM	84, 116	BAS28	42	BAT46WJ	38	BAV74	42	BC846S	23
2N7002BKMB	78	BAS29	44	BAT54	38	BAV99	42	BC846W / AW / BW	22
2N7002BKS	84, 116	BAS31	44	BAT54A	38	BAV99QA	42	BC847 / A / B / C	22
2N7002BKW	84, 116	BAS32L	42	BAT54AW	38	BAV99S	42	BC847AMB / BMB / CMB	22
2N7002CK	84, 116	BAS35	44	BAT54C	38	BAV99W	42	BC847AM / BM / CM	22
2PA1576Q / R / S	22	BAS40	38	BAT54CM	38	BAV102	43	BC847AQA / BQA / CQA	22
2PA1774QMB / RMB / SMB	22	BAS40-04	38	BAT54CV	38	BAV103	43	BC847BPN	23
2PA1774QM / RM / SM	22	BAS40-04W	38	BAT54CW	38	BAV170	44	BC847BS	23
2PB709ARL	22	BAS40-05	38	BAT54H	38	BAV170M	44	BC847BV	23
2PB709ART	22	BAS40-05V	38	BAT54J	38	BAV170QA	44	BC847BVN	23
2PB709ARW / SW	22	BAS40-05W	38	BAT54L	38	BAV199	44	BC847DS	23
2PB709ASL	22	BAS40-06	38	BAT54S	38	BAV199W	44	BC847QAPN	23
2PB709BRL	22	BAS40-06W	38	BAT54SW	38	BAV756S	42	BC847QAS	23
2PB709BSL	22	BAS40-07	38	BAT54VV	38	BAW56	42	BC847W / AW / BW / CW	22
2PB710ARL	22	BAS40-07V	38	BAT54W	38	BAW56M	42	BC848B	22
2PB710ASL	22	BAS40H	38	BAT54XY	38	BAW56QA	42	BC848W	22
2PB1219AQ / R / S	22	BAS40L	38	BAT74	38	BAW56S	42	BC849B	26
2PC4081Q / R / S	22	BAS40W	38	BAT74S	38	BAW56W	42	BC849BW	26
2PC4617QMB / RMB	22	BAS40XY	38	BAT74V	38	BAW101	43	BC849C	26
2PC4617QM / RM	22	BAS45A	44	BAT85	38	BAW101S	43	BC849CW	26
2PD601ARL	22	BAS45AL	44	BAT86	38	BAW156	44	BC850B	26
2PD601ART	22	BAS56	44	BAT120A	37	BC51PA / BC51-10PA / BC51-16PA	24	BC850BW	26
2PD601ARW / SW	22	BAS70	38	BAT120C	37	BC51PAS / BC51-10PAS / BC51-16PAS	24	BC850C	26
2PD601ASL	22	BAS70-04	38	BAT120S	37	BC52PA / BC52-10PA / BC52-16PA	24	BC850CW	26

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
BC856 / A / B	22	BCV49	26	BSP43	24	BUK7K6R2-40E	119	BUK7Y6S-100E	125
BC856BM	22	BCV61/A/B/C	27	BSP50	26	BUK7K6R8-40E	119	BUK7Y72-80E	124
BC856BMB	22	BCV62/A/B/C	27	BSP51	26	BUK7K8R7-40E	119	BUK7Y98-80E	124
BC856BS	23	BCV63 / B	26	BSP52	26	BUK7K12-60E	121	BUK7Y102-100B	125
BC856S	23	BCV64B	26	BSP60	26	BUK7K13-60E	121	BUK7Y113-100E	125
BC856W / AW / BW	22	BCV65	28	BSP61	26	BUK7K17-60E	121	BUK7Y153-100E	125
BC857 / A / B / C	22	BCV71 / 72	22	BSP62	26	BUK7K18-40E	119	BUK9C10-55BIT	122, 129
BC857AMB / BMB / CMB	22	BCW29 / 30	22	BSR14	23	BUK7K25-40E	119	BUK9E04-40A	120
BC857AM / BM / CM	22	BCW31 / 32 / 33	22	BSR16	23	BUK7K29-100E	125	BUK9E06-55A	123
BC857AQA / BQA / CQA	22	BCW60B / C / D	22	BSR30 / 31	24	BUK7K32-100E	125	BUK9E06-55B	123
BC857BS	23	BCW61B / C / D	22	BSR33	24	BUK7K35-60E	121	BUK9E08-55B	123
BC857BV	23	BCW69 / 70	22	BSR41	24	BUK7K45-100E	125	BUK9K5R1-30E	118
BC857QAS	23	BCW71 / 72	22	BSR43	24	BUK7K52-60E	121	BUK9K5R6-30E	118
BC857W / AW / BW / CW	22	BCW89	22	BSS63	22, 24	BUK7K89-100E	125	BUK9K6R2-40E	119
BC858B	22	BCX17	22	BSS64	22, 24	BUK7K134-100E	125	BUK9K6R8-40E	119
BC858W	22	BCX18	22	BSS84AK	84, 88, 116	BUK7L06-34ARC	128	BUK9K8R7-40E	119
BC859B	26	BCX19	22	BSS84AKM	78, 84, 88, 116	BUK7L11-34ARC	128	BUK9K12-60E	121
BC859BW	26	BCX51 / -10 / -16	24	BSS84AKMB	78, 88	BUK7Y3R5-40E	119	BUK9K13-60E	121
BC859C	26	BCX52 / -10 / -16	24	BSS84AKS	84, 90, 116	BUK7Y4R4-40E	119	BUK9K17-60E	121
BC859CW	26	BCX53 / -10 / -16	24	BSS84AKV	84, 90, 116	BUK7Y4R8-60E	121	BUK9K18-40E	119
BC860B	26	BCX54 / -10 / -16	24	BSS84AKW	84, 88, 116	BUK7Y6R0-60E	121	BUK9K25-40E	119
BC860BW	26	BCX55 / -10 / -16	24	BSS138AKA	84, 116	BUK7Y07-30B	118	BUK9K29-100E	125
BC860C	26	BCX56 / -10 / -16	24	BSS138BK	84, 116	BUK7Y7R2-60E	121	BUK9K32-100E	125
BC860CW	26	BCX70G / H / J / K	22	BSS138BKS	84, 116	BUK7Y7R6-40E	119	BUK9K35-60E	121
BC868 / -25	24	BCX71H / J / K	22	BSS138BKW	84, 116	BUK7Y7R8-80E	124	BUK9K45-100E	125
BC869 / -16 / -25	24	BF550	28	BSS138P	84, 116	BUK7Y08-40B	119	BUK9K52-60E	121
BCM61B	27	BF570	28	BSS138PS	84, 116	BUK7Y8R7-60E	121	BUK9K89-100E	125
BCM62B	27	BF620	24	BSS138PW	84, 116	BUK7Y9R9-80E	124	BUK9K134-100E	125
BCM846BS	27	BF621	24	BST39	24	BUK7Y10-30B	118	BUK9Y3R0-40E	119
BCM847BS	27	BF622	24	BST50	26	BUK7Y12-40E	119	BUK9Y3R5-40E	119
BCM847BV	27	BF623	24	BST51	26	BUK7Y12-55B	121	BUK9Y4R4-40E	119
BCM847DS	27	BF720	24	BST52	26	BUK7Y12-100E	125	BUK9Y4R8-60E	121
BCM856BS	27	BF722	24	BST60	26	BUK7Y13-40B	119	BUK9Y6R0-60E	121
BCM856DS	27	BF723	24	BST61	26	BUK7Y14-80E	124	BUK9Y07-30B	118
BCM857BS	27	BF820	24	BST62	26	BUK7Y15-60E	121	BUK9Y7R2-60E	121
BCM857BV	27	BF820W	24	BSV52	23	BUK7Y15-100E	125	BUK9Y7R6-40E	119
BCM857DS	27	BF821	24	BUK7C06-40AITE	128	BUK7Y18-55B	121	BUK9Y8R5-80E	124
BCP51 / -10 / -16	24	BF822	24	BUK7C08-55AITE	129	BUK7Y18-75B	124	BUK9Y8R7-60E	121
BCP52 / -10 / -16	24	BF823	24	BUK7C10-75AITE	129	BUK7Y19-100E	125	BUK9Y09-40B	119
BCP53 / -10 / -16	24	BF824	28	BUK7E1R8-40E	120	BUK7Y20-30B	118	BUK9Y11-30B	118
BCP54 / -10 / -16	24	BF824W	28	BUK7E1R9-40E	120	BUK7Y21-40E	119	BUK9Y11-80E	124
BCP55 / -10 / -16	24	BF840	28	BUK7E2R3-40E	120	BUK7Y22-100E	125	BUK9Y12-40E	119
BCP56 / -10 / -16	24	BFS19	28	BUK7E2R6-60E	123	BUK7Y25-40B	119	BUK9Y12-55B	121
BCP68 / -25	24	BFS20	28	BUK7E3R1-40E	120	BUK7Y25-60E	121	BUK9Y12-100E	125
BCP69 / -16 / -25	24	BFS20W	28	BUK7E3R5-60E	123	BUK7Y25-80E	124	BUK9Y14-40B	119
BCV26	26	BSH111BK	86	BUK7E04-40A	120	BUK7Y28-75B	124	BUK9Y14-80E	124
BCV27	26	BSH205G2	88	BUK7E4R6-60E	123	BUK7Y29-40E	119	BUK9Y15-60E	121
BCV28	26	BSN20BK	86	BUK7E5R2-100E	126	BUK7Y38-100E	125	BUK9Y15-100E	125
BCV29	26	BSP19	24	BUK7E8R3-40E	120	BUK7Y41-80E	124	BUK9Y19-55B	121
BCV46	26	BSP31	24	BUK7E13-60E	123	BUK7Y43-60E	121	BUK9Y19-75B	124
BCV47	26	BSP32 / 33	24	BUK7K5R1-30E	118	BUK7Y53-100B	125	BUK9Y19-100E	125
BCV48	26	BSP41	24	BUK7K5R6-30E	118	BUK7Y59-60E	121	BUK9Y21-40E	119

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
BUK9Y22-30B	118	BUK768R3-60E	122	BUK7507-30B	118	BUK7905-40ATE	128	BUK9609-40B	120
BUK9Y22-100E	125	BUK769R6-80E	124	BUK7507-55B	123	BUK7907-40ATC	129	BUK9609-75A	124
BUK9Y25-60E	121	BUK952R8-30B	118	BUK7508-40B	120	BUK7907-55AIE	129	BUK9610-100B	125
BUK9Y25-80E	124	BUK953R2-40B	120	BUK7508-55A	123	BUK7907-55ATE	129	BUK9611-80E	124
BUK9Y27-40B	119	BUK953R5-60E	123	BUK7509-55A	123	BUK7908-40AIE	129	BUK9612-55B	122
BUK9Y29-40E	119	BUK954R2-55B	123	BUK7509-75A	124	BUK7909-75AIE	129	BUK9614-55A	122
BUK9Y30-75B	124	BUK954R4-40B	120	BUK7510-100B	126	BUK7909-75ATE	129	BUK9614-60E	122
BUK9Y38-100E	125	BUK954R8-60E	123	BUK7511-55B	123	BUK9107-40ATC	129	BUK9615-100A	125
BUK9Y40-55B	121	BUK961R6-40E	119	BUK7513-75B	124	BUK9107-55ATE	129	BUK9615-100E	125
BUK9Y41-80E	124	BUK962R5-60E	122	BUK7515-100A	126	BUK9209-40B	120	BUK9616-55A	122
BUK9Y43-60E	121	BUK962R6-40E	119	BUK7516-55A	123	BUK9212-55B	122	BUK9616-75B	124
BUK9Y53-100B	125	BUK962R8-30B	118	BUK7520-55A	123	BUK9214-30A	118	BUK9620-55A	122
BUK9Y58-75B	124	BUK962R8-60E	122	BUK7520-100A	126	BUK9215-55A	122	BUK9620-100B	125
BUK9Y59-60E	121	BUK963R1-40E	119	BUK7526-100B	126	BUK9217-75B	124	BUK9624-55A	122
BUK9Y65-100E	125	BUK963R2-40B	119	BUK7528-55A	123	BUK9219-55A	122	BUK9628-55A	122
BUK9Y72-80E	124	BUK963R3-60E	122	BUK7528-100A	126	BUK9222-55A	123	BUK9628-100A	126
BUK9Y104-100B	125	BUK964R1-40E	119	BUK7535-55A	123	BUK9225-55A	123	BUK9629-100B	126
BUK9Y107-80E	124	BUK964R2-55B	121	BUK7535-100A	126	BUK9226-75A	124	BUK9635-55A	122
BUK9Y113-100E	125	BUK964R2-60E	122	BUK7575-55A	123	BUK9230-100B	126	BUK9637-100E	126
BUK9Y153-100E	125	BUK964R2-80E	124	BUK7575-100A	126	BUK9237-55A	123	BUK9640-100A	126
BUK714R1-40BT	128	BUK964R4-40B	119	BUK7604-40A	120	BUK9240-100A	126	BUK9660-100A	126
BUK751R8-40E	120	BUK964R7-80E	124	BUK7606-55A	121	BUK9245-55A	123	BUK9675-55A	122
BUK752R3-40E	120	BUK964R8-60E	122	BUK7606-55B	121	BUK9275-100A	126	BUK9675-100A	126
BUK753R1-40E	120	BUK965R4-40E	120	BUK7606-75B	124	BUK9277-55A	123	BUK9907-40ATC	129
BUK753R8-80E	124	BUK965R8-100E	125	BUK7607-30B	118	BUK9504-40A	120	BUK72150-55A	123
BUK754R0-55B	123	BUK966R5-60E	122	BUK7607-55B	121	BUK9506-40B	120	BUK92150-55A	123
BUK755R2-40B	120	BUK969R0-60E	122	BUK7608-40B	120	BUK9506-75B	124	BUK96180-100A	126
BUK755R4-100E	126	BUK969R3-100E	125	BUK7608-55A	122	BUK9507-30B	118	BZA408B	58
BUK758R3-40E	120	BUK6213-30A	118	BUK7609-75A	124	BUK9508-55B	123	BZA420A	58
BUK761R6-40E	120	BUK7105-40AIE	128	BUK7610-55AL	122	BUK9509-40B	120	BZA456A	58
BUK761R7-40E	120	BUK7105-40ATE	128	BUK7610-100B	125	BUK9510-100B	126	BZA462A	58
BUK762R0-40E	119	BUK7107-40ATC	129	BUK7611-55A	122	BUK9511-55A	123	BZA856A	58
BUK762R4-60E	122	BUK7107-55AIE	129	BUK7611-55B	122	BUK9512-55B	123	BZA956A	58
BUK762R6-40E	119	BUK7107-55ATE	129	BUK7613-60E	122	BUK9514-55A	123	BZA962A	58
BUK762R6-60E	122	BUK7108-40AIE	129	BUK7613-75B	124	BUK9515-100A	126	BZA968A	58
BUK762R7-30B	118	BUK7109-75AIE	129	BUK7613-100E	125	BUK9518-55A	123	BZB84 series	40
BUK762R9-40E	119	BUK7109-75ATE	129	BUK7620-55A	122	BUK9520-100A	126	BZB100A	40
BUK763R1-40B	119	BUK7208-40B	120	BUK7620-100A	126	BUK9520-100B	126	BZB784 series	40
BUK763R1-60E	122	BUK7210-55B	122	BUK7623-75A	124	BUK9529-100B	126	BZB984 series	40
BUK763R4-30B	118	BUK7212-55B	122	BUK7624-55A	122	BUK9535-55A	123	BZT52H series	40
BUK763R8-80E	124	BUK7214-75B	124	BUK7626-100B	126	BUK9535-100A	126	BZV49 series	40
BUK763R9-60E	122	BUK7215-55A	122	BUK7628-55A	122	BUK9575-55A	123	BZV55 series	40
BUK764R0-40E	120	BUK7219-55A	123	BUK7628-100A	126	BUK9575-100A	126	BZV85 series	40
BUK764R0-55B	121	BUK7222-55A	123	BUK7631-100E	126	BUK9604-40A	119	BZV90 series	40
BUK764R2-80E	124	BUK7226-75A	124	BUK7635-55A	122	BUK9605-30A	118	BZX79 series	40
BUK764R4-60E	122	BUK7227-100B	126	BUK7635-100A	126	BUK9606-40B	120	BZX84J series	40
BUK765R0-100E	125	BUK7230-55A	123	BUK7640-100A	126	BUK9606-55A	121	BZX84 series	40
BUK765R2-40B	120	BUK7237-55A	123	BUK7660-100A	126	BUK9606-55B	121	BZX84-y2V4	41
BUK765R3-40E	120	BUK7240-100A	126	BUK7675-55A	122	BUK9606-75B	124	BZX84-y2V7	41
BUK766R0-60E	122	BUK7275-100A	126	BUK7675-100A	126	BUK9607-30B	118	BZX84-y3V0	41
BUK768R1-40E	120	BUK7277-55A	123	BUK7905-40AI	128	BUK9608-55A	121	BZX84-y3V3	41
BUK768R1-100E	125	BUK7506-55A	123	BUK7905-40AIE	128	BUK9608-55B	121	BZX84-y3V6	41

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
BZX84-y3V9	41	IP4254CZ12-6-TTL	66	NX3008CBKS	90	NZX5V1B	41
BZX84-y4V3	41	IP4254CZ16-8-TTL	66	NX3008CBKV	90	NZX5V1C	41
BZX84-y4V7	41	IP4264CZ8-20-TTL	67	NX3008NBK	84, 86, 116	NZX5V1D	41
BZX84-y5V1	41	IP4283CZ10-TBR	51, 64	NX3008NBKS	85, 91, 117	NZX5V6A	41
BZX84-y5V6	41	IP4285CZ9-TBB	51, 64	NX3008NBKV	84, 90, 116	NZX5V6B	41
BZX84-y6V2	41	IP4292CZ10-TBR	60, 64	NX3008NBKW	84, 86, 116	NZX5V6C	41
BZX84-y6V8	41	IP4294CZ10-TBR	52, 60, 64	NX3008PBK	84, 88, 116	NZX5V6D	41
BZX84-y7V5	41	IP4302CX2	54	NX3008PBKS	84, 90, 116	NZX5V6E	41
BZX84-y8V2	41	IP4340CX15	67, 135	NX3008PBKV	84, 90, 116	NZX6V2A	41
BZX84-y9V1	41	IP4369CX4	135	NX3008PBKW	84, 88, 116	NZX6V2B	41
BZX84-y10	41	IP4786CZ32	63	NX3020NAK	87	NZX6V2C	41
BZX84-y11	41	IP4786CZ32S	63	NX3020NAKS	91	NZX6V2D	41
BZX84-y12	41	IP4787CZ32	63	NX3020NAKV	91	NZX6V2E	41
BZX84-y13	41	IP4788CZ32	63	NX3020NAKW	87	NZX6V8A	41
BZX84-y15	41	IP4791CZ12	63	NX7002AK	87	NZX6V8B	41
BZX84-y16	41	IP4855CX2S	63	NX7002AKS	91	NZX6V8C	41
BZX84-y18	41	IP4856CX2S/C	63	NX7002AKW	87	NZX6V8D	41
BZX84-y20	41	MMBT2222A	23	NX7002BK	86	NZX7V5A	41
BZX84-y22	41	MMBT3904	23	NX7002BKM	78, 87	NZX7V5B	41
BZX84-y24	41	MMBT3906	23	NX7002BKMB	78, 87	NZX7V5C	41
BZX84-y27	41	MMBZ5V6AL	70	NX7002BKS	91	NZX7V5D	41
BZX84-y30	41	MMBZ6V2AL	70	NX7002BKW	87	NZX7V5X	41
BZX84-y33	41	MMBZ6V8AL	70	NX7002BKXB	79, 91	NZX8V2A	41
BZX84-y36	41	MMBZ9V1AL	70	NXP3875Y / G	22	NZX8V2B	41
BZX84-y39	41	MMBZ10VAL	70	NZH series	40	NZX8V2C	41
BZX84-y43	41	MMBZ12VAL	70	NZX2V1B	41	NZX8V2D	41
BZX84-y47	41	MMBZ12VDL	70	NZX2V4A	41	NZX9V1A	41
BZX84-y51	41	MMBZ15VAL	70	NZX2V4B	41	NZX9V1B	41
BZX84-y56	41	MMBZ15VDL	70	NZX2V7A	41	NZX9V1C	41
BZX84-y62	41	MMBZ18VAL	70	NZX2V7B	41	NZX9V1D	41
BZX84-y68	41	MMBZ18VCL	70	NZX2V7C	41	NZX9V1E	41
BZX84-y75	41	MMBZ20VAL	70	NZX3V0A	41	NZX10A	41
BZX100A	40	MMBZ20VCL	70	NZX3V0B	41	NZX10B	41
BZX384 series	40	MMBZ27VAL	70	NZX3V0C	41	NZX10C	41
BZX585 series	40	MMBZ27VCL	70	NZX3V3A	41	NZX10D	41
BZX884 series	40	MMBZ33VAL	70	NZX3V3B	41	NZX11A	41
IP3319CX6	59, 135	MMBZ33VCL	70	NZX3V3C	41	NZX11B	41
IP4049CX5	135	NCR401T	25	NZX3V6A	41	NZX11C	41
IP4049CX5/LF	67	NCR401U	25	NZX3V6B	41	NZX11D	41
IP4220CZ6	51, 59, 62	NCR402T	25	NZX3V6C	41	NZX12A	41
IP4221CZ6-S	51, 59, 67	NCR402U	25	NZX3V9A	41	NZX12B	41
IP4221CZ6-XS	51, 59, 67	NCR405U	25	NZX3V9B	41	NZX12C	41
IP4251CZ8-4-TTL	66	NUP1301	49	NZX3V9C	41	NZX12D	41
IP4251CZ12-6-TTL	66	NUP1301U	49	NZX4V3A	41	NZX12X	41
IP4251CZ16-8-TTL	66	NX138AK	87	NZX4V3B	41	NZX13A	41
IP4252CZ8-4-TTL	66	NX138AKS	90	NZX4V3C	41	NZX13B	41
IP4252CZ12-6-TTL	66, 67	NX138AKW	86	NZX4V3D	41	NZX13C	41
IP4252CZ16-8-TTL	66	NX138BK	86	NZX4V7A	41	NZX14A	41
IP4253CZ8-4-TTL	66	NX138BKS	90	NZX4V7B	41	NZX14B	41
IP4253CZ12-6-TTL	66	NX138BKW	86	NZX4V7C	41	NZX14C	41
IP4253CZ16-8-TTL	66	NX1029X	90	NZX4V7D	41	NZX15A	41
IP4254CZ8-4-TTL	66	NX2301P	84, 88, 116	NZX5V1A	41	NZX15B	41

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PEMH17	21	PESD3V3U1UA	53	PESD5V0S2UAT	58	PESD6V0L2UU	54	PHB21N06LT	105
PEMH18	21	PESD3V3U1UB	53	PESD5V0S2UQ	58	PESD9V0V4UK	55	PHB27N010T	107
PEMH19	21	PESD3V3U1UL	53	PESD5V0S4UD	58	PESD12VL1BA	53	PHB29N08T	106
PEMH20	21	PESD3V3U1UT	62	PESD5V0S4UF	58	PESD12VL2BT	55	PHB32N06LT	105
PEMH24	21	PESD3V3V4UK	55	PESD5V0S5UD	58	PESD12VS1UA	57, 69	PHB33NQ20T	109
PEMH30	21	PESD3V3V4UW	55	PESD5V0U1BA	54	PESD12VS1UB	57	PHB45NQ10T	107
PEM16CSP-RW	135	PESD3V3X1BCSF	49	PESD5V0U1BB	54	PESD12VS1UJ	57, 69	PHB45NQ15T	108
PEM16CSP/RW	66	PESD3V3X1BL	49	PESD5V0U1BL	54	PESD12VS1UL	57	PHB47NQ10T	107
PEM18CSP-RW-P	135	PESD5V0C1BSF	49, 60	PESD5V0U1BLD	54	PESD12VS1ULD	57	PHB66NQ03LT	101
PEM18CSP/RW/P	66	PESD5V0C1USF	49, 60	PESD5V0U1UA	53	PESD12VS2UQ	58	PHB110NQ08T	106
PEMT1	23	PESD5V0F1BL	49	PESD5V0U1UB	53	PESD12VS2UT	58	PHB191NQ06LT	105
PEMX1	23	PESD5V0F1BLD	49	PESD5V0U1UL	53	PESD12VS5UD	58	PHC2300	108
PEMZ1	23	PESD5V0F1BRLD	49	PESD5V0U1UT	62	PESD12VU1UT	62	PHC21025	108
PEMZ7	23	PESD5V0F1BRF	49	PESD5V0U2BM	55	PESD12VW1BL	54	PHD9NQ20T	109
PESD1CAN	68	PESD5V0F1BSF	49	PESD5V0U2BMB	55	PESD15VL1BA	53	PHD20N06T	105
PESD1CAN-U	68	PESD5V0F1BSH	48, 49	PESD5V0U2BT	55	PESD15VL2BT	55	PHD38N02LT	101
PESD1FLEX	68	PESD5V0F1USF	49	PESD5V0U4BF	56	PESD15VS1UB	57	PHD71NQ03LT	103
PESD11VN-U	68	PESD5V0F5UF	52	PESD5V0U4BW	56	PESD15VS1UL	57	PHD97NQ03LT	101
PESD1LIN	68	PESD5V0F5UV	52	PESD5V0U5BF	56	PESD15VS1ULD	57	PHD101NQ03LT	103
PESD1LVDS	68	PESD5V0H1BSF	49, 60	PESD5V0U5BV	56	PESD15VS2UAT	58	PHDMI2F4	64
PESD1NFC-L	65	PESD5V0L1BA	53	PESD5V0V1BA	54	PESD15VS2UQ	58	PHK04P02T	108
PESD1NFC-SF	65	PESD5V0L1BSF	53	PESD5V0V1BB	54	PESD15VS2UT	58	PHK5NQ15T	108
PESD1USB3S	60, 61	PESD5V0L1UA	53	PESD5V0V1BCSF	54	PESD15VS5UD	58	PHK12NQ03LT	103
PESD2CAN	68	PESD5V0L1UB	53	PESD5V0V1BDSF	54	PESD15VU1UT	62	PHK13NQ03LT	103
PESD21VN-U	68	PESD5V0L1UL	53	PESD5V0V1BL	54	PESD16VX1UL	49	PHK18NQ03LT	103
PESD2LVDS	68	PESD5V0L1ULD	53	PESD5V0V1BLD	54	PESD18VF1BL	49, 65	PHK31NQ03LT	103
PESD2NFC-L	65	PESD5V0L1USF	53	PESD5V0V1BSF	54	PESD18VF1BSF	49, 65	PHKD3NQ10T	107, 108
PESD2NFC-SF	65	PESD5V0L2BT	55	PESD5V0V2BM	55, 67, 69	PESD24VF1BL	49, 65	PHKD6N02LT	108
PESD2USB3S	61	PESD5V0L2UM	54	PESD5V0V2BMB	55, 67, 69	PESD24VF1BSF	49, 65	PHK12NQ03LT	103
PESD3USB3S	61	PESD5V0L2UMB	54	PESD5V0V4UK	55	PESD24VL1BA	53	PHN203	108
PESD3V3C1BSF	49	PESD5V0L2UU	54	PESD5V0V4UW	55	PESD24VL2BT	55	PHN210T	108
PESD3V3CIBSF	60	PESD5V0L4UF	55	PESD5V0X1BCAL	49	PESD24VS1UA	57	PHP9NQ20T	109
PESD3V3L1BA	53	PESD5V0L4UG	55	PESD5V0X1BCL	49	PESD24VS1UB	57	PHP18NQ10T	107
PESD3V3L1UB	53	PESD5V0L4UW	55	PESD5V0X1BCSF	49	PESD24VS1UL	57	PHP18NQ11T	108
PESD3V3L1UL	53	PESD5V0L5UF	56	PESD5V0X1BL	49	PESD24VS1ULD	57	PHP20N06T	105
PESD3V3L2BT	55	PESD5V0L5UK	56	PESD5V0X1BQ	50	PESD24VS2UAT	58	PHP20NQ20T	109
PESD3V3L2UM	54	PESD5V0L5UV	56	PESD5V0X1BT	50	PESD24VS2UQ	58	PHP23NQ11T	108
PESD3V3L4UF	55	PESD5V0L5UY	56	PESD5V0X1UAB	49	PESD24VS2UT	58	PHP27NQ11T	108
PESD3V3L4UG	55	PESD5V0R1BSF	49, 60	PESD5V0X1UALD	49	PESD24VS4UD	58	PHP28NQ15T	108
PESD3V3L4UW	55	PESD5V0S1BA	57	PESD5V0X1UB	49	PESD24VS5UD	58	PHP29N08T	106
PESD3V3L5UF	56	PESD5V0S1BB	57	PESD5V0X1ULD	49	PESD24VU1UT	62	PHP30NQ15T	108
PESD3V3L5UK	56	PESD5V0S1BL	57	PESD5V0X2UAM	50	PESD36VS1UL	57	PHP33NQ20T	109
PESD3V3L5UV	56	PESD5V0S1BLD	57	PESD5V0X2UAMB	50	PESD36VS2UT	58	PHP36N03LT	103
PESD3V3L5UY	56	PESD5V0S1BSF	57	PESD5V0X2UM	50	PH955L	105	PHP45NQ10T	107
PESD3V3S1UB	57	PESD5V0S1UA	57, 69	PESD5V0X2UMB	50	PH2520U	101	PHP45NQ11T	108
PESD3V3S1UL	57	PESD5V0S1UB	57	PESD5V2S2UT	58	PH2925U	101	PHP79NQ08LT	106
PESD3V3S2UAT	58	PESD5V0S1UJ	57, 69	PESD5Z2.5	57	PH3120L	101	PHP191NQ06LT	105
PESD3V3S2UQ	58	PESD5V0S1UL	57	PESD5Z3.3	57	PH4840S	104	PHP225	108
PESD3V3S2UT	58	PESD5V0S1ULD	57	PESD5Z5.0	57	PH20100S	107	PHPT60406NY	10
PESD3V3S4UD	58	PESD5V0S1USF	57	PESD5Z6.0	57	PHB18NQ10T	107	PHPT60406PY	10
PESD3V3S4UF	58	PESD5V0S2BOA	58, 69	PESD5Z7.0	57	PHB20N06T	105	PHPT60410NY	10
PESD3V3S5UD	58	PESD5V0S2BT	55	PESD5Z12	57	PHB20NQ20T	109	PHPT60410PY	10

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PHPT60415NY	10	PMBT4403YS	23	PMEG505T150EPD	33	PMEG2020AEA	36	PMEG3020EP	33
PHPT60415PY	10	PMBT5550	24	PMEG505V150EPD	33	PMEG2020CPA	37	PMEG3020EPA	35
PHPT60603NY	10	PMBT5551 / BSR19A	24	PMEG606V050EPD	33	PMEG2020CPAS	37	PMEG3020EPAS	35
PHPT60603PY	10	PMBT6428	22	PMEG606V100EPD	33	PMEG2020EH	36	PMEG3020ER	33
PHPT60606NY	10	PMBT6429	22	PMEG100V060ELPD	33	PMEG2020EJ	36	PMEG3030BEP	33
PHPT60606PY	10	PMBTA06	22	PMEG100V080ELPD	33	PMEG2020EPA	35	PMEG3030EP	33
PHPT60610NY	10	PMBTA13	26	PMEG100V100ELPD	33	PMEG2020EPAS	35	PMEG3050BEP	33
PHPT60610PY	10	PMBTA14	26	PMEG1020EA	36	PMEG2020EPK	35	PMEG3050EP	33
PHPT61002NYC	10	PMBTA42	24	PMEG1020EH	36	PMEG3002AEB	36	PMEG4002AESF	34
PHPT61002PYC	10	PMBTA42DS	24	PMEG1020EJ	36	PMEG3002AEL	35	PMEG4002EB	36
PHPT61003NPK	10	PMBTA44	24	PMEG1020EV	36	PMEG3002AELD	35	PMEG4002EJ	36
PHPT61003NY	10	PMBTA45	18	PMEG1030EH	36	PMEG3002AESF	34	PMEG4002EL	35
PHPT61003PY	10	PMBTA56	22	PMEG1030EJ	36	PMEG3002EJ	36	PMEG4002ELD	35
PHPT61006NY	10	PMBTA64	26	PMEG2002AESF	34	PMEG3002ESF	34	PMEG4002ESF	34
PHPT61006PY	10	PMBTA92	24	PMEG2002ESF	34	PMEG3002TV	37	PMEG4005AEA	36
PHPT61010NY	10	PMC85XP	81	PMEG2005AEA	36	PMEG3005AEA	36	PMEG4005AESF	34
PHPT61010PY	10	PMCMA440VNE	82, 135	PMEG2005AEL	35	PMEG3005AESF	34	PMEG4005AEV	36
PHPT610030NK	10	PMCMA440VPE	135	PMEG2005AELD	35	PMEG3005AEV	36	PMEG4005CT	37
PHPT610030PK	10	PMCMA650VNE	82, 135	PMEG2005AESF	34	PMEG3005CT	37	PMEG4005EH	36
PHPT610035NK	10, 27	PMCMA650VPE	135	PMEG2005AEV	36	PMEG3005EB	36	PMEG4005EJ	36
PHPT610035PK	10, 27	PMCMA4401VNE	82, 135	PMEG2005BELD	35	PMEG3005EH	36	PMEG4005EPK	35
PHT4NQ10T	107	PMCMA4401VPE	82, 135	PMEG2005CT	37	PMEG3005EJ	36	PMEG4005ESF	34
PHT6NQ10T	107	PMCMA6501VNE	82	PMEG2005EB	36	PMEG3005EL	35	PMEG4005ET	36
PIMT1	23	PMCMA6501VPE	82	PMEG2005EH	36	PMEG3005ELD	35	PMEG4010AESB	34
PIMZ2	23	PMCPCB5530X	81, 90	PMEG2005EJ	36	PMEG3005ESF	34	PMEG4010BEA	36
PLVA600A series	40	PMCXB900UE	79, 90	PMEG2005EL	35	PMEG3005ET	36	PMEG4010BEV	36
PMBD353	39	PMCXB1000UE	79, 90	PMEG2005ELD	35	PMEG3010AESA	34	PMEG4010CEH	36
PMBD354	39	PMD2001D	28	PMEG2005EPK	35	PMEG3010AESB	34	PMEG4010CEJ	36
PMB53904	23	PMD3001D	28	PMEG2005ESF	34	PMEG3010BEA	36	PMEG4010CPA	37
PMB53906	23	PMDPB30XN	81, 90	PMEG2005ET	36	PMEG3010BEP	33	PMEG4010CPAS	37
PMBT2222	23	PMDPB55XP	81, 90	PMEG2010AEB	36	PMEG3010BER	33	PMEG4010EH	36
PMBT2222A	23	PMDPB56XNEA	81, 84, 90, 116	PMEG2010AEH	36	PMEG3010BEV	36	PMEG4010EJ	36
PMBT2222AYS	23	PMDPB58UPE	81, 90	PMEG2010AEJ	36	PMEG3010CEH	36	PMEG4010EP	33
PMBT2369	23	PMDPB70XP	81, 90	PMEG2010AET	36	PMEG3010CEJ	36	PMEG4010EPK	35
PMBT2907	23	PMDPB70XPE	81, 90	PMEG2010BEA	36	PMEG3010CEH	36	PMEG4010EP	33
PMBT2907A	23	PMDPB80XP	81, 90	PMEG2010BEV	36	PMEG3010CEJ	36	PMEG4010ER	33
PMBT3904	23	PMDPB85UPE	81, 90	PMEG2010BELD	35	PMEG3010CEH	36	PMEG4010ET	33
PMBT3904M	23	PMDPB85UPE	81, 90	PMEG2010BER	33	PMEG3010CEH	36	PMEG4010ET	33
PMBT3904MB	23	PMDPB95XNE2	81, 90	PMEG2010BEV	36	PMEG3010CEJ	36	PMEG4010EJ	36
PMBT3904VS	23	PMDT290UCE	90	PMEG2010EA	36	PMEG3010CEH	36	PMEG4010EP	33
PMBT3904YS	23	PMDT290UNE	84, 90, 116	PMEG2010EA	36	PMEG3010CEH	36	PMEG4010EP	33
PMBT3906	23	PMDT670UPE	84, 90, 116	PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT3906M	23	PMDXB550UNE	79, 90	PMEG2010EPAS	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT3906MB	23	PMDXB600UNE	79, 90	PMEG2010EPK	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT3906VS	23	PMDXB950UPE	79, 90	PMEG2010ER	33	PMEG3010CEH	36	PMEG4010EP	33
PMBT3906YS	23	PMDXB1200UPE	79, 90	PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT3946VFN	23	PMEG45A10EPD	33	PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT3946VFN	23	PMEG45T15EPD	33	PMEG2010EPAS	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT4401	23	PMEG4045V100EPD	33	PMEG2010EPK	35	PMEG3010CEH	36	PMEG4010EP	33
PMBT4401YS	23	PMEG4045V100EPD	33	PMEG2010ER	33	PMEG3010CEH	36	PMEG4010EP	33
PMBT4403	23	PMEG4045V150EPD	33	PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPAS	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPK	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010ER	33	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPAS	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPK	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010ER	33	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPAS	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPK	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010ER	33	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPA	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPAS	35	PMEG3010CEH	36	PMEG4010EP	33
				PMEG2010EPK	35	PMEG3010CEH	36	PMEG4010EP	33

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PMEG6002EB	36	PMN28UNEA	84, 86, 116	PMPB33XN	81	PMV50EPEA	84, 88, 116	PQMD2	21
PMEG6002EJ	36	PMN30UN	86	PMPB33XP	81	PMV50UPE	88	PQMD3	21
PMEG6002ELD	35	PMN30UNE	86	PMPB43XPE	81	PMV50XP	88	PQMD10	21
PMEG6002TV	37	PMN30XP	88	PMPB47XP	81	PMV55ENEA	84, 86, 116	PQMD12	21
PMEG6010AED	36	PMN30XPEA	84, 88, 116	PMPB48EP	81	PMV65ENEA	84, 86, 116	PQMD13	21
PMEG6010AESB	34	PMN34UP	88	PMPB55ENEA	81, 84, 116	PMV65UNE	86	PQMD16	21
PMEG6010CEH	36	PMN40ENE	86	PMPB85ENEA	81, 84, 116	PMV65XP	88	PQMH2	21
PMEG6010CEJ	36	PMN40UPE	88	PMPB95ENEA	81, 84, 116	PMV65XPE	88	PQMH9	21
PMEG6010CPA	37	PMN40UPEA	84, 116	PMPB215ENEA	81, 84, 116	PMV65XPEA	84, 116	PQMH10	21
PMEG6010CPAS	37	PMN42XPE	88	PMSS3904	23	PMV75UP	88	PQMH11	21
PMEG6010ELR	33	PMN42XPEA	84, 116	PMSS3906	23	PMV90ENE	86	PQMH13	21
PMEG6010EP	33	PMN48XP	88	PMST2222	23	PMV100ENEA	84, 116	PRTSR5V0U2AX	50, 59
PMEG6010ER	33	PMN48XPA	84, 116	PMST2222A	23	PMV100EPEA	84, 88, 116	PRTSR5V0U2F	50, 59
PMEG6010ESB	34	PMN50EPEA	84, 88, 116	PMST2369	23	PMV100XPEA	84, 88, 116	PRTSR5V0U2X	50, 59
PMEG6010ETR	33	PMN50UPE	88	PMST2907A	23	PMV120ENEA	84, 86, 116	PRTSR5V0U4D	51, 59, 68
PMEG6020AELP	33	PMN52XP	88	PMST3904	23	PMV130ENEA	84, 86, 116	PSMNR09-25YLC	101
PMEG6020AELR	33	PMN55ENEA	84, 86, 116	PMST3906	23	PMV160UP	88	PSMNR09-30YLD	95, 100, 102
PMEG6020ELR	33	PMN70EPE	88	PMST4401	23	PMV230ENEA	84, 86, 116	PSMNR10-30YLC	102
PMEG6020EP	33	PMN70XP	88	PMST4403	23	PMV240EPEA	84, 88, 116	PSMNR10-30YLD	95, 100, 102
PMEG6020EPA	35	PMN70XPE	88	PMST5088	22	PMV250EPEA	84, 88, 116	PSMNR10-40YLD	95, 104
PMEG6020EPAS	35	PMN70XPEA	84, 116	PMST5089	22	PMV450ENEA	84, 86, 116	PSMNR11-25YLC	101
PMEG6020ER	33	PMN80XP	88	PMST5550	24	PMXB40UNE	79	PSMNR11-30EL	103
PMEG6020ETP	33	PMN100EPEA	84, 88, 116	PMST5551	24	PMXB43UNE	79	PSMNR11-30PL	103
PMEG6020ETR	33	PMN120ENEA	84, 86, 116	PMST6428	22	PMXB56EN	79	PSMNR11-40BS	104
PMEG6030ELP	33	PMN230ENEA	84, 86, 116	PMST6429	22	PMXB65ENE	79	PSMNR12-25YL	101
PMEG6030EP	33	PMN240EPEA	84, 88, 116	PMSTA05	22	PMXB65UPE	79	PSMNR12-25YLC	101
PMEG6030ETP	33	PMP4201G	27	PMSTA06	22	PMXB75UPE	79	PSMNR12-30YLC	102
PMEG6030EVP	33	PMP4201V	27	PMSTA42	24	PMXB120EPE	79	PSMNR12-30YLD	95, 102
PMEG6045ETP	33	PMP4201Y	27	PMSTA55	22	PMXB350UPE	79	PSMNR13-30YL	102
PMEG10010ELR	33	PMP4501G	27	PMSTA56	22	PMXB360ENEA	79, 84, 116	PSMNR14-30YLD	95, 102
PMEG10020AELP	33	PMP4501V	27	PMSTA92	24	PMZ130UNE	78, 86	PSMNR14-40YLD	95, 104
PMEG10020AELR	33	PMP4501Y	27	PMT200EPEA	84, 88, 116	PMZ200UNE	78, 86	PSMNR15-25YL	101
PMEG10020ELR	33	PMP5201G	27	PMT280ENEA	84, 86, 116	PMZ290UNE2	78, 86	PSMNR15-30BLE	98, 102
PMEG10030ELP	33	PMP5201V	27	PMT560ENEA	84, 86, 116	PMZ320UPE	78, 88	PSMNR15-30YL	102
PMF63UNE	86	PMP5201Y	27	PMV16XN	86	PMZ350UPE	78, 88	PSMNR15-30YLC	102
PMF170XP	88	PMP5501G	27	PMV20EN	86	PMZ390UNE	78, 86	PSMNR15-40ES	104
PMF250XNE	86	PMP5501V	27	PMV20XNE	86	PMZ550UNE	78, 86	PSMNR15-40PS	100, 104
PMFFB8032XP	81, 88	PMP5501Y	27	PMV20XNEA	84, 86, 116	PMZ600UNE	78, 86	PSMNR16-30BL	102
PMFFB8040XP	81, 88	PMPB10XNE	80, 81	PMV25ENEA	84, 86, 116	PMZ950UPE	78, 88	PSMNR16-30PL	103
PMG85XP	88	PMPB11EN	81	PMV27UPE	88	PMZ1200UNE	78	PSMNR16-40YLC	104
PMGD175XNE	90	PMPB12UNE	81	PMV27UPEA	84, 116	PMZ1200UPE	88	PSMNR17-30YL	102
PMGD290UCEA	84, 116	PMPB13XNE	81	PMV28UNEA	84, 86, 116	PMZB150UNE	78, 86	PSMNR17-60BS	105
PMK30EP	108	PMPB15XN	81	PMV30UN2	86	PMZB200UNE	78, 86	PSMNR18-30BL	102
PMK35EP	108	PMPB15XP	80, 81	PMV30XPEA	84, 88, 116	PMZB290UNE2	78, 86	PSMNR18-30PL	103
PMK50XP	108	PMPB19XP	81	PMV32UP	88	PMZB320UPE	78, 88	PSMNR18-40YLC	104
PMMT491A	14	PMPB20EN	80, 81	PMV33UPE	88	PMZB350UPE	78, 88	PSMNR19-40PL	100, 104
PMMT591A	15	PMPB20XNEA	81, 84, 116	PMV37EN2	86	PMZB390UNE	78, 86	PSMNR20-30BL	102
PMN16XNE	86	PMPB20XPE	81	PMV40UN2	86	PMZB550UNE	78, 86	PSMNR20-30PL	103
PMN25ENEA	84, 86, 116	PMPB23XNE	81	PMV45EN2	86	PMZB600UNE	78, 86	PSMNR20-30YL	100, 102
PMN27UP	88	PMPB27EP	81	PMV48XP	88	PMZB950UPE	78, 88	PSMNR20-30YLE	98, 100, 102
PMN27XPE	88	PMPB29XNE	81	PMV48XPA	84, 116	PMZB1200UPE	78, 88	PSMNR20-60ES	105
PMN27XPEA	84, 116	PMPB29XPE	81	PMV50ENEA	84, 86, 116	PNS40010ER	43	PSMNR20-60PS	105

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PSMN2R1-40PL	100, 104	PSMN4R3-30PL	103	PSMN7R6-100BSE	98, 107	PSMN017-30BL	102	PTVSSV0P1UTP	72
PSMN2R2-25YLC	101	PSMN4R3-80ES	106	PSMN7R8-100PSE	98, 107	PSMN017-30EL	103	PTVSSV0S1UR	71
PSMN2R2-30YLC	102	PSMN4R3-80PS	106	PSMN7R8-120ES	108	PSMN017-30PL	103	PTVSSV0S1UTR	71
PSMN2R2-40BS	104	PSMN4R3-100ES	107	PSMN7R8-120PS	108	PSMN017-60YS	105	PTVSSV0Z1USK	69
PSMN2R2-40PS	100, 104	PSMN4R3-100PS	107	PSMN008-75B	106	PSMN017-80BS	106	PTVSSV0Z1USKN	69
PSMN2R4-30MLD	95, 102	PSMN4R4-30MLC	102	PSMN8R0-40BS	104	PSMN017-80PS	106	PTVSSV0P1UP	72
PSMN2R4-30YLD	95, 102	PSMN4R4-80BS	106	PSMN8R0-40PS	104	PSMN018-80YS	106	PTVSSV0P1UTP	72
PSMN2R5-30YL	100, 102	PSMN4R4-80PS	106	PSMN8R0-80YL	106	PSMN019-100YL	107	PTVSSV0S1UR	71
PSMN2R5-60PL	100, 105	PSMN4R5-30YLC	102	PSMN8R2-80YS	106	PSMN020-30MLC	102	PTVSSV0S1UTR	71
PSMN2R6-30YLC	100, 102	PSMN4R5-40BS	104	PSMN8R3-40YS	104	PSMN020-100YS	107	PTVSSV5P1UP	72
PSMN2R6-40YS	104	PSMN4R5-40PS	104	PSMN8R5-60YS	105	PSMN021-100YL	107	PTVSSV5P1UTP	72
PSMN2R6-60PS	100, 105	PSMN4R6-60BS	105	PSMN8R5-100ES	107	PSMN022-30BL	102	PTVSSV5S1UR	71
PSMN2R7-30BL	102	PSMN4R6-60PS	105	PSMN8R5-100PS	107	PSMN022-30PL	103	PTVSSV5S1UTR	71
PSMN2R7-30PL	103	PSMN4R8-100BSE	98, 107	PSMN8R7-80BS	106	PSMN025-80YL	106	PTVSV0P1UP	72
PSMN2R8-25MLC	101	PSMN4R8-100PSE	98, 107	PSMN8R7-80PS	106	PSMN025-100D	107	PTVSV0P1UTP	72
PSMN2R8-40BS	104	PSMN005-30K	103	PSMN009-100B	107	PSMN026-80YS	106	PTVSV7V0S1UR	71
PSMN2R8-40PS	104	PSMN005-75B	106	PSMN009-100P	107	PSMN027-100BS	107	PTVSV7V0S1UTR	71
PSMN2R8-80BS	106	PSMN005-75P	106	PSMN9R0-25MLC	101	PSMN027-100PS	107	PTVSV7V5P1UP	72
PSMN2R9-25YLC	101	PSMN5R0-30YL	102	PSMN9R1-30YL	102	PSMN028-100YS	107	PTVSV7V5P1UTP	72
PSMN2R9-30MLC	102	PSMN5R0-80BS	106	PSMN9R5-30YLC	102	PSMN030-60YS	105	PTVSV7V5S1UR	71
PSMN3R0-30MLC	102	PSMN5R0-80PS	106	PSMN9R5-100BS	107	PSMN030-150B	108	PTVSV7V5S1UTR	71
PSMN3R0-30YL	102	PSMN5R0-100ES	107	PSMN9R5-100PS	107	PSMN030-150P	108	PTVSV7V5U1UPA	70
PSMN3R0-30YLD	95, 102	PSMN5R0-100PS	107	PSMN9R8-30MLC	102	PSMN034-100BS	107	PTVSV7V5Z1USK	69
PSMN3R0-60BS	105	PSMN5R2-60YL	105	PSMN010-80YL	106	PSMN034-100PS	107	PTVSV7V5Z1USKN	69
PSMN3R0-60ES	105	PSMN5R5-60YS	105	PSMN011-30YLC	102	PSMN035-150B	108	PTVSV8V0P1UP	72
PSMN3R0-60PS	105	PSMN5R6-60YL	105	PSMN011-60ML	105	PSMN035-150P	108	PTVSV8V0P1UTP	72
PSMN3R2-30YLC	102	PSMN5R6-100BS	107	PSMN011-60MS	105	PSMN038-100K	107	PTVSV8V0S1UR	71
PSMN3R3-40YS	104	PSMN5R6-100PS	107	PSMN011-80YS	106	PSMN038-100YL	107	PTVSV8V0S1UTR	71
PSMN3R3-60PL	100, 105	PSMN5R8-40YS	104	PSMN012-60YS	105	PSMN039-100YS	107	PTVSV8V5P1UP	72
PSMN3R3-80BS	106	PSMN006-20K	101	PSMN012-80BS	106	PSMN040-100MSE	98, 107	PTVSV8V5P1UTP	72
PSMN3R3-80ES	106	PSMN6R0-25YLB	101	PSMN012-80PS	106	PSMN041-80YL	106	PTVSV8V5S1UR	71
PSMN3R3-80PS	106	PSMN6R0-30YL	102	PSMN012-100YL	107	PSMN045-80YS	106	PTVSV8V5S1UTR	71
PSMN3R4-30BL	102	PSMN6R0-30YLB	102	PSMN012-100YS	107	PSMN050-80BS	106	PTVSV9V0P1UP	72
PSMN3R4-30BLE	98, 102	PSMN6R0-30YLD	95, 102	PSMN013-30MLC	102	PSMN057-200B	109	PTVSV9V0P1UTP	72
PSMN3R4-30PL	103	PSMN6R1-30YLD	95, 102	PSMN013-30YLC	102	PSMN057-200P	109	PTVSV9V0S1UR	71
PSMN3R5-30YL	102	PSMN6R3-120ES	108	PSMN013-60YL	105	PSMN059-150Y	108	PTVSV9V0S1UTR	71
PSMN3R5-80ES	106	PSMN6R3-120PS	108	PSMN013-80YS	106	PSMN063-150D	108	PTVSV10V1UP	72
PSMN3R5-80PS	106	PSMN6R5-25YLC	101	PSMN013-100BS	107	PSMN069-100YS	107	PTVSV10V1UTP	72
PSMN3R8-100BS	107	PSMN6R5-80BS	106	PSMN013-100ES	107	PSMN070-200B	109	PTVSV10V1UTR	71
PSMN3R9-25MLC	101	PSMN6R5-80PS	106	PSMN013-100PS	107	PSMN070-200P	109	PTVSV10V1UTR	71
PSMN3R9-60PS	100, 105	PSMN7R0-30MLC	102	PSMN013-100YSE	98, 107	PSMN075-100MSE	98, 107	PTVSV10VU1UPA	70
PSMN004-60B	105	PSMN7R0-30YL	102	PSMN014-40YS	104	PSMN085-150K	108	PTVSV10VZ1USK	69
PSMN4R0-25YLC	101	PSMN7R0-30YLC	102	PSMN014-80YL	106	PSMN102-200Y	109	PTVSV10VZ1USKN	69
PSMN4R0-30YL	102	PSMN7R0-60YS	105	PSMN015-60BS	105	PSMN130-200D	109	PTVSV11VP1UP	72
PSMN4R0-30YLD	95, 102	PSMN7R0-100BS	107	PSMN015-60PS	105	PSMN165-200K	109	PTVSV11VP1UTP	72
PSMN4R0-40YS	104	PSMN7R0-100ES	107	PSMN015-100B	107	PSMNR90-30BL	102	PTVSV11VS1UR	71
PSMN4R0-60YS	105	PSMN7R0-100PS	107	PSMN015-100P	107	PSSI2021SAY	25	PTVSV11VS1UTR	71
PSMN4R1-30YLC	102	PSMN7R5-30MLD	95, 102	PSMN015-100YL	107	PTVSV3V3P1UP	72	PTVSV12VP1UP	72
PSMN4R1-60YL	105	PSMN7R5-30YLD	95, 102	PSMN015-110P	108	PTVSV3V3P1UTP	72	PTVSV12VP1UTP	72
PSMN4R2-30MLD	95, 102	PSMN7R5-60YL	105	PSMN016-100BS	107	PTVSV3V3S1UR	71	PTVSV12VS1UR	71
PSMN4R2-60PL	100, 105	PSMN7R6-60BS	105	PSMN016-100PS	107	PTVSV3V3S1UTR	71	PTVSV12VS1UTR	71
PSMN4R3-30BL	102	PSMN7R6-60PS	100, 105	PSMN016-100YS	107	PTVSV5V0P1UP	72	PTVSV12VU1UPA	70

Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number	Type Number	Page Number
PTVS12VZ1USK	69	PTVS26VZ1USKN	69	PTVS64VS1UTR	71	PUMH30	21	PZU14y	41
PTVS12VZ1USKN	69	PTVS28VP1UP	72	PUMB1	21	PUMT1	23	PZU15y	41
PTVS13VP1UP	72	PTVS28VP1UTP	72	PUMB2	21	PUMX1	23	PZU16y	41
PTVS13VP1UTP	72	PTVS28VS1UR	71	PUMB3	21	PUMX2	23	PZU18y	41
PTVS13VS1UR	71	PTVS28VS1UTR	71	PUMB4	21	PUMZ1	23	PZU20y	41
PTVS13VS1UTR	71	PTVS30VP1UP	72	PUMB9	21	PUMZ2	23	PZU22y	41
PTVS14VP1UP	72	PTVS30VP1UTP	72	PUMB10	21	PUSB2X4D	51, 59, 64	PZU24y	41
PTVS14VP1UTP	72	PTVS30VS1UR	71	PUMB11	21	PUSB2X4Y	51, 59, 64	PZU27y	41
PTVS14VS1UR	71	PTVS30VS1UTR	71	PUMB13	21	PUSB3AB4	52, 60	PZU30y	41
PTVS14VS1UTR	71	PTVS33VP1UP	72	PUMB14	21	PUSB3AB6	52, 60, 67	PZU33y	41
PTVS15VP1UP	72	PTVS33VP1UTP	72	PUMB15	21	PUSB3F96	52, 60	PZU36y	41
PTVS15VP1UTP	72	PTVS33VS1UR	71	PUMB16	21	PUSB3FR4	52, 60	PZUxBA series	40
PTVS15VS1UR	71	PTVS33VS1UTR	71	PUMB17	21	PUSB3FR6	52, 60, 67	PZUxBL series	40
PTVS15VS1UTR	71	PTVS36VP1UP	72	PUMB18	21	PUSB3TB6	52, 60, 67	PZUxB series	40
PTVS15VU1UPA	70	PTVS36VP1UTP	72	PUMB19	21	PUSBM5V5X4-TL	59	RB520CS30L	38
PTVS15VZ1USK	69	PTVS36VS1UR	71	PUMB20	21	PUSBM12VX4-TL	59	RB520S30	38
PTVS15VZ1USKN	69	PTVS36VS1UTR	71	PUMB24	21	PUSBM30VX4-TL	59	RB521CS30L	38
PTVS16VP1UP	72	PTVS40VP1UP	72	PUMB30	21	PXT2222A	23	RB521S30	38
PTVS16VP1UTP	72	PTVS40VP1UTP	72	PUMD2	21	PXT2907A	23	RB751CS40	38
PTVS16VS1UR	71	PTVS40VS1UR	71	PUMD3	21	PXT4401	23	RB751S40	38
PTVS16VS1UTR	71	PTVS40VS1UTR	71	PUMD4	21	PXT4403	23	RB751V40	38
PTVS17VP1UP	72	PTVS43VP1UP	72	PUMD6	21	PXTA14	26	TDZxJ series	40
PTVS17VP1UTP	72	PTVS43VP1UTP	72	PUMD9	21	PXTA42	24		
PTVS17VS1UR	71	PTVS43VS1UR	71	PUMD10	21	PXTA92	24		
PTVS17VS1UTR	71	PTVS43VS1UTR	71	PUMD12	21	PZT2222A	23		
PTVS18VP1UP	72	PTVS45VP1UP	72	PUMD13	21	PZT2907A	23		
PTVS18VP1UTP	72	PTVS45VP1UTP	72	PUMD14	21	PZT4401	23		
PTVS18VS1UR	71	PTVS45VS1UR	71	PUMD15	21	PZT4403	23		
PTVS18VS1UTR	71	PTVS45VS1UTR	71	PUMD16	21	PZTA14	26		
PTVS18VU1UPA	70	PTVS48VP1UP	72	PUMD17	21	PZTA42	24		
PTVS18VZ1USK	69	PTVS48VP1UTP	72	PUMD18	21	PZTA44	24		
PTVS18VZ1USKN	69	PTVS48VS1UR	71	PUMD19	21	PZTA92	24		
PTVS20VP1UP	72	PTVS48VS1UTR	71	PUMD20	21	PZU2.4y	41		
PTVS20VP1UTP	72	PTVS51VP1UP	72	PUMD24	21	PZU2.7y	41		
PTVS20VS1UR	71	PTVS51VP1UTP	72	PUMD30	21	PZU3.0y	41		
PTVS20VS1UTR	71	PTVS51VS1UR	71	PUMD48	21	PZU3.3y	41		
PTVS20VZ1USK	69	PTVS51VS1UTR	71	PUMH1	21	PZU3.6y	41		
PTVS20VZ1USKN	69	PTVS54VP1UP	72	PUMH2	21	PZU3.9y	41		
PTVS22VP1UP	72	PTVS54VP1UTP	72	PUMH4	21	PZU4.3y	41		
PTVS22VP1UTP	72	PTVS54VS1UR	71	PUMH7	21	PZU4.7y	41		
PTVS22VS1UR	71	PTVS54VS1UTR	71	PUMH9	21	PZU5.1y	41		
PTVS22VS1UTR	71	PTVS58VP1UP	72	PUMH10	21	PZU5.6y	41		
PTVS24VP1UP	72	PTVS58VP1UTP	72	PUMH11	21	PZU6.2y	41		
PTVS24VP1UTP	72	PTVS58VS1UR	71	PUMH13	21	PZU6.8y	41		
PTVS24VS1UR	71	PTVS58VS1UTR	71	PUMH14	21	PZU7.5y	41		
PTVS24VS1UTR	71	PTVS60VP1UP	72	PUMH15	21	PZU8.2y	41		
PTVS26VP1UP	72	PTVS60VP1UTP	72	PUMH16	21	PZU9.1y	41		
PTVS26VP1UTP	72	PTVS60VS1UR	71	PUMH17	21	PZU10DB2 series	40		
PTVS26VS1UR	71	PTVS60VS1UTR	71	PUMH18	21	PZU10y	41		
PTVS26VS1UTR	71	PTVS64VP1UP	72	PUMH19	21	PZU11y	41		
PTVS26VU1UPA	70	PTVS64VP1UTP	72	PUMH20	21	PZU12y	41		
PTVS26VZ1USK	69	PTVS64VS1UR	71	PUMH24	21	PZU13y	41		



To help you achieve the best, most efficient design with our products, we offer a wide variety of support tools, available on the NXP Semiconductors website www.nxp.com.



Models and test data



Sales offices and distributors

Dedicated and skilled sales and distribution teams provide support on a regional level



Selection Guide – digital version

The pdf file of this selection guide can be downloaded here:
http://www.nxp.com/discrete_selection_guide



Bipolar transistors, diodes, ESD protection, TVS, Filtering and Signal conditioning, Standard Logic/Picogate, Logic and MOSFETs product offerings

www.nxp.com

©2016 NXP Semiconductors N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: January 2016
Document order number: 9397 750 17631
Printed in the Netherlands

