

## Introduction – Electronic Circuit Protection ESX10-T

Electronic circuit protection type ESX10-T is designed to ensure selective disconnection of 24VDC load systems.

24VDC power supplies, which are widely used in industry today, will shut down the output in the event of an overload with the result that one faulty load in the system can lead to complete disconnection of all loads.

Through selective disconnection the ESX10-T responds much faster to overload or short circuit conditions than the switch-mode power supply. This is achieved by active current limitation. The ESX10-T limits the highest possible current to 1.3 to 1.8 times the selected rated current of the circuit protector. Thus it is possible to switch on capacitive loads of up to 20,000  $\mu$ F, but they are disconnected only in the event of an overload or short circuit.

For optimal alignment with the characteristics of the application the current rating of the ESX10-T can be selected in fixed values from 0.5 A...12 A. Failure and status indication are provided by a multicolour LED and an integral short-circuit-proof status output or a relay signal contact. Remote operation is possible by means of a remote reset signal or a remote ON/OFF control signal. The manual ON/OFF button allows separate actuation and reset of individual load circuits.

**Upon detection of overload or short circuit in the load circuit, the MOSFET of the load output will be blocked to interrupt the current flow. The load circuit can be re-activated via the remote electronic reset input, control input or manually by means of the ON/OFF button.**

### Features

- Selective load protection, electronic trip characteristics
- Active current limitation for safe connection of capacitive loads up to 20,000  $\mu$ F and on overload/short circuit
- Current ratings 0.5 A...12 A
- Reliable overload disconnection with  $1.1 \times I_n$  plus, even with long load lines or small cable cross sections (see table 3)
- Manual ON/OFF button (S1)
- Control input IN+ for remote ON/OFF signal (option)
- Electronic **reset** input RE (option)



## Approvals

Authority	Voltage rating	Current ratings
UL2367 (E306740)	24VDC	0.5...12 A
UL1604 (E322549)	24VDC	0.5...12 A
(class 1, div. 2, group A, B, C, D)		
UL508/ cUL 508	24VDC	0.5...12 A
CSA file 165971:		
CSA C22.2 No: 213 (class I, div. 2)	24VDC	0.5...12 A
Groups A, B, C, D, T5		
CSA C22.2 No: 142	24VDC	0.5...12 A
Class 2		
Meets requirements for Class 2 current limitation		
(ESX10-T... 0.5 A / 1 A / 2 A / 3 A		

## Technical data

(T<sub>ambient</sub> = 40°C, operating voltage U<sub>b</sub> = 24VDC)

### Operating data

Operating voltage U <sub>b</sub>	24VDC (18...32 V)
Current rating I <sub>n</sub>	fixed current ratings: 0.5, 1 A, 2 A, 3 A, 4 A, 6 A, 8 A, 10 A, 12 A
Closed current I <sub>o</sub>	ON condition: typically 20...30 mA depending on signal output
Status indication by means of	<ul style="list-style-type: none"> <li>• multicolour LED:           <ul style="list-style-type: none"> <li>GREEN: unit is ON, power-MOSFET is switched on</li> <li>- status output SF ON, supplies +24VDC</li> <li>ORANGE: in the event of overload or short circuit until electronic disconnection</li> <li>RED: - unit electronically disconnected</li> <li>- load circuit/Power-MOSFET OFF</li> <li>OFF: - manually switched off (S1 = OFF)</li> <li>or device is dead</li> <li>- undervoltage (U<sub>b</sub> &lt; 8 V)</li> <li>- after switch-on till the end of the delay period</li> </ul> </li> <li>• status output SF (option)</li> <li>• potential-free signal contact F (option)</li> <li>• ON/OFF/ condition of switch S1</li> </ul>

### Load circuit

Load output	Power-MOSFET switching output (high side switch)
Overload disconnection	typically 1.1 x I <sub>n</sub> (1.05...1.35 x I <sub>n</sub> )
Short-circuit current I <sub>K</sub>	active current limitation (see table 1)
Trip time for electronic disconnection	see time/current characteristics typically 3 s at I <sub>Load</sub> > 1.1 x I <sub>n</sub> typically 3 s...100 ms at I <sub>Load</sub> > 1.8 x I <sub>n</sub> (or 1.5 x I <sub>n</sub> /1.3 x I <sub>n</sub> )
Temperature disconnection	internal temperature monitoring with electronic disconnection
Low voltage monitoring	
load output	with hysteresis, no reset required load "OFF" at U <sub>b</sub> < 8 V
Starting delay t <sub>start</sub>	typically 0.5 sec after every switch-on and after applying U <sub>b</sub>
Disconnection of load circuit	electronic disconnection
Free-wheeling circuit	external free-wheeling diode recommended with inductive load
Several load outputs must not be connected in parallel	

## Technical data

(T<sub>ambient</sub> = 40°C, operating voltage U<sub>b</sub> = 24VDC)

Status output SF	<b>ESX10-TB-114/-124/</b> Electrical data plus-switching signal output, connects U <sub>b</sub> to terminal 12 of module 17plus nominal data: 24VDC / max. 0.2 A (short circuit proof) status output is internally connected to GND with a 10 kOhm resistor
Status OUT	ESX10-TB-114/-124 (signal status OUT), at U <sub>b</sub> = +24 V +24 V = S1 is ON, load output connected through 0 V = S1 is ON, load output blocked and/or switch S1 is OFF red LED lit
OFF condition	0 V level at status output when: <ul style="list-style-type: none"><li>• switch S1 is in ON position, but device is still in switch-on delay</li><li>• switch S1 is OFF, or control signal OFF, device is switched off</li><li>• no operating voltage U<sub>b</sub></li></ul>
Signal output F	<b>ESX10-TB-101/-102</b> Electrical data potential-free signal contact max. 30VDC/0.5 A, min. 10 V/10 mA
ON condition LED green	voltage U <sub>b</sub> applied, switch S1 is in ON position no overload, no short circuit
OFF condition LED off	• device switched off (switch S1 is in OFF position) • no voltage U <sub>b</sub> applied
Fault condition LED orange	overload condition > 1.1 x I <sub>n</sub> up to electronic disconnection
Fault condition LED red	electronic disconnection upon overload or short circuit device switched off with control signal (switch S1 is in ON position)
ESX10-TB-101	single signal, make contact contact SC/SO-SI open
ESX10-TB-102	single signal, break contact contact SC/SO-SI closed
Fault	signal output fault conditions: <ul style="list-style-type: none"><li>• no operating voltage U<sub>b</sub></li><li>• ON/OFF switch S1 is in OFF position</li><li>• red LED lighted (electronic disconnection)</li></ul>
Reset input RE	<b>ESX10-TB-124</b> Electrical data voltage: max. +32VDC high > 8VDC ≤ 32VDC low ≤ 3VDC > 0 V power consumption typically 2.6 mA (+24VDC) min. pulse duration typically 10 ms
Reset signal RE (terminal 22)	The electronically blocked ESX10-TB-124 may remotely be reset via an external momentary switch due to the falling edge of a +24 V pulse. A common reset signal can be applied to several devices simultaneously. Switched on devices remain unaffected.
Control input IN+	<b>ESX10-TB-114</b> Electrical data see reset input RE +24V level (HIGH): device will be switched on by a remote ON/OFF signal 0 V level (LOW): device will be switched off by a remote ON/OFF signal
Switch S1 ON/OFF	unit can only be switched on with S1 if a HIGH level is applied to IN+

# Electronic Circuit Protection ESX10-T

**Technical data** ( $T_{\text{ambient}} = 40^{\circ}\text{C}$ , operating voltage  $U_{\text{b}} = 24\text{VDC}$ )

General data			
Fail-safe element:	backup fuse for ESX10-T not required because of the integral redundant fail-safe element		
Terminals		LINE+ / LOAD+ / 0V	M4
screw terminals			
max. cable cross section			
flexible with wire end ferrule w/o plastic sleeve	20-6 AWG (0.5 - 10 mm <sup>2</sup> )		
multi-lead connection (2 identical cables)			
rigid/flexible	20-11 AWG (0.5 - 4 mm <sup>2</sup> )		
flexible with wire end ferrule without plastic sleeve	20-13 AWG (0.5 - 2.5 mm <sup>2</sup> )		
flexible with TW/N wire end ferrule with plastic sleeve	20-9 AWG (0.5 - 6 mm <sup>2</sup> )		
wire stripping length	10 mm		
tightening torque (EN 60934)	1.2 Nm		
Terminals		aux. contacts	
screw terminals			M3
max. cable cross section			
flexible with wire end ferrule w/o plastic sleeve	23-13 AWG (0.25 – 2.5 mm <sup>2</sup> )		
wire stripping length	8 mm		
tightening torque (EN 60934)	0.5 Nm		
Housing material	moulded		
Mounting		symmetrical rail to EN 50022-35x7.5	
Ambient temperature		0...+50 °C (without condensation, see EN 60204-1)	
Storage temperature		-20...+70 °C	
Humidity		96 hrs/95 % RH/40 °C to IEC 60068-2-78-Cab climate class 3K3 to EN 60721	
Vibration		3 g, test to IEC 68-2-6 test Fc	
Degree of protection		housing: IP20 DIN 40050 terminals: IP20 DIN 40050	
EMC		emission: EN 61000-6-3 susceptibility: EN 61000-6-2	
Insulation co-ordination (IEC 60934)		0.5 KV/2 pollution degree 2 re-inforced insulation in operating area	
dielectric strength		max. 32VDC (load circuit)	
Insulation resistance (OFF condition)		n/a, only electronic disconnection	
Approvals		UL2367, File E306740, Solid State Overcurrent Protectors UL1604 (class I, div. 2, zone 2), UL508, CE logo CSA C22.2 No. 142 - file 165971, C22.2 No. 213 - file 165971, C1D2 Groups A, B, C, D, Temp Code T5; Ambient 0°-40°C	
Dimensions (W x H x D)		12.5 x 80 x 83 mm	
Mass		approx. 65 g	

**Table 1:**  
**voltage drop, current limitation, max. load current**

current rating In	typically voltage drop U <sub>on</sub> at In	active current limitation (typically)	max. load current at 100% ON duty T <sub>u</sub> = 40 °C	max. load current at 100% ON duty T <sub>u</sub> = 50 °C
0.5 A	70 mV	1.8 x In	0.5 A	0.5 A
1 A	80 mV	1.8 x In	1 A	1 A
2 A	130 mV	1.8 x In	2 A	2 A
3 A	80 mV	1.8 x In	3 A	3 A
4 A	100 mV	1.8 x In	4 A	4 A
6 A	130 mV	1.8 x In	6 A	5 A
8 A	120 mV	1.5 x In	8 A	7 A
10 A	150 mV	1.5 x In	10 A	9 A
12 A	180 mV	1.3 x In	12 A	10.8 A

Attention: when mounted side-by-side without convection the ESX10-T should not carry more than 80% of its rated load with 100% ON duty due to thermal effects.

**Table 2: ESX10-T - Ordering Information**

Version	Signal input				Signal output			
	Signal contact		Status output					
	without Signal Input	Control input ON/OFF Reset	Remote Reset	without Signal Output	single signal N/O (normally open NO)	single signal N/C (normally closed NC)	without Signal Output	Status OUT Positive 24V = OK
ESX10-TA-100	x			x			x	
ESX10-TB-101	x				x		x	
ESX10-TB-102	x					x	x	
ESX10-TB-114		x					x	
ESX10-TB-124			x	x			x	
ESX10-TB-127			x	x				x

ESX10-TA-100		ESX10-TB-101		ESX10-TB-102		ESX10-TB-114*		ESX10-TB-124**		ESX10-TB-127	
Current Rating (amps)	Circuit Protection Part Number	Current Rating (amps)	N/O Contact Part Number	Current Rating (amps)	N/C Contact Part Number	Current Rating (amps)	Control Input Part Number	Current Rating (amps)	Reset Input Part Number	Current Rating (amps)	Reset Input Part Number
0.5	6720005305	0.5	6720005320	0.5	6720005340	0.5	6720005360	0.5	6720005380	0.5	6720005309
1	6720005301	1	6720005321	1	6720005341	1	6720005361	1	6720005381	1	6720005319
2	6720005302	2	6720005322	2	6720005342	2	6720005362	2	6720005382	2	6720005329
3	6720005303	3	6720005323	3	6720005343	3	6720005363	3	6720005383	3	6720005339
4	6720005304	4	6720005324	4	6720005344	4	6720005364	4	6720005384	4	6720005349
6	6720005306	6	6720005326	6	6720005346	6	6720005366	6	6720005386	6	6720005369
8	6720005308	8	6720005328	8	6720005348	8	6720005368	8	6720005388	8	6720005389
10	6720005310	10	6720005330	10	6720005350	10	6720005370	10	6720005390	10	6720005399
12	6720005312	12	6720005332	12	6720005352	12	6720005372	12	6720005392	12	6720005313


\* Control force input on/off    \*\* Reset input only to reset under fault conditions

Please note:


- The user should ensure that the cable cross sections of the relevant load circuit are suitable for the current rating of the ESX10-T used.
- Automatic start-up of machinery after shut down must be prevented (Machinery Directive 98/37/EG and EN 60204-1). In the event of a short circuit or overload the load circuit will be disconnected electronically by the ESX10-T.
- Refer to UL/CSA file for proper wiring and installation techniques.

## ESX10-T Signal inputs / outputs (wiring diagram)


**ESX10-TA-100**  
without signal input/output

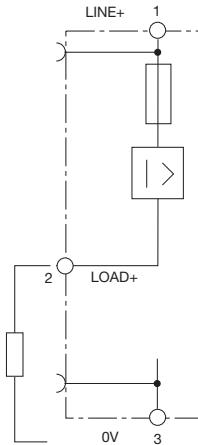


**ESX10-TB-101**  
without signal input  
with signal output F  
(single signal, N/O)

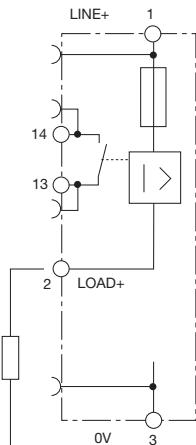

**ESX10-TB-102**  
without signal input  
with signal output F  
(single signal, N/C)

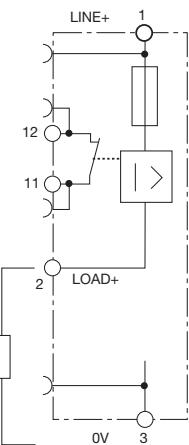

**ESX10-TB-114**  
with control input IN+  
(+24VDC)  
with status output SF  
(+24 V = load output ON)

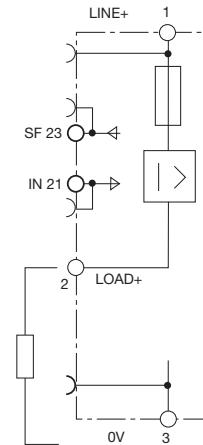


operating condition: 13-14 closed  
fault condition: 13-14 open


operating condition: 11-12 open  
fault condition: 11-12 closed

operating condition: SF +24 V = OK  
fault condition: SF 0 V

**ESX10-TB-124**  
with reset input RE  
(+24VDC ↓)  
with status output SF  
(+24 V = load output ON)

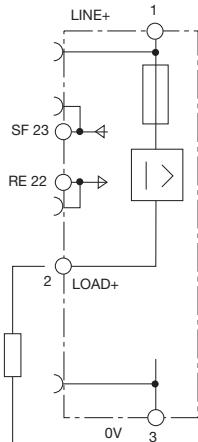


**ESX10-TB-127**  
with reset input RE  
(+DC 24 V ↓)  
with inverse status output SF  
(0 V = load output ON)

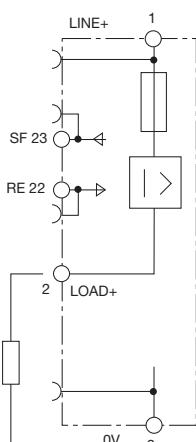

operating condition: SF +24 V = O  
fault condition: SF 0 V

operating condition: SF 0 V = OK  
fault condition: SF +24 V


## Dimensions

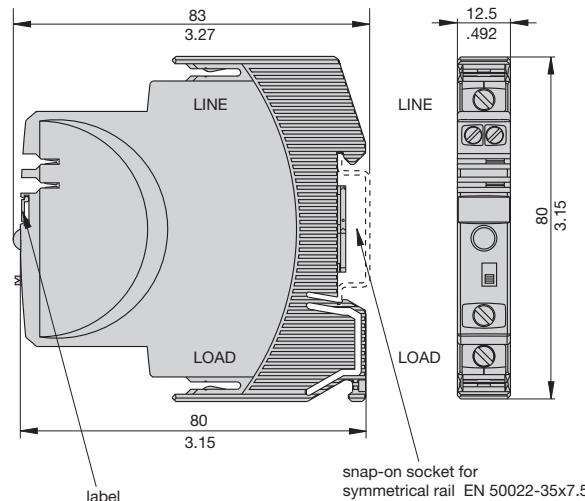

This is a metric design and millimeter dimensions take precedence (  $\frac{\text{mm}}{\text{inch}}$  )

# Electronic Circuit Protection ESX10-T

## Time/Current characteristic curve ( $T_a = 25^\circ\text{C}$ )

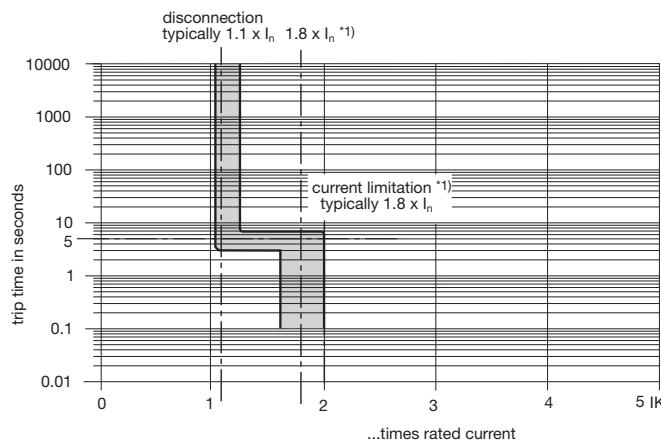

<sup>\*)</sup> current limitation typically  $1.8 \times I_n$  times rated current at  $I_n = 0.5 \text{ A} \dots 6 \text{ A}$   
 current limitation typically  $1.5 \times I_n$  times rated current at  $I_n = 8 \text{ A} \text{ or } 10 \text{ A}$   
 current limitation typically  $1.3 \times I_n$  times rated current at  $I_n = 12 \text{ A}$




- The trip time is typically 3 s in the range between 1.1 and  $1.8 \times I_n$ .
- Electronic current limitation occurs at typically  $1.8 \times I_n$  which means that under all overload conditions (independent of the power supply and the resistance of the load circuit) the max. overload before disconnection will not exceed  $1.8 \times I_n$  times the current rating. Trip time is between 100 ms and 3 sec (depending on overload or at short circuit).
- Without this current limitation a considerably higher overload current would flow in the event of an overload or short circuit.

**Table 3: Reliable trip of ESX10-T**

Reliable trip of ESX10-T with different cable lengths and cross sections										
Resistivity of copper $\rho_0 =$	0.0178 (Ohm x mm <sup>2</sup> ) / m									
<b>U<sub>b</sub> = DC 19.2 V (= 80 % of 24 V)</b>	voltage drop of ESX10-T and tolerance of trip point (typically $1.1 \times I_n = 1.05 \dots 1.35 \times I_n$ ) have been taken into account.									
ESX10-T-selected rating $I_n$ (in A)	→	3	6							
e. g. trip current $I_{ab} = 1.25 \times I_n$ (in A)	→	3.75	7.5	→	<b>ESX10-T trips after 3 s</b>					
R <sub>max</sub> in Ohm = $(U_b / I_{ab}) - 0.050$	→	5.07	2.51							
The ESX10-T reliably trips from 0 Ohm to max. circuitry resistance R <sub>max</sub>										
	Cable cross section <b>A</b> in mm <sup>2</sup>		0.14	0.25	0.34	0.5	0.75	1	1.5	
	cable length <b>L</b> in meter (= single length)	↓	cable resistance in Ohm = $(R_0 \times 2 \times L) / A$							
	5		1.27	0.71	0.52	0.36	0.24	0.18	0.12	
	10		2.54	1.42	1.05	0.71	0.47	0.36	0.24	
	15		3.81	2.14	1.57	1.07	0.71	0.53	0.36	
	20		5.09	2.85	2.09	1.42	0.95	0.71	0.47	
	25		6.36	3.56	2.62	1.78	1.19	0.89	0.59	
	30		7.63	4.27	3.14	2.14	1.42	1.07	0.71	
	35		8.90	4.98	3.66	2.49	1.66	1.25	0.83	
	40		10.17	5.70	4.19	2.85	1.90	1.42	0.95	
	45		11.44	6.41	4.71	3.20	2.14	1.60	1.07	
	50		12.71	7.12	5.24	3.56	2.37	1.78	1.19	
	75		19.07	10.68	7.85	5.34	3.56	2.67	1.78	
	100		25.34	14.24	10.47	7.12	4.75	3.56	2.37	
	125		31.79	17.80	13.09	8.90	5.93	4.45	2.97	
	150		38.14	21.36	15.71	10.68	7.12	5.34	3.56	
	175		44.50	24.92	18.32	12.46	8.31	6.23	4.15	
	200		50.86	28.48	20.94	14.24	9.49	7.12	4.75	
	225		57.21	32.04	23.56	16.02	10.68	8.01	5.34	
	250	→	63.57	35.60	26.18	17.80	11.87	8.90	5.93	
<b>Example 1:</b>	max. length at 1.5 mm <sup>2</sup> and 3 A	214 m	→							
<b>Example 2:</b>	max. length at 1.5 mm <sup>2</sup> and 6 A	106 m								
<b>Example 3:</b>	mixed wiring: (Control cabinet – sensor/actuator level)	R1 = 40 m in 1.5 mm <sup>2</sup> and R2 = 5 m in 0.25 mm <sup>2</sup> : R1 = 0.95 Ohm, R2 = 0.71 Ohm	Total (R1 + R2) = 1.66 Ohm							

## Mounting examples for ESX10-T

The ESX10-T features an integral power distribution system.

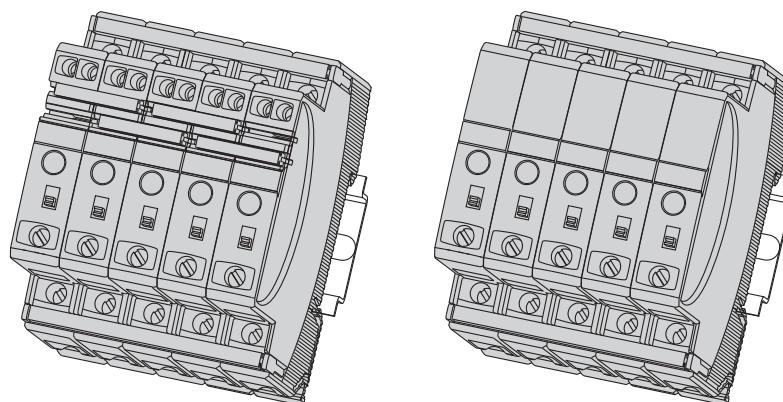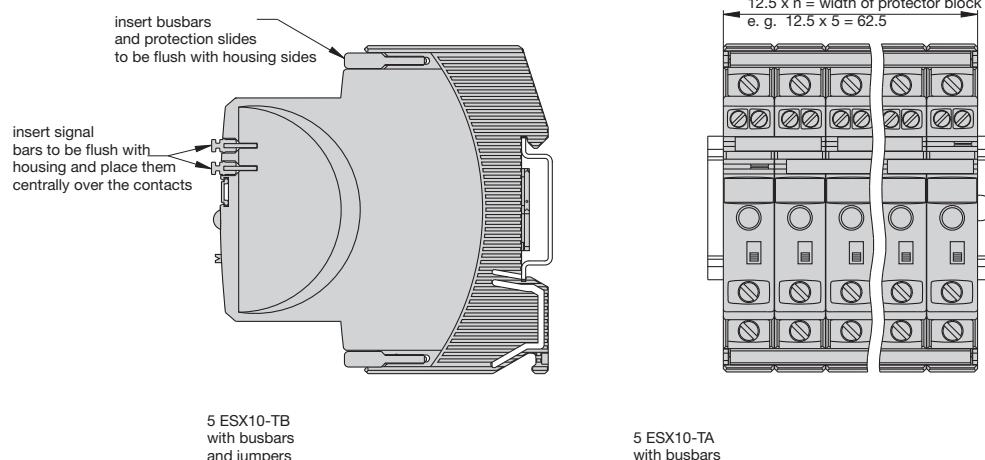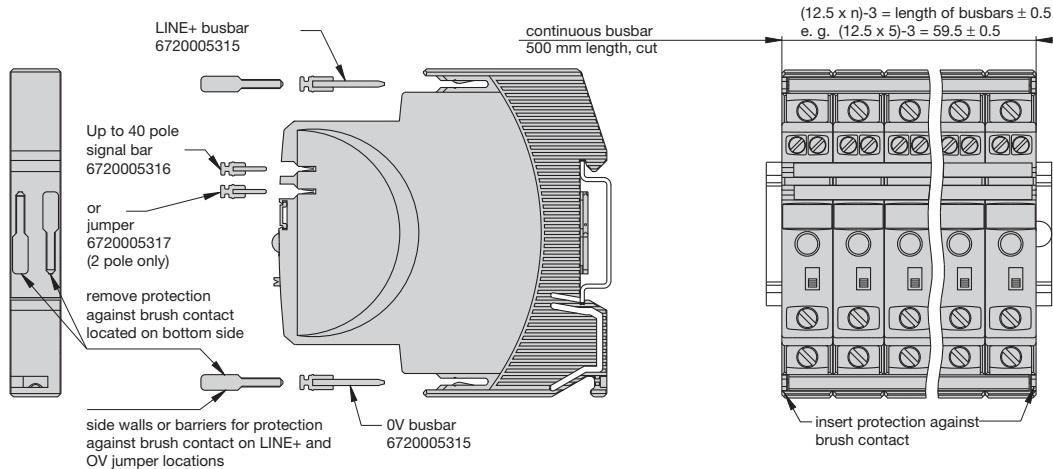

## Mounting procedure:


Before wiring insert busbars into protection block.

# Electronic Circuit Protection ESX10-T

## Connection diagrams and application examples ESX10-T


Signal contacts are shown in OFF or fault concition.

**ESX10-TA-100**

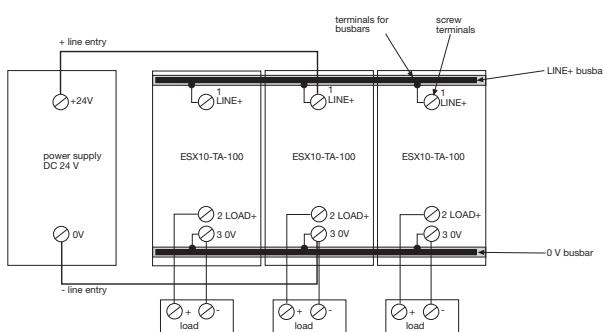


**ESX10-TB-101**

group signaling (series connection)

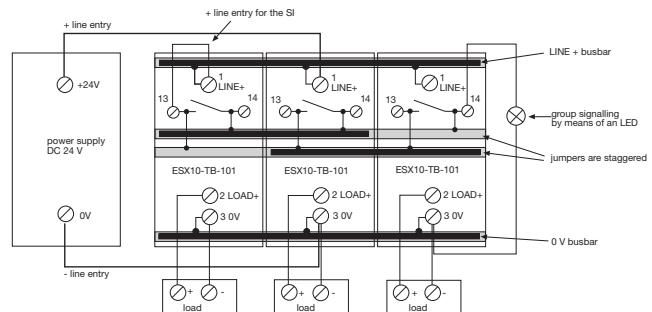


**ESX10-TB-102**

Single signaling with common line entry

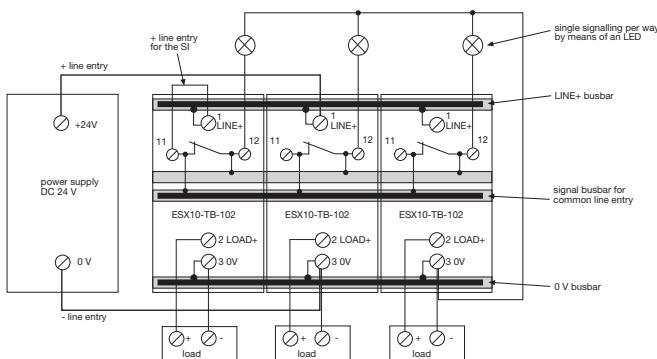

**ESX10-TB-124**

Single signaling with common reset

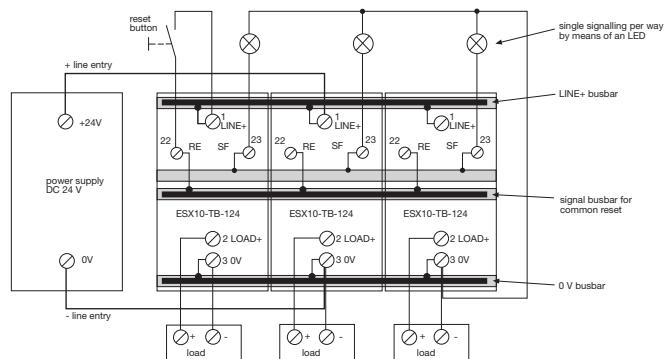

## Accessories for ESX10-T

### Description

The ESX10-T features an integral power distribution system. The following wiring modes are possible with various plugable current and signal busbars:

- LINE +(24VDC)
- 0 V

**Caution:** The electronic devices ESX10-T require a 0 V connection

- signal contacts
- reset inputs

Description	Part No.
<b>Busbars for LINE+ and 0 V</b>	<b>6720005315</b>
max. load with one line entry (recommended: centre line entry)	I <sub>max</sub> 50 A
max. load with two line entries	I <sub>max</sub> 63 A
length:	500 mm

<b>Signal busbars for signal contacts and reset inputs</b>	<b>6720005316</b>
max. load with one line entry	I <sub>max</sub> 1 A
with one series connection of signal contacts	I <sub>max</sub> 0.5 A
length:	500 mm

<b>Jumpers for signal contacts</b>	<b>6720005317</b>
length:	21 mm
packing unit:	10 pcs

<b>TS32 rail adapter</b>	<b>9102100000</b>
(Remove protection walls/barriers before using adapter.)	

For detailed installation instructions and approvals contact Weidmuller at 1-800-849-9343 or go to [www.weidmuller.com](http://www.weidmuller.com)

## Introduction – Circuit Protection

Weidmuller's DIN-rail mounted circuit breakers are available for use in applications where circuit protection must be able to distinguish between circuit overloads and short circuits. Each circuit breaker has the ability to be reset without the need to change components. All circuit breakers are available with an assortment of jumpers and marking tags.

Circuit breakers in the 9926 Series are cULus listed according to UL489 and CSA 22.2 No. 5.02, CE, VDE. The hydraulic magnetic trip mechanism offers 10,000A of interrupting capacity in 120V and 240V, 50/60Hz applications.



**9926 Series**

The CB4200 Series of thermal magnetic circuit breakers feature a push-button style of trip reset. This reset provides a visual indication of status which allows for rapid troubleshooting.



**CB4200 Series**

The CB2200 Series feature integrated alarm contacts within a narrow profile, thereby allowing increased enclosure capacity. All of these circuit breakers demonstrate consistent reliability through 100% calibration and testing, and feature a touch safe design to prevent injury from accidental contact with live components.



**CB2200 Series**

The CB9100 Series of thermal magnetic circuit breakers provide a rugged and industry-standard form factor (18 mm/pole). For supplemental circuit protection.



**CB9100 Series**

# 9926 Series Branch Rated Circuit Breakers-AC Version

## Circuit Breakers Hydraulic Magnetic Type

- Single pole and double pole versions
- 120/240 VAC, 50/60 Hz
- Up to 25A
- Just 13 mm wide
- Mounts on 35mm DIN-rail
- cULus listed according to UL489 CSA C22.2 No. 5.02, CE, VDE

## 9926 Series Single Pole



## 9926 Series Double Pole



### Ordering Data

Current Ratings (amps)	Part No.	Description
0.5	9926251000	QL-1-13-DM-KM-0.5
1	9926251001	QL-1-13-DM-KM-01
2	9926251002	QL-1-13-DM-KM-02
3	9926251003	QL-1-13-DM-KM-03
4	9926251004	QL-1-13-DM-KM-04
5	9926251005	QL-1-13-DM-KM-05
6	9926251006	QL-1-13-DM-KM-06
7	9926251007	QL-1-13-DM-KM-07
8	9926251008	QL-1-13-DM-KM-08
10	9926251010	QL-1-13-DM-KM-10
13	9926251013	QL-1-13-DM-KM-13
15	9926251015	QL-1-13-DM-KM-15
16	9926251016	QL-1-13-DM-KM-16
20	9926251020	QL-1-13-DM-KM-20
25	9926251025	QL-1-13-DM-KM-25

### Type: Single Pole (up to 120 VAC)

Current Ratings (amps)	Part No.	Description
0.5	TS 35	
1		
2		
3		
4		
5		
6		
7		
8		
10		
13		
15		
16		
20		
25		

### Type: Double Pole (up to 240 VAC)

Current Ratings (amps)	Part No.	Description
0.5	TS 35	
1		
2		
3		
4		
5		
6		
7		
8		
10		
13		
15		
16		
20		
25		

### Technical Data

Voltage	120/240 VAC, 50/60Hz
Current	
minimum	0.5A
maximum	25A
Interrupting capacity	10,000A
Dielectric strength	1500V, 50/60Hz
Insulation resistance	100MΩ
Operating life	10000 mechanical operations
Operating temperature	-40...+65°C
Wire size*	
0.5-15A:	14AWG min., 10AWG max.
20-25A:	10AWG min.
Torque	20 in.-lb

### Approval

cULus listed according to UL489 CSA C22.2 No. 5.02, CE, VDE

### Accessories

Part No.
Bus-bar (1 pole, insulated, 1 m)
67101904
Bus-bar (2 pole, insulated, 1 m)
67101972
Bus-bar end cap, 1 pole
67101973
Bus-bar end cap, 2 pole
67101974
Power lug, straight
67101960
Power lug, 90°
67101961
Lock-out handle
67101913

\*Wire sizes: gauges specified are the minimum allowable as per CSA and UL standards.

The 9926 circuit breakers do not have provisions for marking tags. A possible solution is to cut the adhesive SchS2 tag rail to length (approximately 20 mm on a single pole unit so the current rating remains visible or approximately 30 mm on a two pole unit). The SchS2 accepts DEK, WS and ESG 8/17 marking tags. The part number for adhesive SchS2 is 1720600000.

### Trip Curves—Hydraulic Magnetic Type Typical time/current characteristics at 30°C


#### Sample trip characteristics - KM

	125%	150%	200%	400%	600%	800%	1000%
minimum (sec)	15	8	4	0.7	0.09	0.007	0.005
maximum (sec)	300	90	28	4	1.5	0.6	0.4


Although the 9926 series uses a magnetic only trip mechanism, CSA testing indicates a trip characteristic similar to thermal magnetic trip mechanisms. No de-rating is required at elevated temperatures.

Additional trip curves and amp ratings are available upon request.


### 9926 Series AC Version - dimensions in mm (in.)

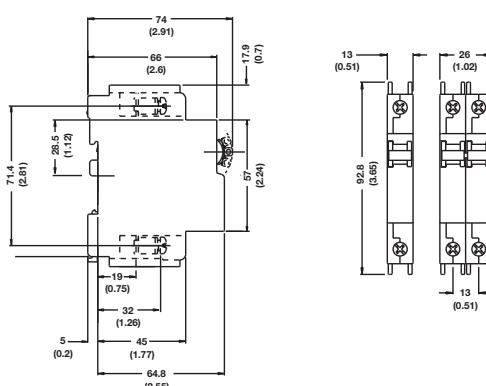

### 9926 Series—AC version Trip Curve

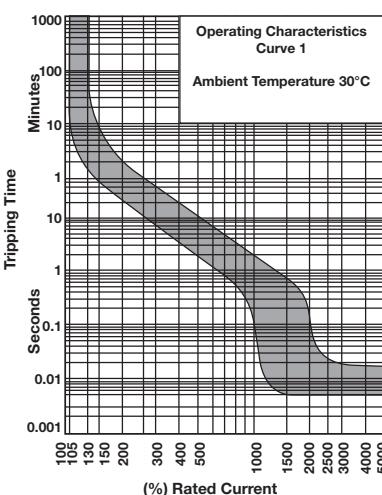

### 9926 Series—AC version Trip Curve

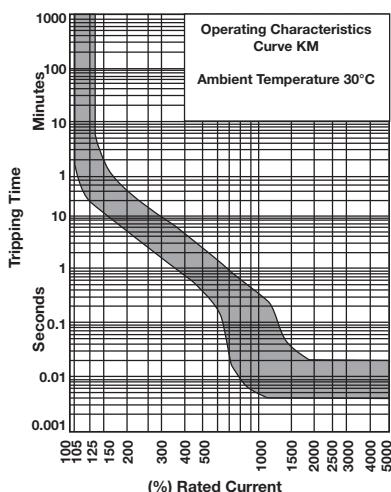

Trip Curve 1 applies to the following part numbers where "XX" is the current rating:  
Single Pole—99262512XX      Double Pole—99262522XX

## 9926 Series Branch Rated Circuit Breakers-AC Version with Contacts

**Circuit Breakers with Auxiliary switch, Trip alarm, Combination of both**

- AC voltages (120/240V)
- Single and double pole versions
- cULus listed according to UL489 and C22.2 No. 5.02, CE, VDE
- Factory fitted auxiliary or trip alarm
- Compact 6.5mm width
- Attached to right hand side of circuit breaker

### Technical Data

Voltage	120/240 VAC, 50/60Hz
Current	
minimum	0.5A
maximum	25A
Interrupting capacity	10,000A
Dielectric strength	1500V, 50/60Hz
Insulation resistance	100MΩ
Operating life	10000 mechanical operations
Operating temperature	-40...+65°C
Wire size*	
0.5-15A:	14AWG min., 10AWG max.
20-25A:	10AWG min.
Torque	20 in.-lb

### Approval

cULus listed according to UL489 and C22.2 No. 5.02, CE, VDE

†UL 489 listed  
(5A, 250 VAC; 0.5A, 80 VDC Auxiliary; 0.5A, 125 VDC Trip Alarm)

IEC 60947-5-1 Approved  
(5A, 250 VAC; 0.5A, 110 VDC Auxiliary; 0.5A, 125 VDC Trip Alarm)

\*Wire sizes: gauges specified are the minimum allowable as per CSA and UL standards.

The 9926 circuit breakers do not have provisions for marking tags. A possible solution is to cut the adhesive SchS2 tag rail to length (approximately 20 mm on a single pole unit so the current rating remains visible or approximately 30 mm on a two pole unit). The SchS2 accepts DEK, WS and ESG 8/17 marking tags. The part number for adhesive SchS2 is 1720600000.

**9926 Series  
Single Pole  
w/ Auxiliary Contact<sup>†</sup>**



**9926 Series  
Single Pole Trip  
(Alarm Contact)**



**9926 Series  
Single Pole Combination  
(Auxiliary & Alarm Contact)<sup>†</sup>**



### Type: Single Pole Aux (up to 120 VAC)

Current Ratings (amps)	Part No.	Description
1	9926261001	QL-A-1-13-DM-KM-1
2	9926261002	QL-A-1-13-DM-KM-2
5	9926261005	QL-A-1-13-DM-KM-5
10	9926261010	QL-A-1-13-DM-KM-10
15	9926261015	QL-A-1-13-DM-KM-15
20	9926261020	QL-A-1-13-DM-KM-20
25	9926261025	QL-A-1-13-DM-KM-25

### Type: Single Pole Trip (up to 120 VAC)

Current Ratings (amps)	Part No.	Description
1	9926271001	QL-T-1-13-DM-KM-1
2	9926271002	QL-T-1-13-DM-KM-2
5	9926271005	QL-T-1-13-DM-KM-5
10	9926271010	QL-T-1-13-DM-KM-10
15	9926271015	QL-T-1-13-DM-KM-15
20	9926271020	QL-T-1-13-DM-KM-20
25	9926271025	QL-T-1-13-DM-KM-25

### Type: Single Pole Combo (up to 120 VAC)

Current Ratings (amps)	Part No.	Description
1	9926281001	QL-AT-1-13-DM-KM-1
2	9926281002	QL-AT-1-13-DM-KM-2
5	9926281005	QL-AT-1-13-DM-KM-5
10	9926281010	QL-AT-1-13-DM-KM-10
15	9926281015	QL-AT-1-13-DM-KM-15
20	9926281020	QL-AT-1-13-DM-KM-20
25	9926281025	QL-AT-1-13-DM-KM-25

**9926 Series  
Double Pole  
w/ Auxiliary Contact<sup>†</sup>**



**9926 Series  
Double Pole Trip  
(Alarm Contact)**



**9926 Series  
Double Pole Combination  
(Auxiliary & Alarm Contact)<sup>†</sup>**



### Type: Double Pole Aux (up to 240 VAC)

Current Ratings (amps)	Part No.	Description
1	9926262001	QL-A-2-13-DM-KM-1
2	9926262002	QL-A-2-13-DM-KM-2
5	9926262005	QL-A-2-13-DM-KM-5
10	9926262010	QL-A-2-13-DM-KM-10
15	9926262015	QL-A-2-13-DM-KM-15
20	9926262020	QL-A-2-13-DM-KM-20
25	9926262025	QL-A-2-13-DM-KM-25

### Type: Double Pole Trip (up to 240 VAC)

Current Ratings (amps)	Part No.	Description
1	9926272001	QL-T-2-13-DM-KM-1
2	9926272002	QL-T-2-13-DM-KM-2
5	9926272005	QL-T-2-13-DM-KM-5
10	9926272010	QL-T-2-13-DM-KM-10
15	9926272015	QL-T-2-13-DM-KM-15
20	9926272020	QL-T-2-13-DM-KM-20
25	9926272025	QL-T-2-13-DM-KM-25


### Type: Double Pole Combo (up to 240 VAC)

Current Ratings (amps)	Part No.	Description
1	9926282001	QL-AT-2-13-DM-KM-1
2	9926282002	QL-AT-2-13-DM-KM-2
5	9926282005	QL-AT-2-13-DM-KM-5
10	9926282010	QL-AT-2-13-DM-KM-10
15	9926282015	QL-AT-2-13-DM-KM-15
20	9926282020	QL-AT-2-13-DM-KM-20
25	9926282025	QL-AT-2-13-DM-KM-25


### 9926 Series-AC version Trip Curve

**Trip Curves—Hydraulic Magnetic Type Typical time/current characteristics at 30°C**

Additional trip curves and amp ratings are available upon request.

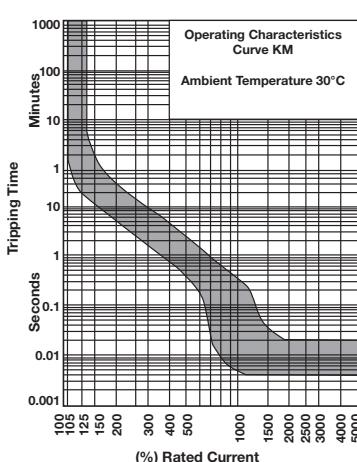

### Dual Mount Dimensions in mm (in.)

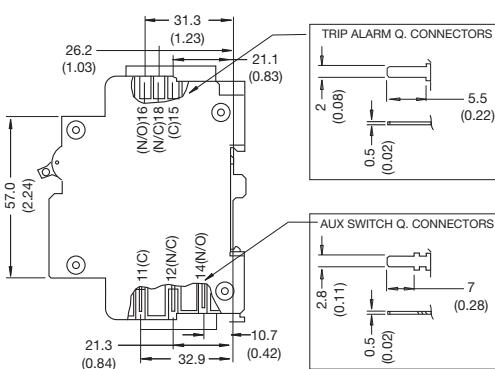

## 9926 Series Branch Rated Circuit Breakers-DC Version

### Circuit Breakers Hydraulic Magnetic Type

- Single pole versions only
- U2 trip curve for general purpose applications
- 80 and 125 VDC
- Up to 60A
- Just 13 mm wide
- Mounts on 35mm DIN-rail
- UL 489A listed
- VDE

### 9926 Series Single Pole (80 VDC)



### 9926 Series Single Pole (125 VDC)



#### Ordering Data

Type: Single Pole (80 VDC)		
Current Ratings (amps)	Part No.	Description
0.5	9926251900	QY-1-13-DM-U2-0.5
1	9926251901	QY-1-13-DM-U2-01
2	9926251902	QY-1-13-DM-U2-02
3	9926251903	QY-1-13-DM-U2-03
4	9926251904	QY-1-13-DM-U2-04
5	9926251905	QY-1-13-DM-U2-05
10	9926251910	QY-1-13-DM-U2-10
15	9926251915	QY-1-13-DM-U2-15
20	9926251920	QY-1-13-DM-U2-20
25	9926251925	QY-1-13-DM-U2-25
30	9926251930	QY-1-13-DM-U2-30
35	9926251935	QY-1-13-DM-U2-35
40	9926251940	QY-1-13-DM-U2-40
45	9926251945	QY-1-13-DM-U2-45
50	9926251950	QY-1-13-DM-U2-50
60	9926251960	QY-1-13-DM-U2-60

#### Type: Single Pole (125 VDC)

Type: Single Pole (125 VDC)		
Current Ratings (amps)	Part No.	Description
1	9926251801	QY-1-13-DM-U2-01-B1
2	9926251802	QY-1-13-DM-U2-02-B1
3	9926251803	QY-1-13-DM-U2-03-B1
4	9926251804	QY-1-13-DM-U2-04-B1
5	9926251805	QY-1-13-DM-U2-05-B1
10	9926251810	QY-1-13-DM-U2-10-B1
15	9926251815	QY-1-13-DM-U2-15-B1
20	9926251820	QY-1-13-DM-U2-20-B1
25	9926251825	QY-1-13-DM-U2-25-B1
30	9926251830	QY-1-13-DM-U2-30-B1
35	9926251835	QY-1-13-DM-U2-35-B1
40	9926251840	QY-1-13-DM-U2-40-B1
45	9926251845	QY-1-13-DM-U2-45-B1
50	9926251850	QY-1-13-DM-U2-50-B1
60	9926251860	QY-1-13-DM-U2-60-B1

#### Accessories


Type	Part No.
Bus-bar (1 pole, insulated 1m)	67101904
Bus bar end cap, 1 pole	67101973
Power lug, straight	67101960
Power lug, 90°	67101961
Lock-out handle	67101913

Technical Data	
Voltage	80,125 VDC
Current	
minimum	0.5 A
maximum	60 A
Interrupting capacity	10,000 A
Dielectric strength	1500 V, 50/60 Hz
Insulation resistance	100 MΩ
Operating life	10000 mechanical operations
Operating temperature	-40...+65°C
Wire size*	
1-15A:	14 AWG min., 10 AWG max.
20-25A:	10 AWG min.
Torque	20 in.-lb
Approval	
UL 489A Listed, CE, VDE	


\*Wire sizes: gauges specified are the minimum allowable as per CSA and UL standards.

The 9926 circuit breakers do not have provisions for marking tags. A possible solution is to cut the adhesive SchS2 tag rail to length (approximately 20 mm on a single pole unit so the current rating remains visible or approximately 30 mm on a two pole unit). The SchS2 accepts DEK, WS and ESG 8/17 marking tags. The part number for adhesive SchS2 is 1720600000.

#### 9926 Series-DC version Trip Curve

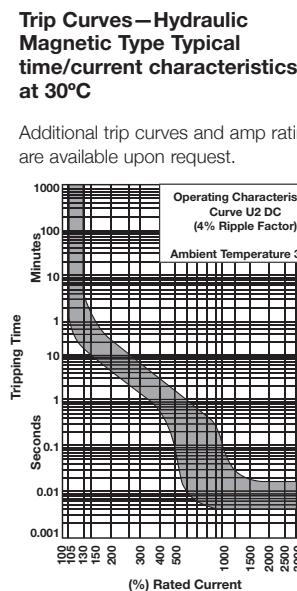

#### Dimensions in mm (in.)

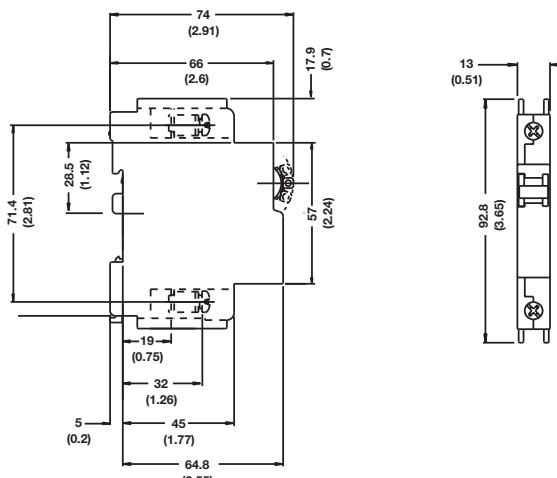

# 9926 Series Supplemental Circuit Breakers

## Circuit Breakers Hydraulic Magnetic Type

- AC Voltages 277/480V
- Trip curve 2 for general purpose applications
- UL 1077 recognized
- VDE approved and CE marked
- Just 13 mm wide
- Mounts to 35 mm DIN-rail
- Factory fitted auxiliary or trip alarm
- Single, double and triple pole versions

## 9926 Series Single Pole



## 9926 Series Double Pole



## 9926 Series Triple Pole



### Ordering Data

Current Ratings (amps)	Part No.	Description
1	9926251501	QZ-1-13-D-2-01
2	9926251502	QZ-1-13-D-2-02
3	9926251503	QZ-1-13-D-2-03
4	9926251504	QZ-1-13-D-2-04
5	9926251505	QZ-1-13-D-2-05
6	9926251506	QZ-1-13-D-2-06
8	9926251508	QZ-1-13-D-2-08
10	9926251510	QZ-1-13-D-2-10
15	9926251515	QZ-1-13-D-2-15
20	9926251520	QZ-1-13-D-2-20
25	9926251525	QZ-1-13-D-2-25
35	9926251535	QZ-1-13-D-2-35
40	9926251540	QZ-1-13-D-2-40
50	9926251550	QZ-1-13-D-2-50
60	9926251560	QZ-1-13-D-2-60

### Type: Single Pole (up to 277 VAC)

Current Rating (amps)	Part No.	Description
1	9926252501	QZ-2-13-D-2-01
2	9926252502	QZ-2-13-D-2-02
4	9926252504	QZ-2-13-D-2-04
5	9926252505	QZ-2-13-D-2-05
6	9926252506	QZ-2-13-D-2-06
10	9926252510	QZ-2-13-D-2-10
15	9926252515	QZ-2-13-D-2-15
20	9926252520	QZ-2-13-D-2-20
25	9926252525	QZ-2-13-D-2-25
30	9926252530	QZ-2-13-D-2-30
35	9926252535	QZ-2-13-D-2-35
40	9926252540	QZ-2-13-D-2-40
50	9926252550	QZ-2-13-D-2-50
60	9926252560	QZ-2-13-D-2-60

### Type: Double Pole (up to 480 VAC)

Current Rating (amps)	Part No.	Description
10	9926253510	QZ-3-13-D-2-10
15	9926253515	QZ-3-13-D-2-15
20	9926253520	QZ-3-13-D-2-20
25	9926253525	QZ-3-13-D-2-25
30	9926253530	QZ-3-13-D-2-30
40	9926253540	QZ-3-13-D-2-40
50	9926253550	QZ-3-13-D-2-50
60	9926253560	QZ-3-13-D-2-60


### Type: Triple Pole (up to 480 VAC)

Current Rating (amps)	Part No.	Description
10	9926253510	QZ-3-13-D-2-10
15	9926253515	QZ-3-13-D-2-15
20	9926253520	QZ-3-13-D-2-20
25	9926253525	QZ-3-13-D-2-25
30	9926253530	QZ-3-13-D-2-30
40	9926253540	QZ-3-13-D-2-40
50	9926253550	QZ-3-13-D-2-50
60	9926253560	QZ-3-13-D-2-60

### Accessories

Type	Part No.
Bus bar (1 pole, insulated 1m)	67101904
Bus bar (2 pole, insulated 1m)	67101972
Bus bar (3 pole, insulated 1m)	67101971
Bus bar end cap, 1 pole	67101973
Bus bar end cap, 2 pole or 3 pole	67101974
Power lug, straight	67101960
Power lug, 90°	67101961
Lock-out handle	67101913

### 9926 Series Supplemental – dimensions in mm (in.)

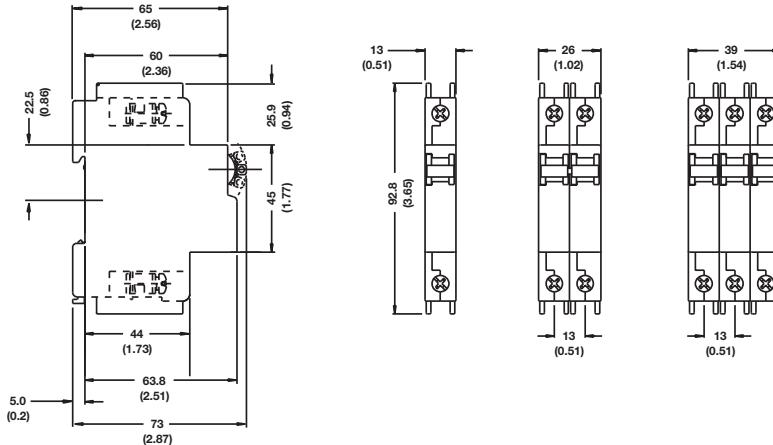

### Technical Data

Voltage	277/480 VAC @ 50/60 Hz
Current minimum	0.5 A
maximum	60 A
Interrupting capacity	5 kA @ 277/480 V, 5 kA @ 120 V, 5 kA @ 240 V
Dielectric strength	1500 V, 50/60 Hz
Insulation resistance	100 MΩ
Operating life	10000 mechanical operations
Operating temperature	-40...+65°C
Wire size*	
1-15A:	14 AWG min., 10 AWG max.
20-25A:	10 AWG min.
Torque	20 in.-lb

### Approval

†UL 1077 Recognized, VDE (EN 60947-2) Approved, CSA C22.2 No. 235, CE Marked

\*Wire sizes: gauges specified are the minimum allowable as per CSA and UL standards.


The 9926 circuit breakers do not have provisions for marking tags. A possible solution is to cut the adhesive SchS2 tag rail to length (approximately 20 mm on a single pole unit so the current rating remains visible or approximately 30 mm on a two pole unit). The SchS2 accepts DEK, WS and ESG 8/17 marking tags. The part number for adhesive SchS2 is **1720600000**.

‡cURus recognized to UL1077 and C22.2 No. 235

### 9926 Series-Supplemental Trip Curve

#### Trip Curves—Hydraulic Magnetic Type Typical time/current characteristics at 30°C

Additional trip curves and amp ratings are available upon request.

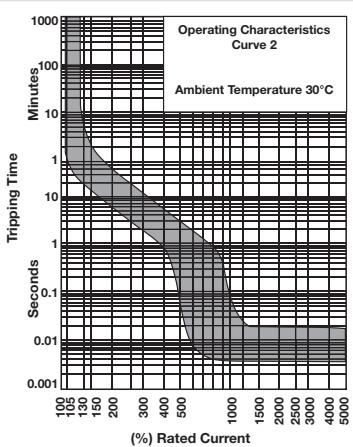

## 9926 Series Supplemental Circuit Breakers with Contacts

### Circuit Breakers

Auxiliary switch, Trip alarm, Combination of both

- AC Voltages 277/480V
- Trip curve 2 for general purpose applications
- UL 1077 recognized
- VDE approved and CE marked
- Just 13 mm wide
- Mounts to 35 mm DIN-rail
- Factory fitted auxiliary or trip alarm
- Single, double and triple pole versions

#### Technical Data

Voltage	277/480 VAC @ 50/60 Hz
Current	
minimum	0.5 A
maximum	60 A
Interrupting capacity	5 kA @ 277/480 V, 5 kA @ 120 V, 5 kA @ 240 V
Dielectric strength	1500 V, 50/60 Hz
Insulation resistance	100 MΩ
Operating life	10000 mechanical operations
Operating temperature	-40...+65°C
Wire size*	
1-15A:	14 AWG min., 10 AWG max.
20-25A:	10 AWG min.
Torque	20 in.-lb

#### Approval

†UL 1077 Recognized, VDE (EN 60947-2)  
Approved, CSA C22.2 No. 235, CE Marked


‡UL 489 listed  
(5A, 250 VAC; 0.5A, 80 VDC Auxiliary; 0.5A,  
125 VDC Trip Alarm)  
IEC 60947-5-1 Approved  
(5A, 250 VAC; 0.5A, 110 VDC Auxiliary; 0.5A,  
125 VDC Trip Alarm)

\*Wire sizes: gauges specified are the minimum allowable as per CSA and UL standards.

The 9926 circuit breakers do not have provisions for marking tags. A possible solution is to cut the adhesive SchS2 tag rail to length (approximately 20 mm on a single pole unit so the current rating remains visible or approximately 30 mm on a two pole unit). The SchS2 accepts DEK, WS and ESG 8/17 marking tags. The part number for adhesive SchS2 is 1720600000.

#### 9926 Series—Supplemental Trip Curve

**Trip Curves—Hydraulic Magnetic Type Typical time/current characteristics at 30°C**

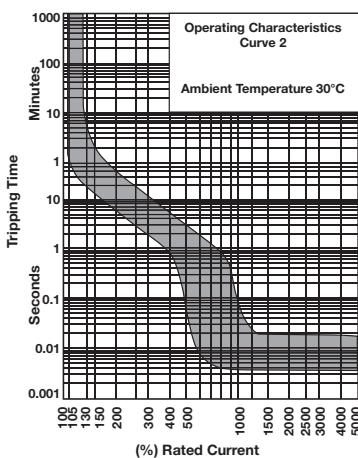

†CUPus recognized to UL1077 and C22.2 No. 235

### 9926 Series Single Pole w/ Auxiliary Contact<sup>‡</sup>



### 9926 Series Single Pole Trip (Alarm Contact)



### 9926 Series Single Pole Combination (Auxiliary & Alarm Contact)<sup>‡</sup>



#### Type: Single Pole Aux (up to 277 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926261501	QZ-A-1-13-D-2-01
2	9926261502	QZ-A-1-13-D-2-02
5	9926261505	QZ-A-1-13-D-2-05
10	9926261510	QZ-A-1-13-D-2-10
15	9926261515	QZ-A-1-13-D-2-15
20	9926261520	QZ-A-1-13-D-2-20
25	9926261525	QZ-A-1-13-D-2-25

#### Type: Single Pole Trip (up to 277 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926271501	QZ-T-1-13-D-2-01
2	9926271502	QZ-T-1-13-D-2-02
5	9926271505	QZ-T-1-13-D-2-05
10	9926271510	QZ-T-1-13-D-2-10
15	9926271515	QZ-T-1-13-D-2-15
20	9926271520	QZ-T-1-13-D-2-20
25	9926271525	QZ-T-1-13-D-2-25

#### Type: Single Pole Combo (up to 277 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926281501	QZ-AT-1-13-D-2-01
2	9926281502	QZ-AT-1-13-D-2-02
5	9926281505	QZ-AT-1-13-D-2-05
10	9926281510	QZ-AT-1-13-D-2-10
15	9926281515	QZ-AT-1-13-D-2-15
20	9926281520	QZ-AT-1-13-D-2-20
25	9926281525	QZ-AT-1-13-D-2-25

### 9926 Series Double Pole w/ Auxiliary Contact<sup>‡</sup>



### 9926 Series Double Pole Trip (Alarm Contact)



### 9926 Series Double Pole Combination (Auxiliary & Alarm Contact)<sup>‡</sup>



#### Type: Double Pole Aux (up to 480 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926262501	QZ-A-2-13-D-2-01
2	9926262502	QZ-A-2-13-D-2-02
5	9926262505	QZ-A-2-13-D-2-05
10	9926262510	QZ-A-2-13-D-2-10
15	9926262515	QZ-A-2-13-D-2-15
20	9926262520	QZ-A-2-13-D-2-20
25	9926262525	QZ-A-2-13-D-2-25

#### Type: Double Pole Trip (up to 480 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926272501	QZ-T-2-13-D-2-01
2	9926272502	QZ-T-2-13-D-2-02
5	9926272505	QZ-T-2-13-D-2-05
10	9926272510	QZ-T-2-13-D-2-10
15	9926272515	QZ-T-2-13-D-2-15
20	9926272520	QZ-T-2-13-D-2-20
25	9926272525	QZ-T-2-13-D-2-25

#### Type: Double Pole Combo (up to 480 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926282501	QZ-AT-2-13-D-2-01
2	9926282502	QZ-AT-2-13-D-2-02
5	9926282505	QZ-AT-2-13-D-2-05
10	9926282510	QZ-AT-2-13-D-2-10
15	9926282515	QZ-AT-2-13-D-2-15
20	9926282520	QZ-AT-2-13-D-2-20
25	9926282525	QZ-AT-2-13-D-2-25

### 9926 Series Triple Pole w/ Auxiliary Contact<sup>‡</sup>



### 9926 Series Triple Pole Trip (Alarm Contact)



### 9926 Series Triple Pole Combination (Auxiliary & Alarm Contact)<sup>‡</sup>



#### Type: Triple Pole Aux (up to 480 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926263501	QZ-A-3-13-D-2-01
2	9926263502	QZ-A-3-13-D-2-02
5	9926263505	QZ-A-3-13-D-2-05
10	9926263510	QZ-A-3-13-D-2-10
15	9926263515	QZ-A-3-13-D-2-15
20	9926263520	QZ-A-3-13-D-2-20
25	9926263525	QZ-A-3-13-D-2-25

#### Type: Triple Pole Trip (up to 480 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926273501	QZ-T-3-13-D-2-01
2	9926273502	QZ-T-3-13-D-2-02
5	9926273505	QZ-T-3-13-D-2-05
10	9926273510	QZ-T-3-13-D-2-10
15	9926273515	QZ-T-3-13-D-2-15
20	9926273520	QZ-T-3-13-D-2-20
25	9926273525	QZ-T-3-13-D-2-25

#### Type: Triple Pole Combo (up to 480 VAC)

Current Ratings		
(amps)	Part No.	Description
1	9926283501	QZ-AT-3-13-D-2-01
2	9926283502	QZ-AT-3-13-D-2-02
5	9926283505	QZ-AT-3-13-D-2-05
10	9926283510	QZ-AT-3-13-D-2-10
15	9926283515	QZ-AT-3-13-D-2-15
20	9926283520	QZ-AT-3-13-D-2-20
25	9926283525	QZ-AT-3-13-D-2-25

**9926 Series Supplemental Circuit Breakers-GFCI**

## **Ground Fault Current Interrupt**

- CE approved
  - UL1077 and UL1053 recognized
  - Small frame size (26mm wide)
  - Single pole plus switched neutral ground leakage protection
  - Trip point is unaffected by ambient temperature
  - Current ratings up to 50A
  - Trip indication  
(mid trip handle position)
  - Trip curve 2 for general purpose applications

**9926 Series  
GFCI**



## Ordering Data

---

---

---

---

---

---

---

Technical Data

Standard Ampere Ratings (A)	5 to 50A
Sensitivity (mA)	30 (CE) / 22 (UL)
Number of Poles	1 + N
Equipment Type	Ground Leakage/GFCFS
Rated Voltage (V)	230 (CE) / 240 (UL)
Rated Interrupting/ Withstand Capacity (kA)	5 kA —
Weight (kg)	0.26
Trip Curve (standard)	2
Operating Temperature	-40 to +65°C

## Approval


UL 1077 and UL 1053, CE

Type: Single Pole GFCI


<b>Current Ratings</b>	<b>Part No.</b>	<b>Description</b>
(amps)		
5	<b>9926291105</b>	QF17A2505 - CB W/GFI
10	<b>9926291110</b>	QF17A2510 - CB W/GFI
15	<b>9926291115</b>	QF17A2515 - CB W/GFI
20	<b>9926291120</b>	QF17A2520 - CB W/GFI
25	<b>9926291125</b>	QF17A2525 - CB W/GFI
30	<b>9926291130</b>	QF17A2530 - CB W/GFI
50	<b>9926291150</b>	QF17A2550 - CB W/GFI

9926 Series-AC version Trip Curve

### Trip Curves—Hydraulic Magnetic Type Typical time/current characteristics at 30°C

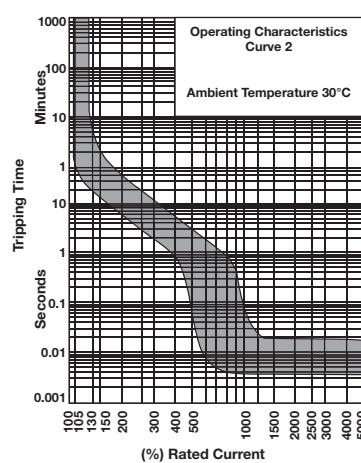

#### **9926 Series GFCI – dimensions in mm (in.)**

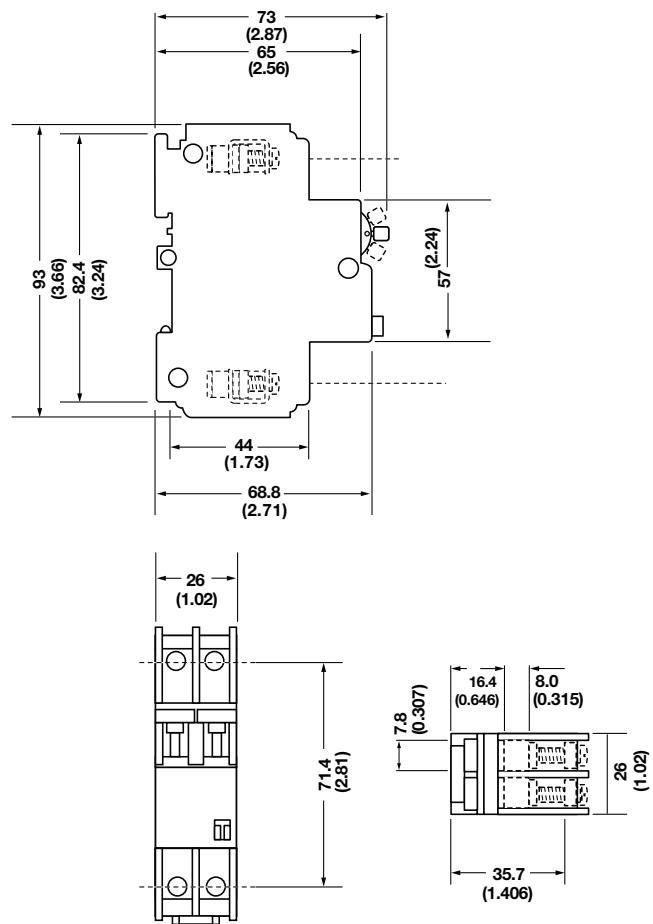


## 9926 Series Mounting Options and Accessories

### Mounting Options


If the product is not vertically mounted in the normal DIN-rail mounting orientation, a rating factor must be applied. Figure 1 shows a diagram of the rating factor to apply. The published curves for these circuit breaker products are produced with the circuit breaker in the vertical mounting position. The rating factor only applies to the must hold and must trip points of the curve as the other parts (instantaneous trip point) stay largely unaffected.

It is important to note that in environments that are exposed to a high degree of vibration, the cables that connect to the circuit breaker must be securely held in place, as the breaker is not designed to carry the weight of the cables. A maximum of 35N can be applied to the terminal area, in a direction perpendicular to the mounting axis.

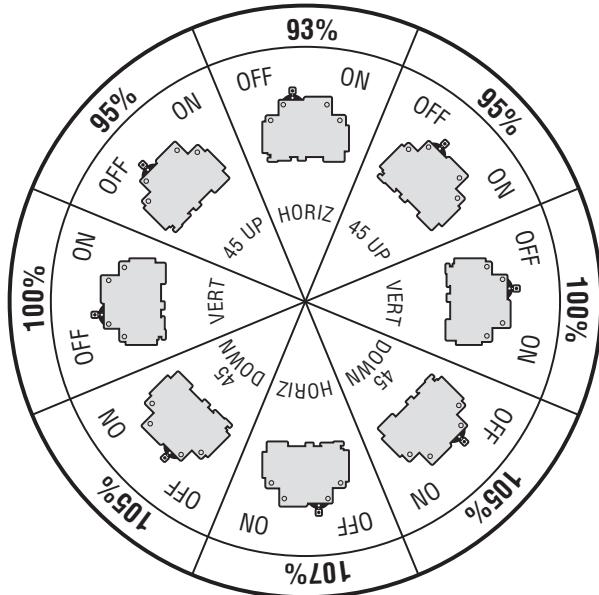

### Accessories

Technical Data	
Current Rating	80A max.
Voltage	500V max.
Short Circuit Strength	25kA
Type	Part No.
Bus bar (1 pole, insulated 1m)	67101904
Bus bar (2 pole, insulated 1m)	67101972
Bus bar (3 pole, insulated 1m)	67101971

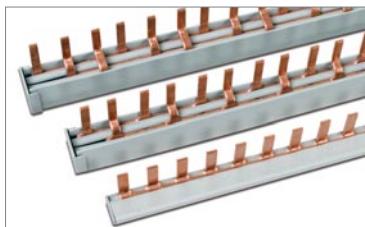

Type	Part No.
Bus bar end cap, 1 pole	67101973
Bus bar end cap, 2 pole or 3 pole	67101974



Technical Data	
Current Rating	85A max.
Wire Size	10 AWG min., 4 AWG max.
Dimensions	A: 6 mm B: 32 mm
Type	Part No.
Power lug, straight	67101960
Power lug, 90°	67101961



Type	Part No.
Lock-out handle	67101913



### Part Number Table - Example

To order 9926 Series Single Pole Circuit Breaker

Part No. 992625100

- Current Rating of 1.0 amp
- Internal Resistance per Pole of 1.1 ohms
- Trip Curve – M1, Medium (Standard)

9 9 2 6 2 | 5 1 | 0 0 0

Amperage  
 "00" - 0.5A  
 "01" - 1A  
 "02" - 2A  
 /  
 "60" - 60A

Trip Curves (Types 5-9)  
 "0" - Branch AC KM (Standard)  
 "1" - Branch AC OP (Instantaneous)  
 "2" - Branch AC 1 (Fast)  
 "3" - Supplemental 9 (Slow)  
 "4" - Branch 80VDC 1 (Fast)  
 "5" - Supplemental 2 (Standard)  
 "6" - Branch 125VDC OP (Instantaneous)  
 "7" - Branch 80VDC OP (Instantaneous)  
 "8" - Branch 125VDC U2 (Standard)  
 "9" - Branch 80VDC U2 (Standard)

#### Poles

1 Pole  
 2 Pole  
 3 Pole

#### Type

"5" - Base Breaker  
 "6" - With Auxiliary Contact  
 "7" - With Trip Alarm Contact  
 "8" - Combo Aux/Trip Contact  
 "9" - GFCI

9 9 2 6 2 | 4 1 | 0 0 0

Amperage  
 "00" - 0.5A  
 "01" - 1A  
 "02" - 2A  
 /  
 "60" - 60A

Trip Curves (Type 4)  
 "0" - Supplemental 1 (Slow)  
 "1" - Supplemental 3 (Fast)  
 "3" - Branch AC 9 (Slow)

#### Poles

1 Pole  
 2 Pole  
 3 Pole

#### Type

"4" - Base Breaker

## CB4200 Series Supplemental Circuit Breakers

### Circuit Breakers Thermal Magnetic Type

- Rated from 0.05 to 16.0 amps
- Available in single or double pole configurations
- Features a tease free design to reduce contact damage
- Offers push button trip/reset function
- Trip free design means the breaker cannot be held closed against a fault
- Mounts on 32mm\* or 35mm DIN-rail
- UL 1077 recognized
- CSA C22.2 No. 235

### CB4200 Series Single Pole



### CB4200 Series Double Pole



#### Ordering Data

Current Ratings (amps)	Part No. TS 35
*For TS 32 Rail, see adapter below	
0.05	9124083500
0.08	9124653500
0.1	9104173500
0.2	9104183500
0.3	9129813500
0.4	9124093500
0.5	9101003500
0.6	9124113500
0.7	9129563500
0.8	9101103500
1.0	9101203500
1.2	9101303500
1.3	9124123500
1.4	9124133500
1.5	9101403500
1.8	9124143500
2.0	9101503500
2.5	9101603500
3.0	9101703500
3.5	9124163500
4.0	9104353500
4.5	9124173500
5.0	9101803500
5.5	9107833500
6.0	9103813500
6.5	9120043500
7.0	9104153500
8.0	9103003500
9.0	9104613500
10.0	9101903500
11.0	9124183500
12.0	9107843500
13.0	9124193500
14.0	9107853500
15.0	9102003500
16.0	9124213500

Type: Single Pole
Current Ratings (amps)
Part No. TS 35
*For TS 32 Rail, see adapter below
0.05
0.08
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
1.0
1.2
1.3
1.4
1.5
1.8
2.0
2.5
3.0
3.5
4.0
4.5
5.0
5.5
6.0
6.5
7.0
8.0
9.0
10.0
11.0
12.0
13.0
14.0
15.0
16.0

Type: Double Pole
Current Ratings (amps)
Part No. TS 35
*For TS 32 Rail, see adapter below
0.05
0.08
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
1.0
1.2
1.3
1.4
1.5
1.8
2.0
2.5
3.0
3.5
4.0
4.5
5.0
5.5
6.0
6.5
7.0
8.0
9.0
10.0
11.0
12.0
13.0
14.0
15.0
16.0


#### Trip Curves

#### Thermal Magnetic Type


Typical time/current characteristics at 23°C

#### CB4200 Series


##### M1+ 0.05 to 7.5 A

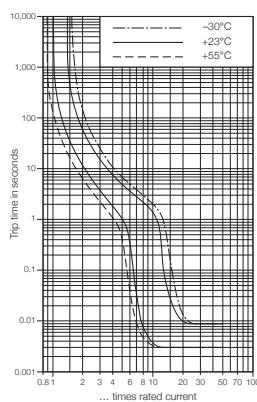

##### M1+ 8 to 16 A

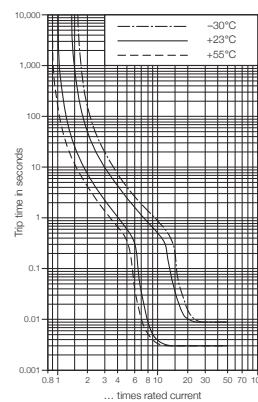


\*Adapter foot – dimensions in mm (in.)

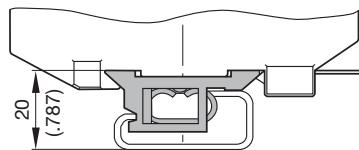


9102100000  
TS32 adapter

# CB4200 Series Supplemental Circuit Breakers


## CB4200 Series Single Pole




## Internal Wiring Diagram



## CB4200 Series Double Pole

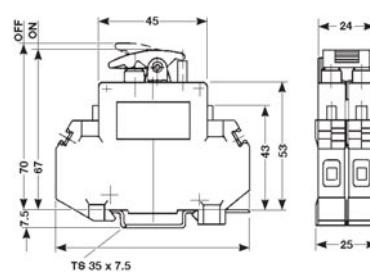

## Internal Wiring Diagram



### Technical Data

Rated voltage & current<sup>†</sup>

UL	
CSA	
VDE	

Creepage resistance

Dielectric strength

Insulation resistance

Interrupting capacity

(VDE 0660, Part 101, P-2)

Interrupting capacity: 4201

(UL 1077/EN 60934 PC1)

Typical life at 2 x rated current

Shock

Torque

Vibration

Temperature range

Corrosion

Humidity

Weight

Wire size (UL)

### Voltage Ratings

AC 250 V, DC 65 V, 50/60 Hz 0.05...16 A

AC 250 V, DC 65 V, 50/60 Hz 0.05...16 A

AC 250 V, DC 65 V, 50/60 Hz 0.05...16 A

PTI 600 to IEC 112

4,000 VAC; IEC 664 & 664 A

> 100 MΩ (DC 500 V)

4201-10 Maximum capacity

0.05...0.8 A Self-limiting

1...2 A 200 A

2.5...16 A 400 A

Rated current Rated voltage Maximum capacity

0.05...2.0 A AC 250 V 200 A

2.0...16 A AC 250 V 200 A

20 A AC 125 V 400 A

5,000 operations

25 g (11 ms) to IEC 68-2-27, Test Ea

1.2 Nm

5 g (57 to 500 Hz / ±0.38 mm, 10 to 57 Hz) to IEC 68-2-6, Test Fc

-30°C...+65°C (-22°F...+131°F)

96 hours at 5% salt spray, to IEC 68-2-11, Test Ka

240 hours at 95% RH, to IEC 68-2-3, Test Ca

60 g per pole

#20...8 AWG solid/0.5...6 mm<sup>2</sup>

### Accessories

Jumpers

Daisy Chain 50\* 9970290000

Straight CQB\*\* insulated 9970560000

Angled CQB\*\* insulated 9970570000

CQB 4 9970580000

CQB 10 9970590000

CQB 2 9970600000

CQB 3 9970610000

CQB 4 9970620000

CQB 10 9970630000

MCBAF/TS 32 9102100000

Adapter foot (for TS 32 Rail) 6720000227

Busbar Single pole 1 meter 6720000227

Busbar end cap for 6720000227 6720000225

Power lug for 6720000227 6720000226

Adapter foot (for TS 32 Rail)

Busbar Single pole 1 meter

Busbar end cap for 6720000227

Power lug for 6720000227

### Marking Tags

Note: Part numbers are shown for a single card of pre-printed tags numbered 1-50.

Special print only  
Consecutive horizontal tags  
Consecutive vertical tags

WS 8/5 MC 1640750000\*\*

DEK 5/5 0473460001

DEK 5/5 0473560001

\*Note: Resistive and inductive loads (0.05 - 16 A)

\*BDC will accommodate 20 A per pin, 20 A total

\*\*CQB will accommodate 18 A per pin, 18 A total; dedicated to 4201 Series

\*\*Please specify horizontal or vertical print when ordering.

Standard quantity = 144 tags per card.

## CB2200 Series Supplemental Circuit Breakers

### Circuit Breakers Thermal Magnetic Type

- Rated from 0.1 to 32.0 amps
- Available in single, double and triple pole configurations
- Offers normally open (N/O) and normally closed (N/C) auxiliary contacts
- Lever-switch trip/reset function
- Mounts on 32mm or 35mm DIN-rail
- UL 1077 recognized
- CSA C22.2 No. 235

### CB2200 Series Single Pole



### CB2200 Series Double Pole



### CB2200 Series Triple Pole



#### Ordering Data

#### Type: Single Pole\*

Current Ratings (amps)	N/O Aux. Part No.
0.1	9911010005
0.2	9911020005
0.3	9911030005
0.4	9911040005
0.5	9911050005
0.6	9911060005
0.8	9911080005
1.0	9911100005
1.5	9911150005
2.0	9911200005
2.5	9911250005
3.0	9911300005
4.0	9911400005
5.0	9911500005
6.0	9911600005
8.0	9911800005
10	9921100005
12	9921120005
15	9921150005
16	9921160005
18	9921180005
20	9921200005
25	9921250005
32	9921320005

#### Type: Double Pole

Current Ratings (amps)	N/O-N/C Part No.
0.1	9912010003
0.2	9912020003
0.3	9912030003
0.4	9912040003
0.5	9912050003
0.6	9912060003
0.8	9912080003
1.0	9912100003
1.5	9912150003
2.0	9912200003
2.5	9912250003
3.0	9912300003
4.0	9912400003
5.0	9912500003
6.0	9912600003
8.0	9912800003
10	9922100003
12	9922120003
15	9922150003
16	9922160003
18	9922180003
20	9922200003

#### Type: Triple Pole

Current Ratings (amps)	N/O-N/C Part No.
0.1	9913010003
0.2	9913020003
0.3	9913030003
0.4	9913040003
0.5	9913050003
0.6	9913060003
0.8	9913080003
1.0	9913100003
1.5	9913150003
2.0	9913200003
2.5	9913250003
3.0	9913300003
4.0	9913400003
5.0	9913500003
6.0	9913600003
8.0	9913800003
10	9923100003
12	9923120003
15	9923150003
16	9923160003
18	9923180003
20	9923200003

\*All part numbers with N/O Auxiliary Contacts on each pole when the main breaker contact is open (in the OFF position)

#### Ordering Data

#### Type: Single Pole

All part numbers with N/C Auxiliary Contacts on each pole when the main breaker contact is open (in the OFF position)

Current Ratings (amps)	Part No.
0.1	9911010000
0.2	9911020000
0.3	9911030000
0.4	9911040000
0.5	9911050000
0.6	9911060000
0.8	9911080000
1.0	9911100000
1.5	9911150000
2.0	9911200000
2.5	9911250000
3.0	9911300000
4.0	9911400000
5.0	9911500000
6.0	9911600000
8.0	9911800000
10	9921100000
12	9921120000
15	9921150000
16	9921160000
18	9921180000
20	9921200000
25	9921250000
32	9921320000

#### Type: Double Pole

Current Ratings (amps)	Part No.
0.1	9912010000
0.2	9912020000
0.3	9912030000
0.4	9912040000
0.5	9912050000
0.6	9912060000
0.8	9912080000
1.0	9912100000
1.5	9912150000
2.0	9912200000
2.5	9912250000
3.0	9912300000
4.0	9912400000
5.0	9912500000
6.0	9912600000
8.0	9912800000
10	9922100000
12	9922120000
15	9922150000
16	9922160000
18	9922180000
20	9922200000
25	9922250000
32	9922320000

#### Type: Triple Pole


Current Ratings (amps)	Part No.
0.1	9913010000
0.2	9913020000
0.3	9913030000
0.4	9913040000
0.5	9913050000
0.6	9913060000
0.8	9913080000
1.0	9913100000
1.5	9913150000
2.0	9913200000
2.5	9913250000
3.0	9913300000
4.0	9913400000
5.0	9913500000
6.0	9913600000
8.0	9913800000
10	9923100000
12	9923120000
15	9923150000
16	9923160000
18	9923180000
20	9923200000
25	9923250000
32	9923320000

# CB2200 Series Supplemental Circuit Breakers

## CB2200 Series

Trip Curves – Thermal Magnetic Type  
Typical time/current characteristics at 23°C

### CB2200 Series

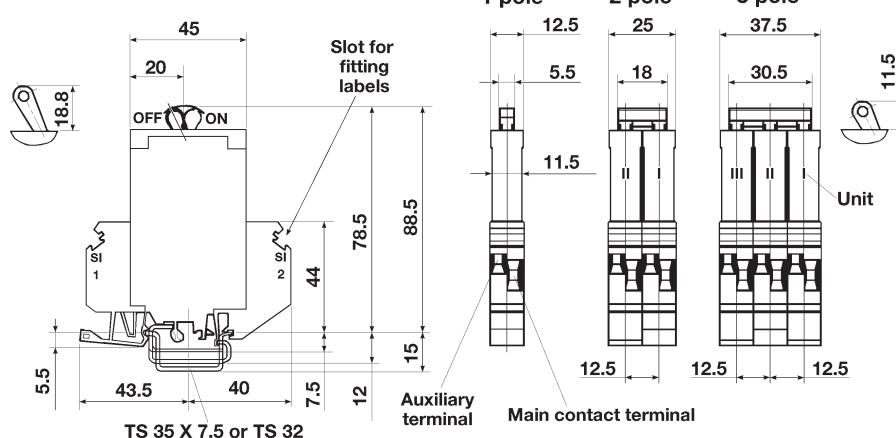

#### Technical Data

Rated voltage & current<sup>†</sup>

UL	
CSA	
VDE	

Auxiliary contacts

Creepage resistance

Dielectric strength

Insulation resistance

Interrupting capacity

(VDE 0660, Part 101, P-2)

Interrupting capacity

(UL 1077/EN 60934 PC1)

Typical life at 2 x rated current

Shock

Torque	Nm (lb. in.)
--------	--------------

Vibration

Temperature range

Corrosion

Humidity

Weight

Wire size (UL)

#### Accessories

Jumpers	Daisy Chain 50
Busbars	

#### Marking Tags

1 2 3 4 5 6

Special print only

Consecutive horizontal


Note: Part numbers shown are for a single card of pre-printed tags numbered 1-50.

Consecutive vertical


<sup>†</sup>Note: Resistive and inductive loads (0.05 - 16 A)

\*Please specify horizontal or vertical print when ordering.


#### 1 pole      2 pole      3 pole

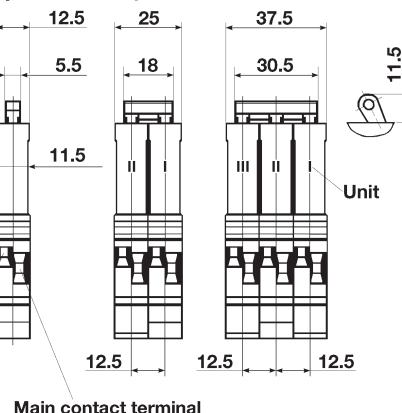


#### F1 0.1 to 32 A




#### -M1 0.1 to 7.5 A




#### -M1 8 to 32 A



#### -T1 0.1 to 7.5 A



#### -T1 8 to 32 A



## CB9100 Series Supplemental Circuit Breakers

### Circuit Breakers Thermal Magnetic Type

- Rated from 0.5 to 63 amps
- Available in single, double and triple pole configurations
- Optional auxiliary contacts
- Mounts on 35mm DIN-rail
- UL and CSA approvals
- CSA 277 VAC (1 pole) or 480 VAC (2 and 3 pole)
- 50 VDC (0.5 A to 50 A) 1 pole
- 110 VDC (0.5 A to 50 A) 2 pole

### CB9100 Series Single Pole



### CB9100 Series Double Pole



### CB9100 Series Triple Pole



#### Ordering Data

Type: Single Pole	Type: Double Pole	Type: Triple Pole
Current Ratings (amps)	Current Ratings (amps)	Current Ratings (amps)
0.5	0.5	0.5
1.0	1.0	1.0
2.0	2.0	2.0
3.0	3.0	3.0
4.0	4.0	4.0
6.0	6.0	6.0
10.0	10.0	10.0
13.0	13.0	13.0
16	16	16
20	20	20
25	25	25
32	32	32
40	40	40
50	50	50
63	63	63


#### Trip Curves

#### Thermal Magnetic Type


Typical time/current characteristics at 23°C

#### CB9100 Series


##### M1      0.5 to 6 A

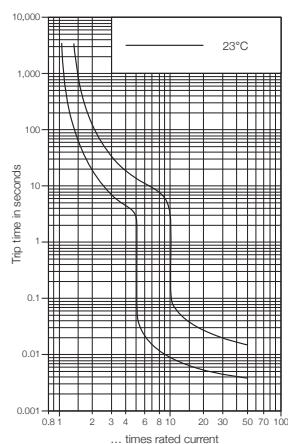

##### M1      AC 10 to 40 A

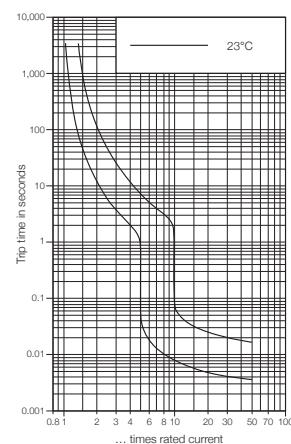


##### M1      AC 63 A

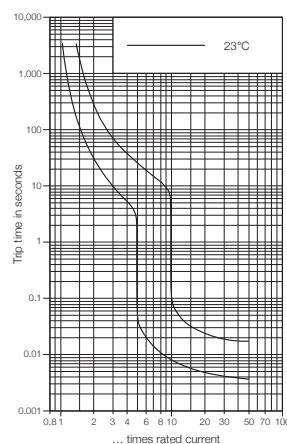


# CB9100 Series Supplemental Circuit Breakers

## CB9100 Series

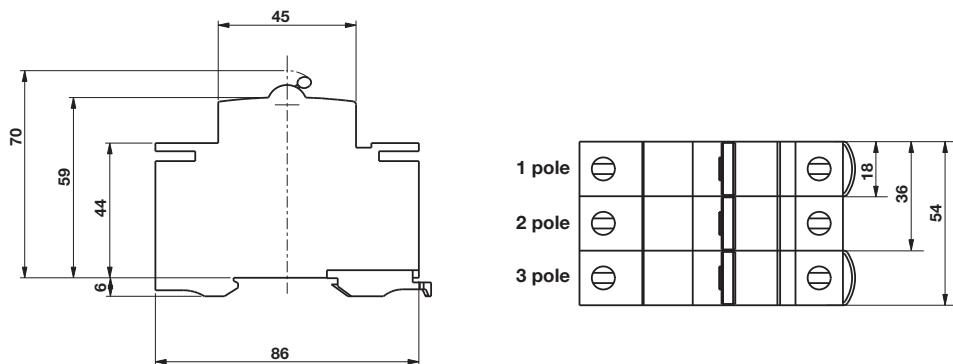

Dimensions in mm

### Internal Wiring Diagram

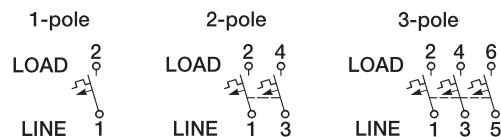

#### Technical Data

Rated voltage & current

UL 1077	277 V (1 pole)	480 V (2 and 3 pole)	50 VDC (1 pole)	110 VDC (2 pole)
CSA C 22.2 No. 235	277 V (1 pole)	480 V (2 and 3 pole)	50 VDC (1 pole)	110 VDC (2 pole)

VDE

Creepage resistance

Insulation resistance

Interrupting capacity  
(UL 1077/EN 609334 PC1) 1 pole

Mechanical/Electrical endurance

Shock

Torque

Vibration

Temperature range - operating

Weight

Strip length

Auxiliary contact rating

Wire size - #22...12 AWG

Wire size

#### Accessories

Jumpers

Auxiliary contacts


SPDT

Security hardware


#### Marking Tags

Adhesive label

### Auxiliary Contact Modules

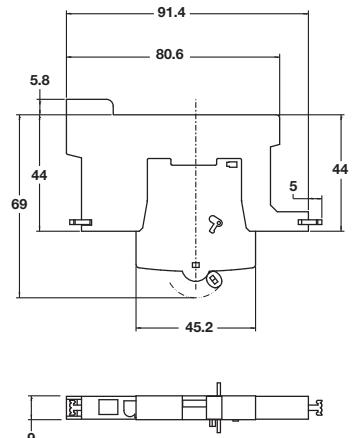

### Internal Auxiliary Wiring Diagram



Type	Current Side/Middle	Part No.
3 pole bus, 10 x 1010 mm, busses (19) 3 phase groupings	80A/100A	9970330000
3 pole bus, 16 x 210 mm, busses (4) 3 phase groupings	120A/130A	9970340000
3 pole bus, 16 x 1010 mm, busses (19) 3 phase groupings	120A/130A	9970350000
1 pole bus, 12 x 210 mm, busses 12 breakers	80A/100A	9970360000
1 pole bus, 12 x 210 mm (insulated), busses 12 breakers	63A	9991990000
Bus bar clamp	130A	9970370000

Auxiliary contacts	9970300000
Lock out cover	9970380000

ETO 10/26, yellow (26 mm x 10 mm)	1686401687
-----------------------------------	------------