


G3VM-61PR□/71PR/81PR/101PR

MOS FET Relays USOP, Small and High-load-voltage Type

USOP Package with High Load voltage

- Load voltage: 60 V, 75 V, 80 V, or 100 V
- G3VM-61PR1: Low $C \times R = 7 \text{ pF} \cdot \Omega$, C_{OFF} (standard) = 0.7 pF, R_{ON} (standard) = 10 Ω

RoHS Compliant

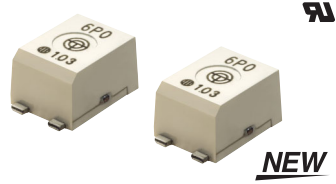


Note: The actual product is marked differently from the image shown here.

Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & measurement equipment
- Data loggers


Package (Unit : mm, Average)

USOP 4-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend



- | | | |
|--|---|--|
| 1. Load Voltage
6: 60 V
7: 75 V
8: 80 V
10: 100 V | 2. Contact form
1: 1a (SPST-NO) | 3. Package
P: USOP 4-pin |
| 4. Additional functions
R: Low On-resistance | | 5. Other informations
When specifications overlap, serial code is added in the recorded order. |

Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Tape cut packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
USOP4	1a (SPST-NO)	Surface-mounting Terminals	60 V	120 mA	G3VM-61PR1	1 pc.	G3VM-61PR1(TR05)	500 pcs.
			75 V	400 mA	G3VM-61PR		G3VM-61PR(TR05)	
			80 V	120 mA	G3VM-81PR		G3VM-81PR(TR05)	
			100 V	100 mA	G3VM-101PR		G3VM-101PR(TR05)	

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR05)" to the end of the model number.
 Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them.
 Refer to common precautions.
 * The AC peak and DC value are given for the load voltage and continuous load current.

G3VM-61PR□/71PR/81PR/101PR

MOS FET Relays

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	G3VM-61PR1	G3VM-61PR	G3VM-71PR	G3VM-81PR	G3VM-101PR	Unit	Measurement conditions	
LED forward current	IF	50						mA	
LED forward current reduction rate	$\Delta I_F/\text{°C}$	-0.5						mA/°C	Ta ≥ 25°C
LED reverse voltage	VR	5						V	
Connection temperature	TJ	125						°C	
Load voltage (AC peak/DC)	V _{OFF}	60		75	80	100	V		
Continuous load current (AC peak/DC)	I _o	120	400	120	100		mA		
ON current reduction rate	$\Delta I_o/\text{°C}$	-1.2	-4	-1.2	-1		mA/°C	Ta ≥ 25°C	
Pulse ON current	I _{op}	360	1,200	360	300		mA	Ia = 100 ms, Duty = 1/10	
Connection temperature	TJ	125						°C	
Dielectric strength between I/O (See note 1.)	V _{I-O}	500						V _{rms}	AC for 1 min
Ambient operating temperature	Ta	-40 to +85						°C	With no icing or condensation
Ambient storage temperature	T _{stg}	-40 to +125						°C	
Soldering temperature	-	260						°C	

Note 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol		G3VM-61PR1	G3VM-61PR	G3VM-71PR	G3VM-81PR	G3VM-101PR	Unit	Measurement conditions
LED forward voltage	V _F	Minimum	1.0					V	IF = 10 mA
		Typical	1.15						
		Maximum	1.3						
Reverse current	I _R	Maximum	10					μA	V _R = 5 V
Capacitance between terminals	C _T	Typical	15					pF	V = 0, f = 1 MHz
Trigger LED forward current	I _{FT}	Typical	1.0	0.5	0.6	0.5	mA	I _o = 100 mA	
		Maximum	3						
Release LED forward current	I _{FC}	Minimum	0.1	0.2	0.1		mA	I _{OFF} = 10 μA	
		Typical	10	1	7	8			
Maximum resistance with output ON	R _{ON}	Maximum	15	1.5	12	14	Ω	G3VM-61PR : I _F = 5 mA, I _o = 400 mA Others : I _F = 5 mA, I _o = Continuous load current ratings, t < 1 s	
		Typical	10	1	7	8			
Current leakage when the relay is open	I _{LEAK}	Maximum	1			0.02	0.2	nA	V _{OFF} = Load voltage ratings
Capacitance between terminals	C _{OFF}	Typical	0.7	20	30	5	6	pF	G3VM-61PR : V = 0, f = 1 MHz, t < 1 s Others : V = 0, f = 100 MHz, t < 1 s
		Maximum	1.3	30	-	7	8		
Capacitance between I/O terminals	C _{I-O}	Typical	0.4	0.3	0.4		pF	f = 1 MHz, V _s = 0 V	
Insulation resistance between I/O terminals	R _{I-O}	Maximum	1000					MΩ	V _{I-O} = 500 VDC, R _{oH} ≤ 60%
		Typical	10 ⁸						
Turn-ON time	t _{ON}	Typical	0.04	0.3	0.4	0.14	0.12	ms	I _F = 5 mA, R _L = 200 Ω, V _{DD} = 20 V (See note 2.)
		Maximum	0.2	0.5	2	0.5	0.3		
Turn-OFF time	t _{OFF}	Typical	0.12	0.3	0.2	0.16	0.18	ms	I _F = 5 mA, R _L = 200 Ω, V _{DD} = 20 V (See note 2.)
		Maximum	0.2	0.5	1	0.2	0.3		

Note 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61PR1	G3VM-61PR	G3VM-71PR	G3VM-81PR	G3VM-101PR	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48		60	64	80	V
		Minimum	5					
Operating LED forward current	I _F	Typical	7.5					mA
		Maximum	20					
		Minimum						
Continuous load current (AC peak/DC)	I _o	Maximum	120	400	120	100	mA	
		Minimum	-20					
Ambient operating temperature	Ta	Minimum	-40					°C
		Maximum	65					

Engineering Data


LED forward current vs. Ambient temperature

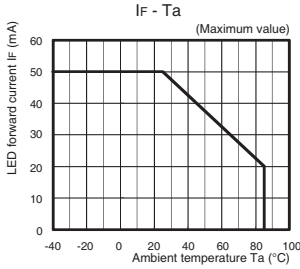


Continuous load current vs. Ambient temperature

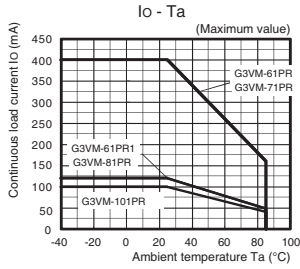


LED forward current vs. LED forward voltage

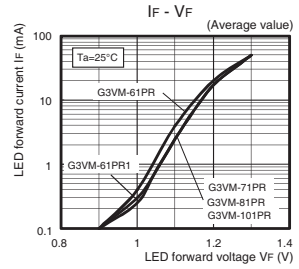


Continuous load current vs. On-state voltage

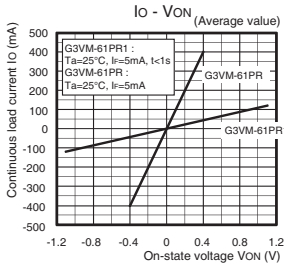


G3VM-71PR/81PR/101PR

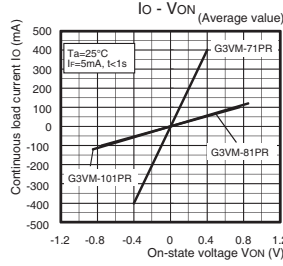


On-state resistance vs. Ambient temperature

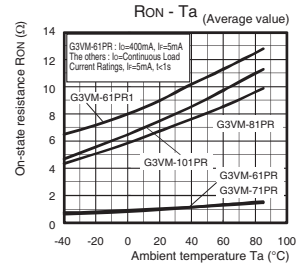


Trigger LED forward current vs. Ambient temperature

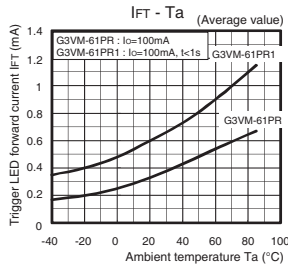


G3VM-71PR/81PR/101PR

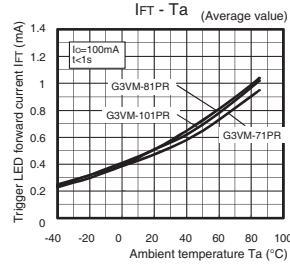

Turn ON, Turn OFF time vs. LED forward current

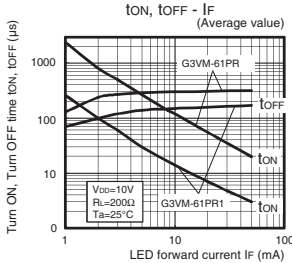

G3VM-71PR/81PR/101PR

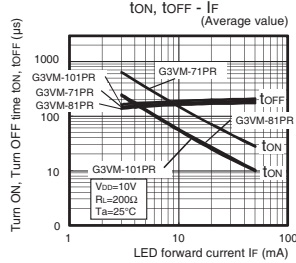


Introduction
 General purpose
 High-side-voltage
 Multi-contact pair
 High-current and
 Low-VOL resistance
 Small and high
 dielectric strength
 High dielectric
 strength
 Current-limiting
 Low on-state resistance
 and low on-resistance
 Small and high
 on-voltage
 Certified models with
 Schematics derivation
 DIP
 SOP
 SSOP
 USOP
 VSON
 G3VM-61PR□/71PR/81PR/101PR

Engineering Data

Turn ON, Turn OFF time vs.


Ambient temperature

G3VM-61PR1/61PR

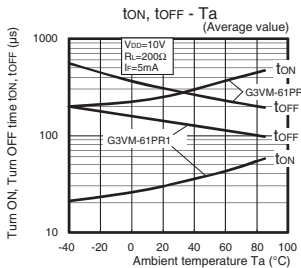


Output terminal capacitance vs. Load voltage


G3VM-61PR1/61PR

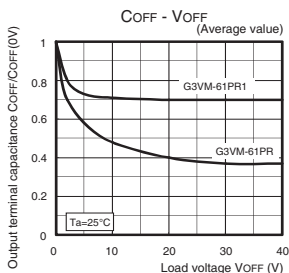

G3VM-71PR/81PR/101PR

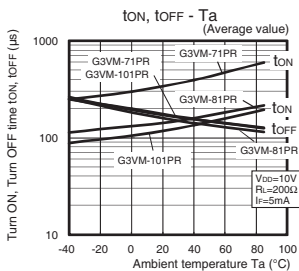


G3VM-71PR/81PR/101PR

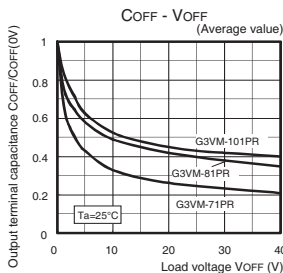


Current leakage vs.

Load voltage

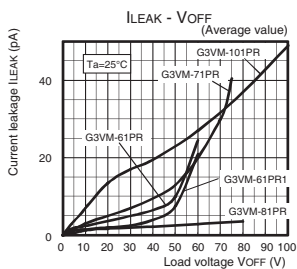

Current leakage vs. Ambient temperature

G3VM-71PR

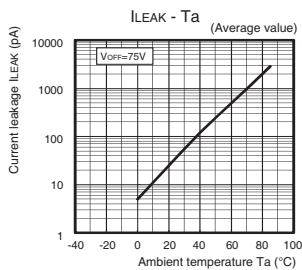


■ Appearance / Terminal Arrangement / Internal Connections

● Appearance

USOP (Ultra Small Outline Package)


USOP 4-pin



* Actual model name marking for each model


Model	Marking
G3VM-61PR1	6P1
G3VM-61PR	6P0
G3VM-71PR	7P0
G3VM-81PR	8P0
G3VM-101PR	AP0

● Terminal Arrangement/Internal Connections (Top View)




Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.

■ Dimensions (Unit: mm)

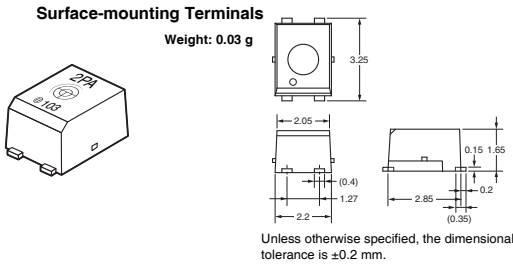

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.2 mm.

Note: The actual product is marked differently from the image shown here.

■ Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL recognized	1a (SPST-NO)	E80555

■ Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Introduction
 General-purpose
 High-side-voltage
 Multi-contact pair
 Low-side-voltage
 High-current and
 Low-ohmic-resistance
 Small and high-
 dielectric-strength
 High-dielectric-
 strength
 Current-limiting
 Low-ohmic-resistance
 and low-voltage
 Small and High-
 voltage
 Certified Models with
 Schematics Certification
 DIP
 SOP
 SSOP
 USOP
 VSON
 G3VM-61PR□/71PR/81PR/101PR