


Wirewound Resistors, High Energy, Silicone Coated, Axial Lead


FEATURES

- High continuous energy handling up to 106.5 J
- High temperature silicone coating
- Complete welded construction
- Excellent stability in operation
- High power to size ratio
- Material categorization:
for definitions of compliance please see
www.vishay.com/doc?99912

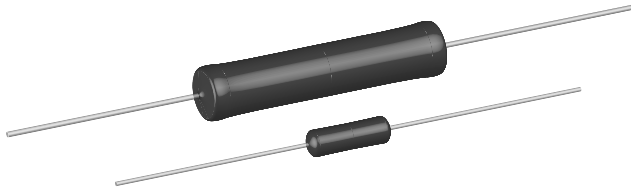

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | |
|------------------------------------|--|--|------------------------------|--------------------------------------|----------------------|--------------------|
| GLOBAL MODEL | POWER RATING ⁽¹⁾ $P_{25\text{ }^\circ\text{C}}$ W CHARACTERISTIC U +250 °C | POWER RATING ⁽¹⁾ $P_{25\text{ }^\circ\text{C}}$ W CHARACTERISTIC V +350 °C | RESISTANCE RANGE Ω | MAXIMUM SHORT TERM PULSE ENERGY J | TOLERANCE \pm % | WEIGHT (max.) g |
| CW02B...HE | 3.0 | 3.75 | 1.5 to 87.5 | 10.4 | 5, 10 | 0.7 |
| CW005...HE | 5.0 | 6.5 | 5.5 to 343.6 | 39.1 | 5, 10 | 4.2 |
| CW010...HE | 10.0 | 13.0 | 15.0 to 938.0 | 106.5 | 5, 10 | 9.0 |

Note

⁽¹⁾ Vishay Dale CW...HE models have two power ratings, depending on operating temperature and stability requirements.

| TECHNICAL SPECIFICATIONS | | |
|-----------------------------|--------|--|
| PARAMETER | UNIT | CW...HE RESISTOR CHARACTERISTICS |
| Temperature Coefficient | ppm/°C | \pm 30 for 10 Ω and above, \pm 50 for 1.0 Ω to 9.9 Ω |
| Short Time Overload | - | 5x rated power for 5 s for CW02B...HE 10x rated power for 5 s for CW005...HE and CW010...HE |
| Terminal Strength | lb | 10 minimum |
| Maximum Working Voltage | V | $(P \times R)^{1/2}$ |
| Operating Temperature Range | °C | Characteristic U = -65 to +250, characteristic V = -65 to +350 |
| Power Rating | - | Characteristic U = +250 °C max. hot spot temperature, \pm 0.5 % max. ΔR in 2000 h load life Characteristic V = +350 °C max. hot spot temperature, \pm 3.0 % max. ΔR in 2000 h load life |

| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | | |
|---|---|------------------------------------|---|-------------------------------------|---|--|---|---|---|---|-------------------------|---|---|---|---|--|
| Global Part Numbering example: CW02B10R00JE12HE | | | | | | | | | | | | | | | | |
| C | W | 0 | 2 | B | 1 | 0 | R | 0 | 0 | J | E | 1 | 2 | H | E | |
| GLOBAL MODEL (5 digits) | | VALUE (5 digits) | | TOLERANCE (1 digit) | | PACKAGING (3 digits) | | | | | SPECIAL (2 to 3 digits) | | | | | |
| CW02B CW005 CW010 | | R = Decimal 10R00 = 10 Ω | | J = \pm 5.0 % K = \pm 10.0 % | | E70 = Lead (Pb)-free, tape/reel, 1K pcs. (CW02B only) E73 = Lead (Pb)-free, tape/reel, 500 pcs. E12 = Lead (Pb)-free, bulk S70 = Tin/lead, tape/reel, 1K pcs. (CW02B only) S73 = Tin/lead, tape/reel, 500 pcs. B12 = Tin/lead, bulk | | | | | HE = High energy | | | | | |






STANDARD ENERGY PERFORMANCE CHARACTERISTICS

| GLOBAL MODEL | RESISTANCE RANGE Ω | MAX. PULSE ENERGY J/ Ω | FUSING ENERGY J/ Ω | CURRENT TO FUSE ⁽¹⁾ A/ Ω | POWER TO FUSE ⁽¹⁾ W/ Ω |
|----------------|---------------------------|-------------------------------|---------------------------|--|--|
| CW02B...HE | 1.5 to 2.0 | 5.200 | 21.150 | 7.2700 | 211.3000 |
| | 2.1 to 2.8 | 3.286 | 13.393 | 4.1357 | 134.0286 |
| | 2.9 to 4.0 | 2.000 | 8.200 | 2.2650 | 82.0925 |
| | 4.1 to 5.6 | 1.268 | 5.196 | 1.2857 | 51.8839 |
| | 5.7 to 7.6 | 0.842 | 3.408 | 0.7684 | 34.1000 |
| | 7.7 to 10.8 | 0.519 | 2.111 | 0.4250 | 21.1056 |
| | 10.9 to 15.4 | 0.325 | 1.312 | 0.2351 | 13.0870 |
| | 15.5 to 21.8 | 0.202 | 0.817 | 0.1312 | 8.1839 |
| | 21.9 to 30.5 | 0.121 | 0.521 | 0.0748 | 5.1980 |
| | 30.6 to 41.7 | 0.084 | 0.341 | 0.0444 | 3.4101 |
| CW005...HE | 41.8 to 59.1 | 0.052 | 0.213 | 0.0247 | 2.1289 |
| | 59.2 to 87.5 | 0.031 | 0.125 | 0.0128 | 1.2442 |
| | 5.5 to 7.6 | 5.145 | 20.921 | 1.9026 | 209.2105 |
| | 7.7 to 10.5 | 3.324 | 13.552 | 1.1086 | 135.4800 |
| | 10.6 to 15.1 | 2.040 | 8.311 | 0.6040 | 83.1311 |
| | 15.2 to 21.4 | 1.280 | 5.206 | 0.3369 | 52.0425 |
| | 21.5 to 29.3 | 0.836 | 3.410 | 0.1993 | 34.1003 |
| | 29.4 to 41.8 | 0.519 | 2.110 | 0.1098 | 21.1053 |
| | 41.9 to 59.6 | 0.322 | 1.309 | 0.0607 | 13.0871 |
| | 59.7 to 84.6 | 0.201 | 0.818 | 0.0338 | 8.1840 |
| CW010...HE | 84.7 to 118.6 | 0.120 | 0.519 | 0.0192 | 5.1980 |
| | 118.7 to 162.3 | 0.084 | 0.341 | 0.0114 | 3.4100 |
| | 162.4 to 230.6 | 0.052 | 0.213 | 0.0063 | 2.1290 |
| | 230.7 to 343.6 | 0.031 | 0.125 | 0.0033 | 1.2442 |
| | 15.0 to 20.7 | 5.145 | 20.923 | 0.6986 | 209.2101 |
| | 20.8 to 28.6 | 3.329 | 13.549 | 0.4070 | 135.4773 |
| | 28.7 to 41.0 | 2.037 | 8.312 | 0.2224 | 83.1395 |
| | 41.1 to 58.0 | 1.281 | 5.217 | 0.1243 | 52.1643 |
| | 58.1 to 79.7 | 0.836 | 3.410 | 0.0733 | 34.1003 |
| | 79.8 to 113.6 | 0.518 | 2.111 | 0.0404 | 21.1054 |
| 113.7 to 162.3 | 0.322 | 1.309 | 0.0223 | 13.0871 | |
| 162.4 to 230.5 | 0.201 | 0.818 | 0.0124 | 8.1841 | |
| 230.6 to 323.2 | 0.120 | 0.520 | 0.0071 | 5.1980 | |
| 323.3 to 442.7 | 0.084 | 0.341 | 0.0042 | 3.4100 | |
| 442.8 to 629.3 | 0.052 | 0.213 | 0.0023 | 2.1290 | |
| 629.4 to 938.0 | 0.031 | 0.124 | 0.0012 | 1.2442 | |

Note

⁽¹⁾ Time to fuse is 0.1 s.

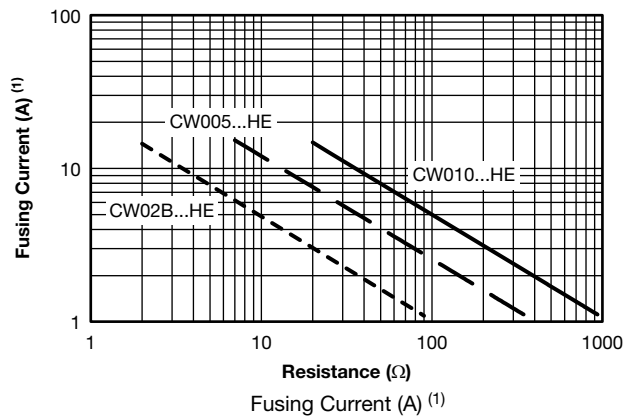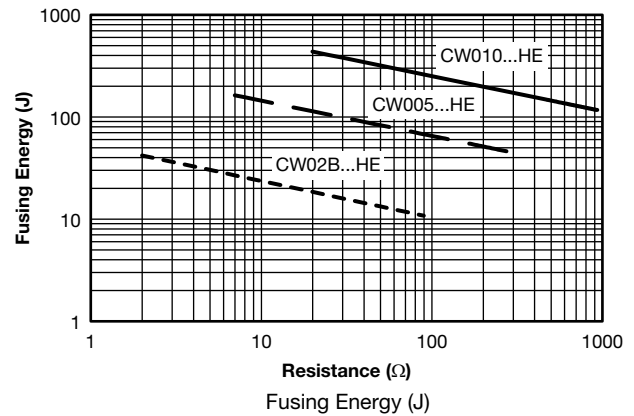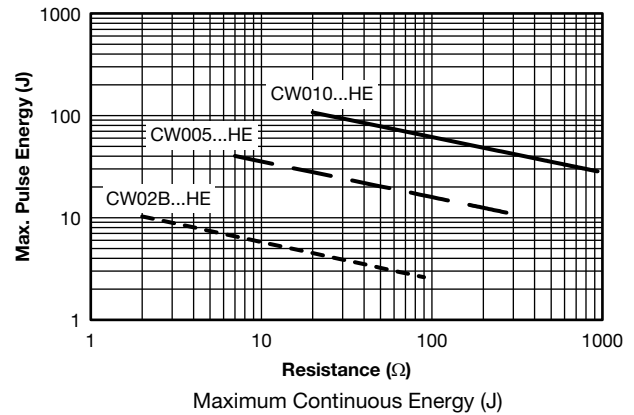



DIMENSIONS in inches (millimeters)

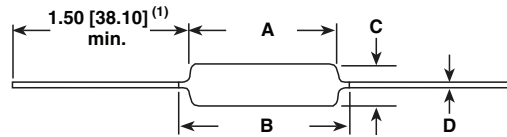


Table with 5 columns: MODEL, DIMENSIONS in inches [millimeters], A, B [MAXIMUM] (2), C, D. Rows include CW02B...HE, CW005...HE, and CW010...HE.

Notes

- (1) On some standard reel pack methods, the leads may be trimmed to a shorter length than shown.
(2) B (maximum) dimension is clean lead to clean lead.

MATERIAL SPECIFICATIONS

- Element: Nickel-chrome alloy
Core: Ceramic: Steatite
Coating: Special high temperature silicone
Standard Terminals: Tinned Copperweld®
End Caps: Stainless steel
Part Marking: DALE, model, wattage (3), value, tolerance, date code

Note

- (3) Wattage marked on resistor will be "V" characteristic.

DERATING

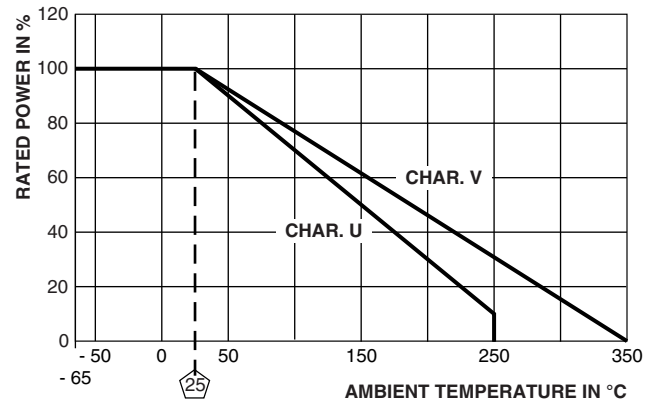


Table with 3 columns: TEST, CONDITIONS OF TEST, TEST LIMITS (4) (CHARACTERISTIC V). Rows include Thermal Shock, Short Time Overload, High Temperature Exposure, and Load Life.

Note

- (4) All ΔR figures shown are maximum, based upon testing requirements per MIL-PRF-26 at a maximum operating temperature of +350 °C. ΔR maximum figures are considerably lower when tested at a maximum operating temperature of +250 °C.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.