


Contact tails pretinned/
Kontaktspitzen verzinkt

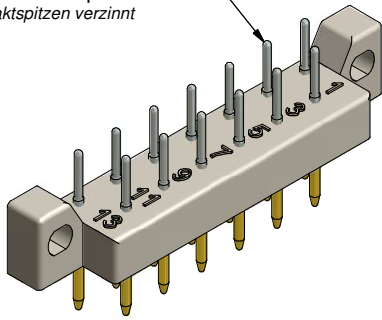

© **Technical specification:**

Technische Daten:

Dielectric withstanding voltage / Spannungsfestigkeit: 1150 V, 50 Hz 1 min.



Current rating / Strombelastbarkeit:
Quality class 1 + 2 / Gütestufe 1 + 2: 4 A max.
Quality class 3 / Gütestufe 3: 2 A max.

Temperature range / Temperaturbereich:
Quality class 1 / Gütestufe 1: -65 °C ... +125 °C
Quality class 2 / Gütestufe 2: -55 °C ... +125 °C
Quality class 3 / Gütestufe 3: -25 °C ... +85 °C

Mating cycles / Steckzyklen:
Quality class 3 = 50 / Gütestufe 3
Quality class 2 = 400 / Gütestufe 2
Quality class 1 = 500 / Gütestufe 1

Materials / Werkstoffe:

Contact / Kontakt: Cu alloy, Au over Ni
Contact tails pretinned / Kontaktspitzen verzinkt
Insulator / Isolierkörper: PC GF UL 94 V-1, grey/grau

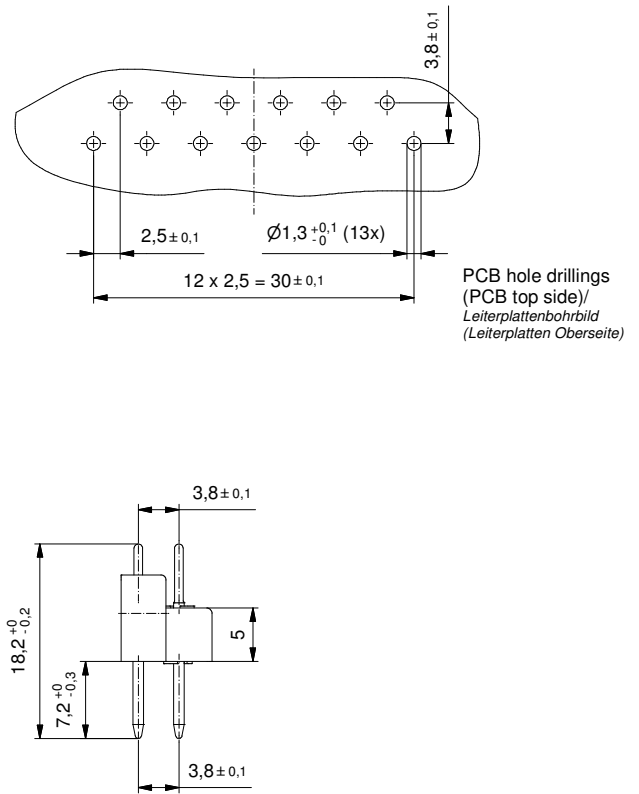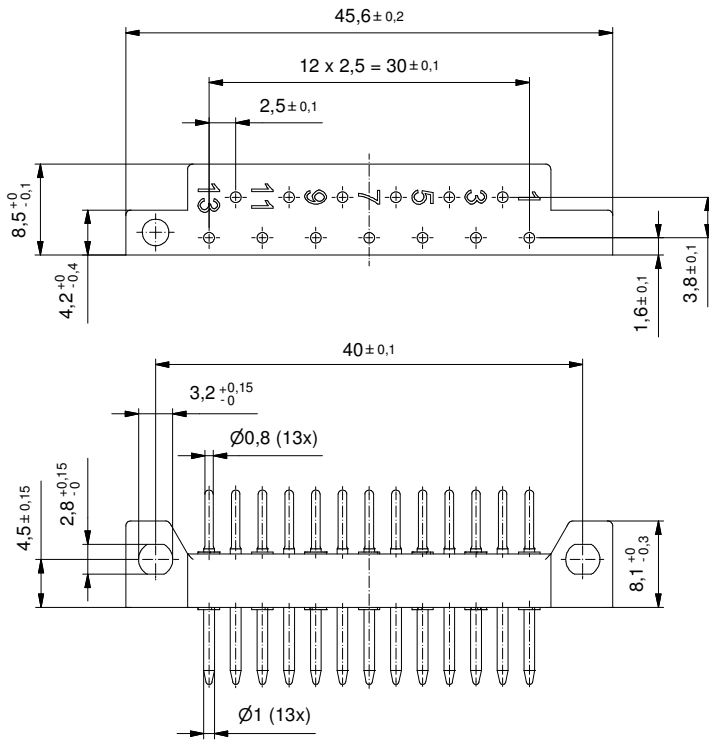

Part no. / Part marked / Art.-Nr. / Bedruckung:	Quality class / Gütestufe:	Contact plating / Kontakt Veredelung:
101A10049X	3	Gold over nickel / 50 mating cycles Gold über Nickel / 50 Steckzyklen
101B10049X	2	Gold over nickel / 400 mating cycles Gold über Nickel / 400 Steckzyklen
101C10049X	1	Gold over nickel / 500 mating cycles Gold über Nickel / 500 Steckzyklen

Index: c Ä6578 14.03.2017 J.L. Status: InBearbeitung RoHS compliant/konform	scale/Maßstab: 2:1		dim. in mm	Male connector 13pos. 0,150 inch / with straight solder pin Messerleiste 13pol. 3,8 mm / mit geradem Lötstift	dwg no / Z.-nr.: 10K1A017	DIN-A3 1 / 1
			Date/Datum: 21.08.08 Name: Sonnenberg drawn/gez.: 21.08.08 appd./gepr.: Mickenbecker			

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. We reserve the right to withdraw advertising and notices, even if they have already been published. Zuerstveröffentlichung ist vorbehalten.