


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:  
INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.  
CONTACT: ANACONDA 7021 OR BOILCAT C97.  
GOLD PLATED.  
SOCKET: BRASS, TIN PLATED.

2. PERFORMANCE:  
MAXIMUM CURRENT: 4 AMPS  
MAXIMUM VOLTAGE: 300 V  
MAXIMUM TEMPERATURE: 122°F (50°C)

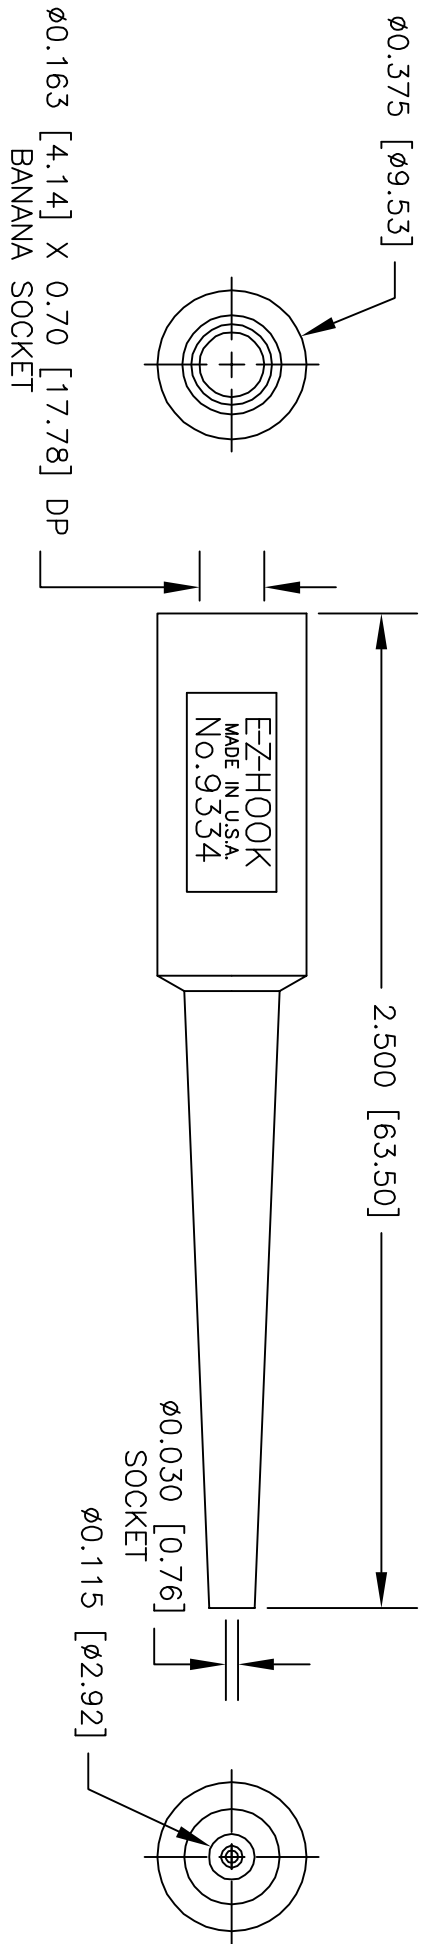

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±

CONTRACT NO.		DESCRIPTION	
APPROVALS	DATE	<b>EZ-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DRAWN	APPROVED BY		
	R.L.	EZ-Z-FLEX BAN SKT TO 0.030 [0.76] SKT ADAPTER (22AWG)	
MATERIAL		SIZE	CODE IDENT NO.
SEE NOTE.		A	08505
FINISH		SCALE	DRAWING NO.
SEE NOTE.		2:1	9334
APPLICATION		REV.	
USED ON		SHEET 1 OF 1	
DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.