



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	D	ADDED -2 PER 0G3A-0018-01	19JAN01	JR ND

SUGGESTED MATING TAB

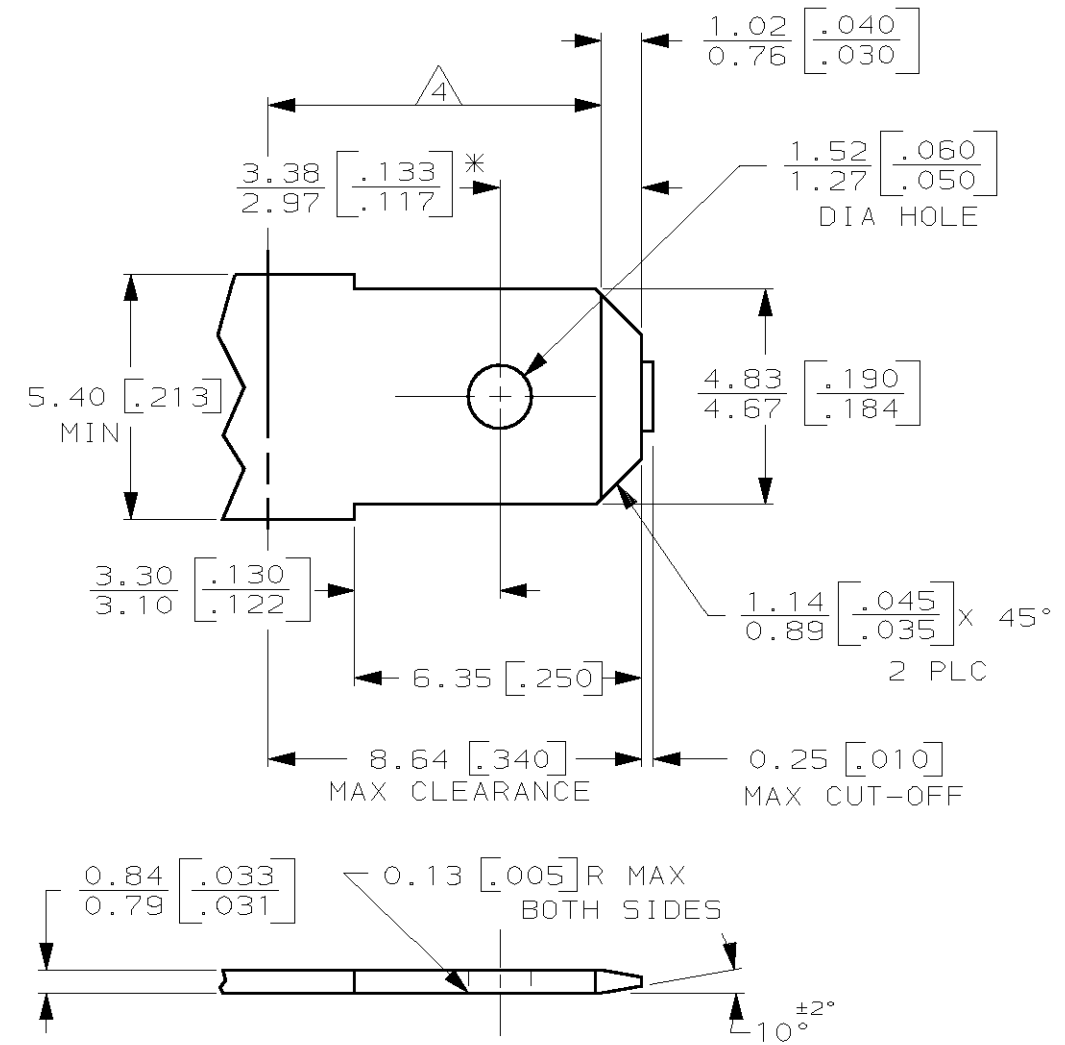

- 1 MATL: #2 HARD BRASS OR NICKEL PLATED STEEL.
- 2 NO BURRS PERMISSIBLE AT HOLE.
- 3 TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERATURE IS OVER 225°F.
- 4 MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
- 5 HOLE MUST BE SYMMETRICAL ABOUT TAB ϕ WITHIN 0.076 [.003].
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

- 1 ACCEPTS CONTACTS FOR 0.81 [.032] THICK TABS ONLY. EXAMPLE, 63498, 173690.
- 2 PRELIMINARY - NOT FOR PRODUCTION

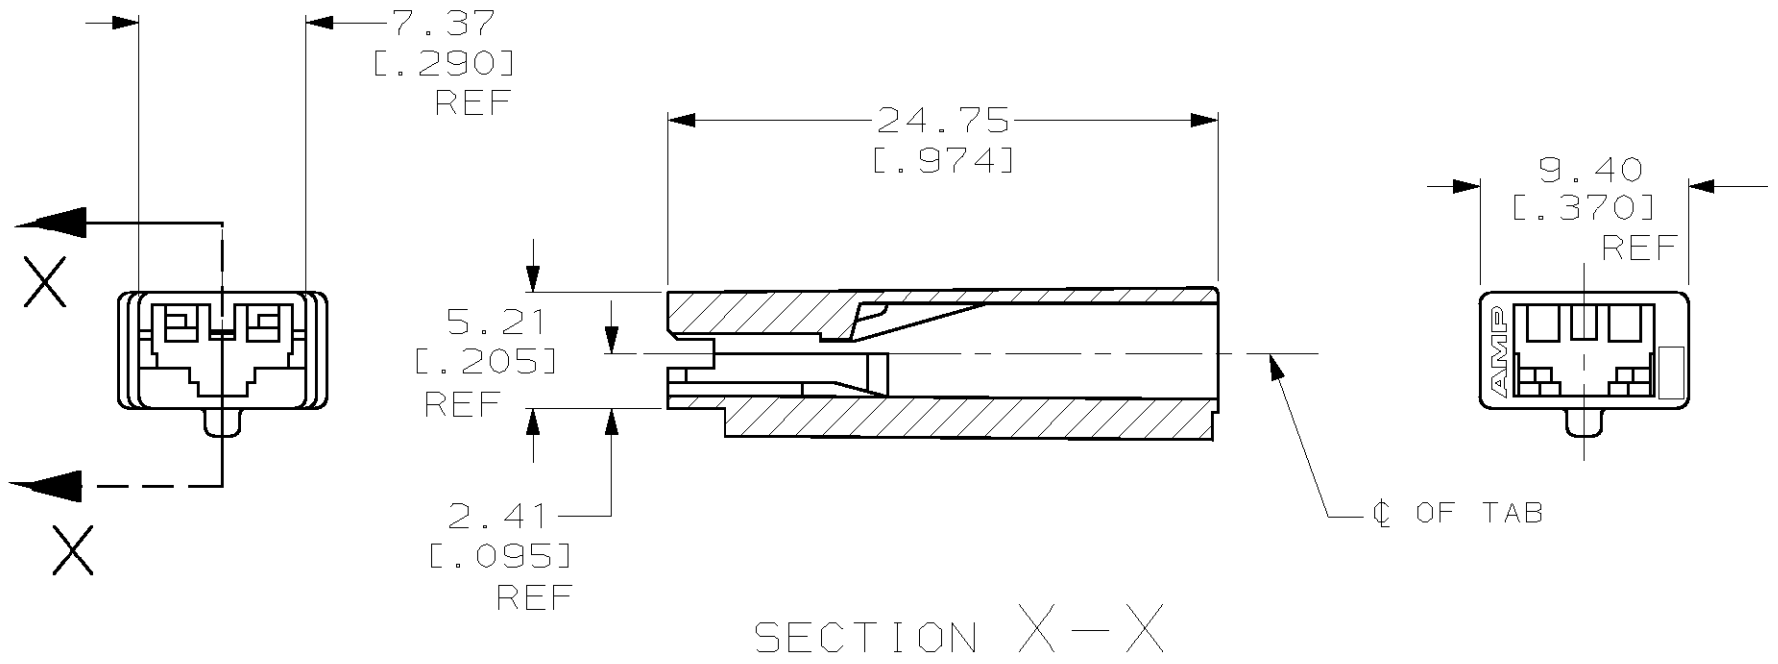

STANYL TW341	521125-2
6/6 NYLON	521125-1
MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	11/15/96	AMP AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: MM [INCHES]		CHK	MS FEHER	11/15/96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J GILLESPIE	11/15/96	NAME
0 PLC ±-		PRODUCT SPEC		HOUSING, POSITIVE-LOCK, 4.75 [.187] SERIES, MK II	
1 PLC ±-		APPLICATION SPEC		SIZE	
2 PLC ±0.25 [.010]		WEIGHT		A3	
3 PLC ±-		CUSTOMER DRAWING		CAGE CODE	
4 PLC ±-		SCALE		00779	
ANGLES ±-		SHEET		1 OF 1	
FINISH NATURAL		REV		D	
MATERIAL SEE TABLE		DRAWING NO		C-521125	