

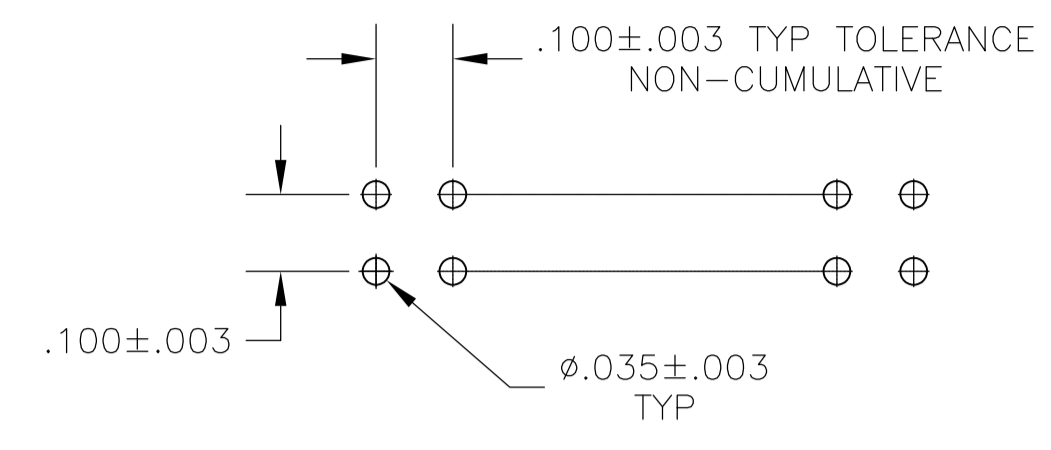
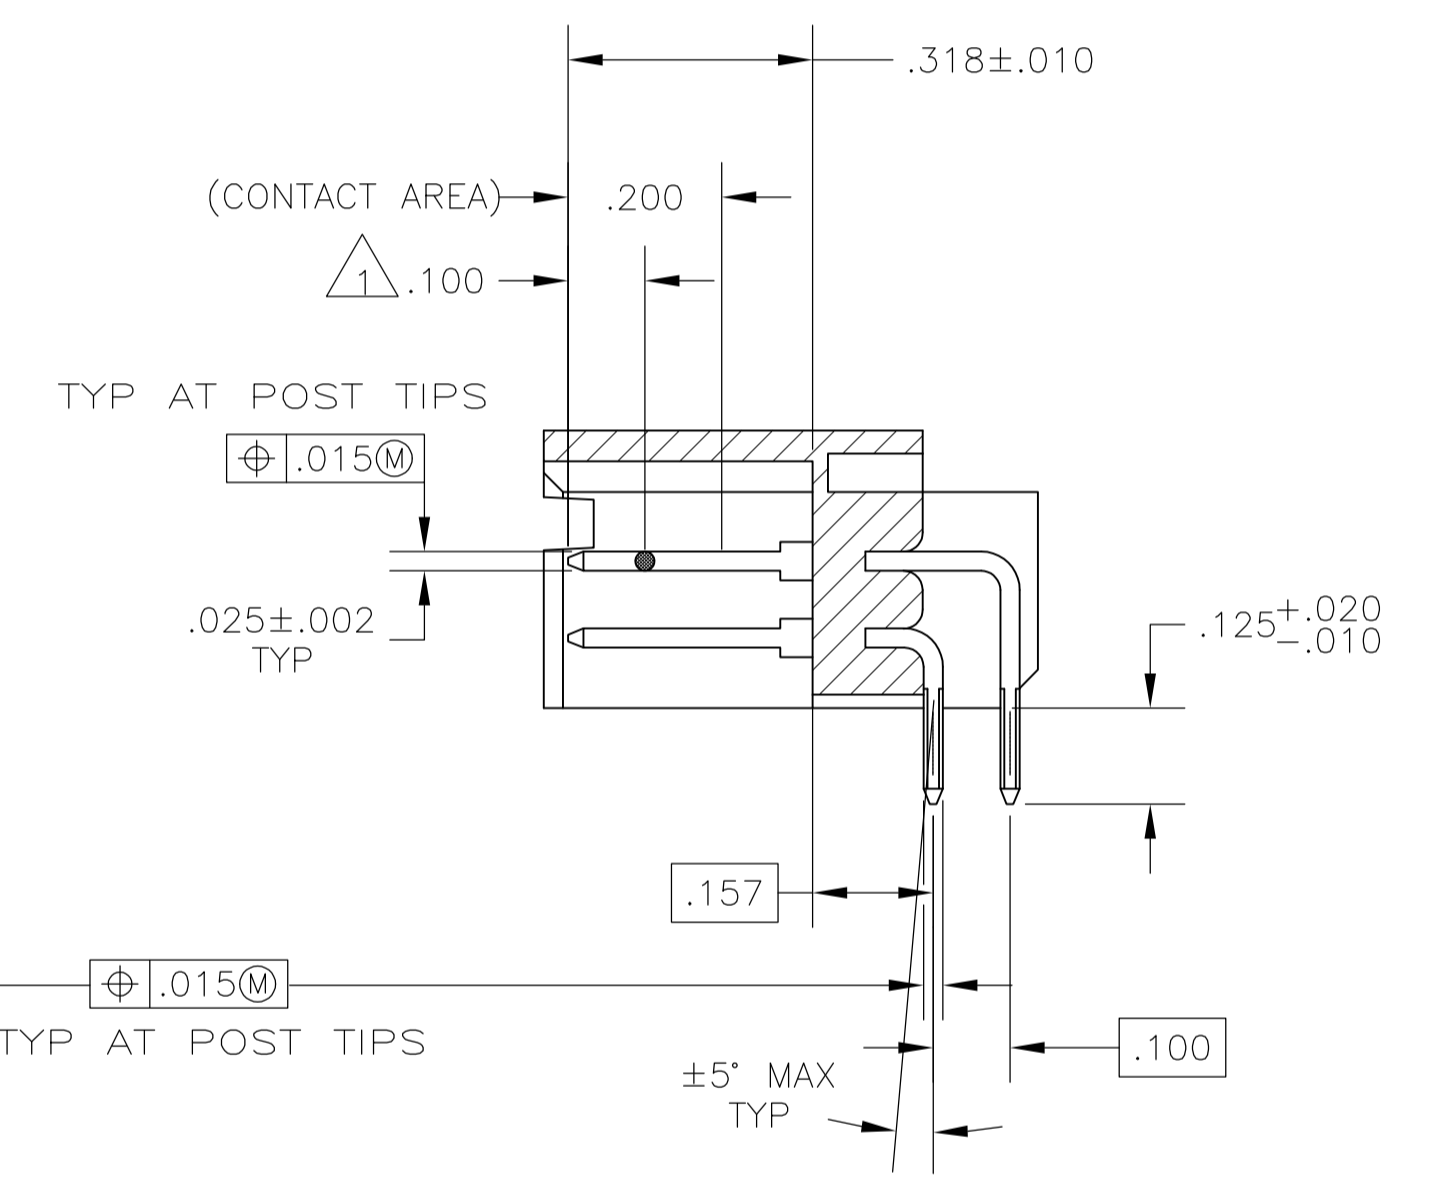


LOC	DIST	REVISIONS				
AD	00	REV	DESCRIPTION	DATE	BY	APPV
		K	EC 0G3C 0209 05	26APR05	BSV	JLG
		K1	REVISED PER ECO-09-020774	24AUG09	KK	AEG

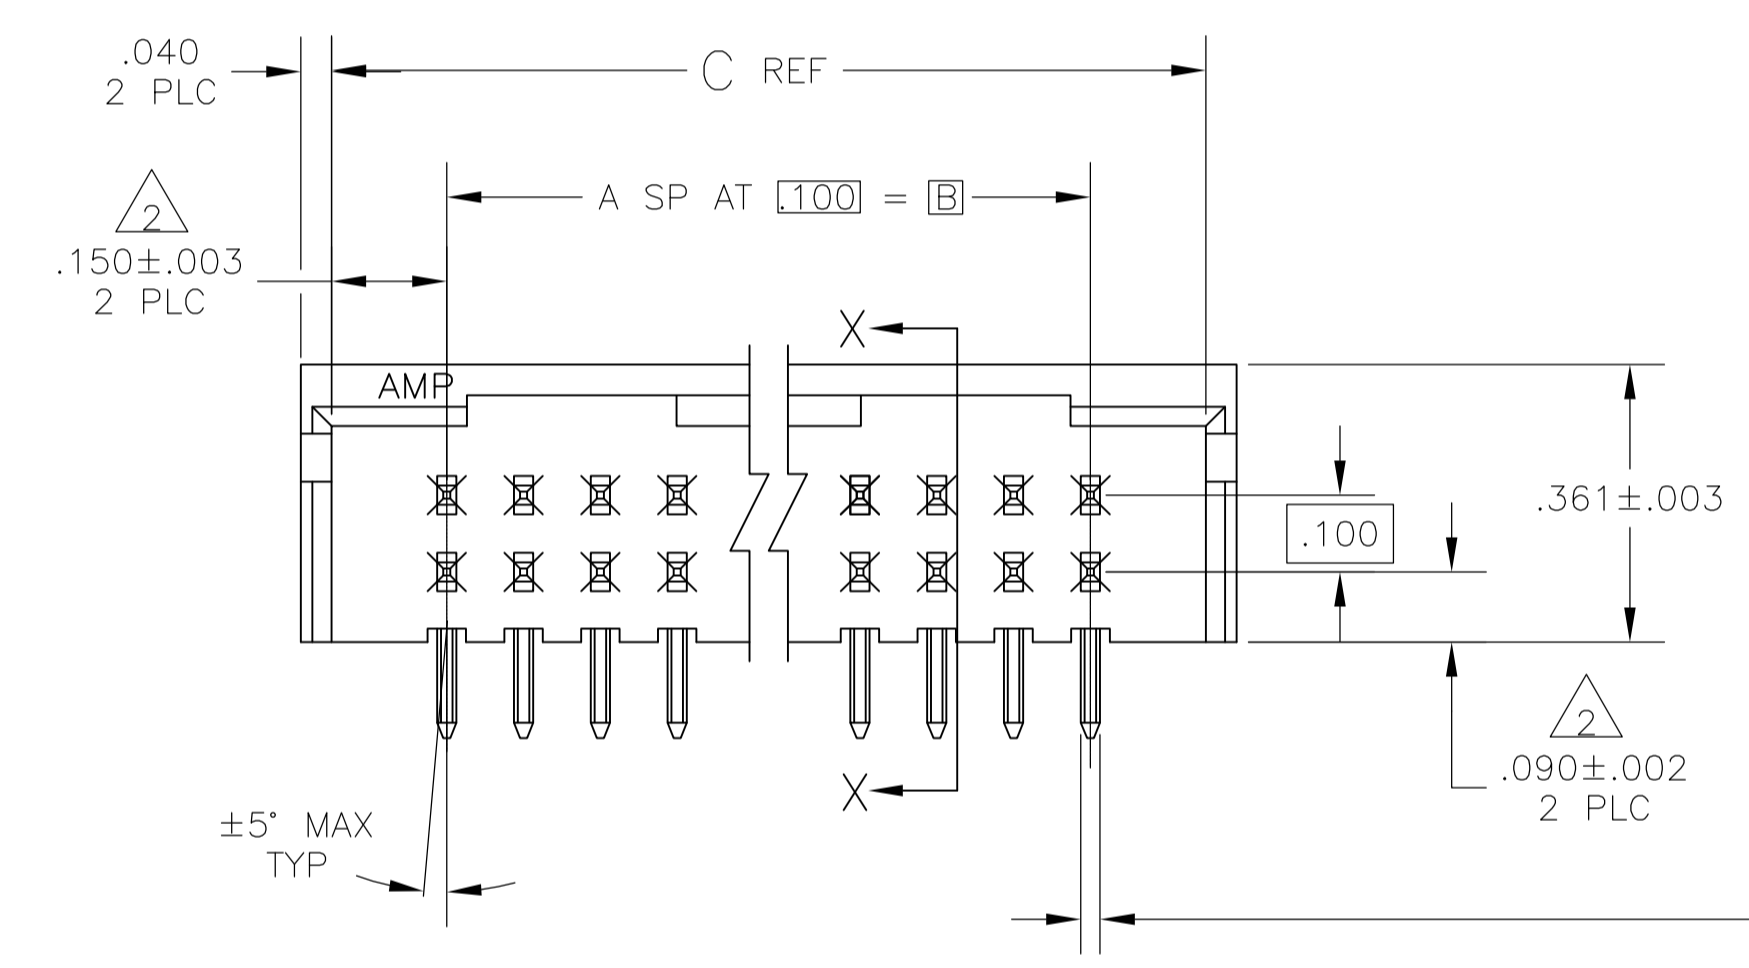

RECOMMENDED HOLE LAYOUT

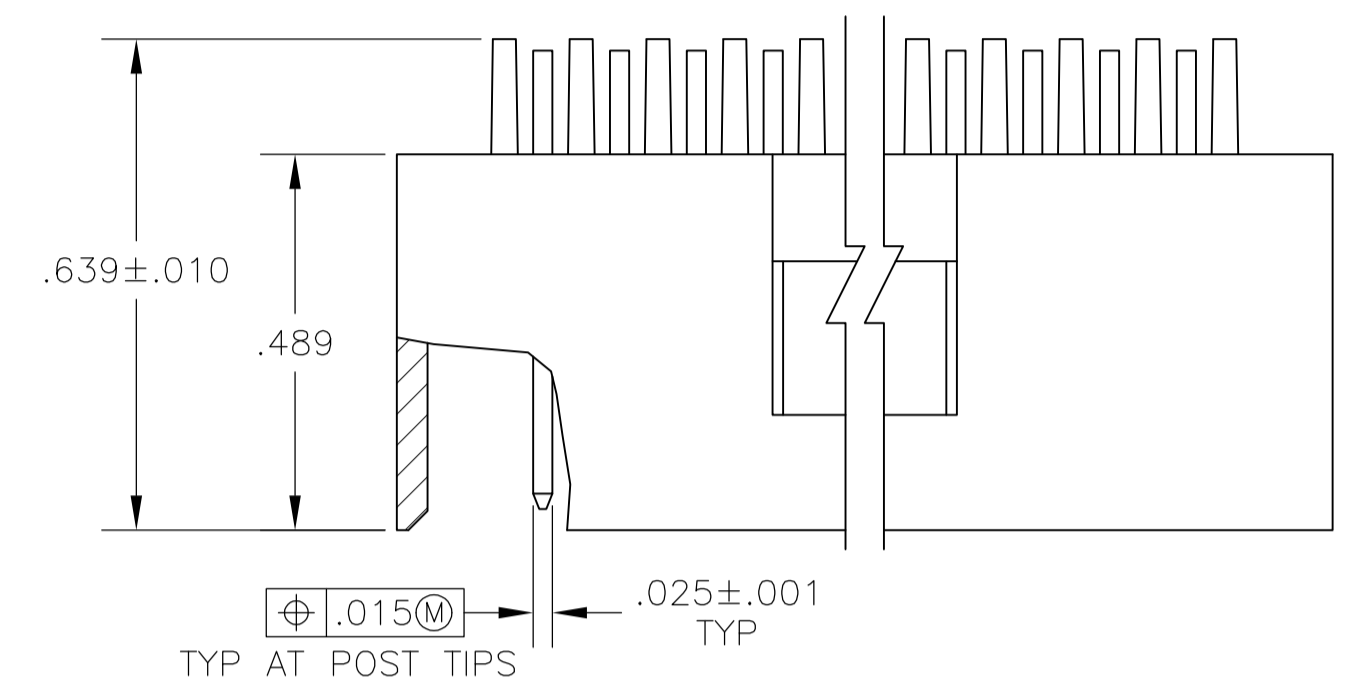

SECTION X-X

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- 3 OBSOLETE PART NUMBER
- 4 POSTS: .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 5 POSTS: .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	DATE	BY	APPV	PART NUMBER	
5		3.200	2.900	29	60	7-102620-6
5		2.700	2.400	24	50	7-102620-1
5		2.200	1.900	19	40	6-102620-6
5		1.900	1.600	16	34	6-102620-3
5		1.700	1.400	14	30	6-102620-1
5		1.500	1.200	12	26	5-102620-9
5		1.400	1.100	11	24	5-102620-8
5		1.200	.900	9	20	5-102620-6
5		1.100	.800	8	18	5-102620-5
5		1.000	.700	7	16	5-102620-4
5		.900	.600	6	14	5-102620-3
5		.800	.500	5	12	5-102620-2
5		.700	.400	4	10	5-102620-1
4		3.800	3.500	35	72	3-102620-2
4		3.700	3.400	34	70	3-102620-1
4		3.600	3.300	33	68	3-102620-0
4		3.500	3.200	32	66	2-102620-9
4		3.400	3.100	31	64	2-102620-8
4		3.300	3.000	30	62	2-102620-7
4		3.200	2.900	29	60	2-102620-6
4		3.100	2.800	28	58	2-102620-5
4		3.000	2.700	27	56	2-102620-4
4		2.900	2.600	26	54	2-102620-3
4		2.800	2.500	25	52	2-102620-2
4		2.700	2.400	24	50	2-102620-1
4		2.600	2.300	23	48	2-102620-0
4		2.500	2.200	22	46	1-102620-9
4		2.400	2.100	21	44	1-102620-8
4		2.300	2.000	20	42	1-102620-7
4		2.200	1.900	19	40	1-102620-6
4		2.100	1.800	18	38	1-102620-5
4		2.000	1.700	17	36	1-102620-4
4		1.900	1.600	16	34	1-102620-3
4		1.800	1.500	15	32	1-102620-2
4		1.700	1.400	14	30	1-102620-1
4		1.600	1.300	13	28	1-102620-0
4		1.500	1.200	12	26	102620-9
4		1.400	1.100	11	24	102620-8
4		1.300	1.000	10	22	102620-7
4		1.200	.900	9	20	102620-6
4		1.100	.800	8	18	102620-5
4		1.000	.700	7	16	102620-4
4		.900	.600	6	14	102620-3
4		.800	.500	5	12	102620-2
4		.700	.400	4	10	102620-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± .005
1 PLC	± .004
2 PLC	± .003
3 PLC	± .002
4 PLC	± .001

ANGLES: ± .5°

MATERIAL: HOUSING: PHOSPHOR BRONZE; POSTS: BRASS

FINISH: SEE TABLE

WEIGHT: —

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 102620

RESTRICTED TO: —

CUSTOMER DRAWING

SCALE: 4:1

SHEET: 1 OF 1

REV: K1

THIS DRAWING IS A CONTROLLED DOCUMENT. BIN: H MOLL 16NOV87. CHK: R FEJDT 17NOV87. NAME: R FLICKER. PRODUCT SPEC: —. APPLICATION SPEC: —. WEIGHT: —. SIZE: A1. CAGE CODE: 00779. DRAWING NO: 102620. RESTRICTED TO: —. CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: K1.