図面番号(DRAWING NO.) SJ101463

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.

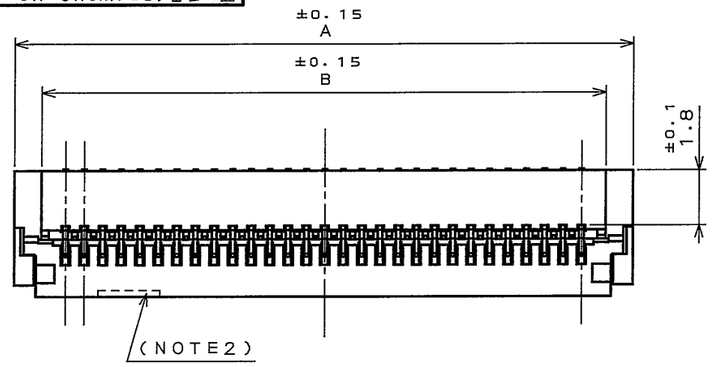

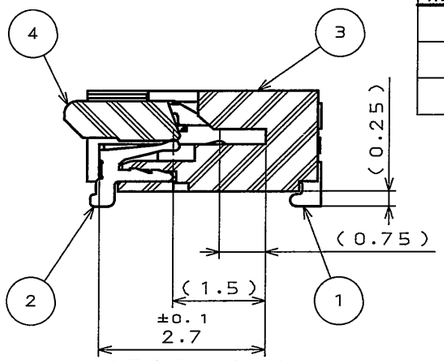

SECT. A−A
(SCALE 10:1)

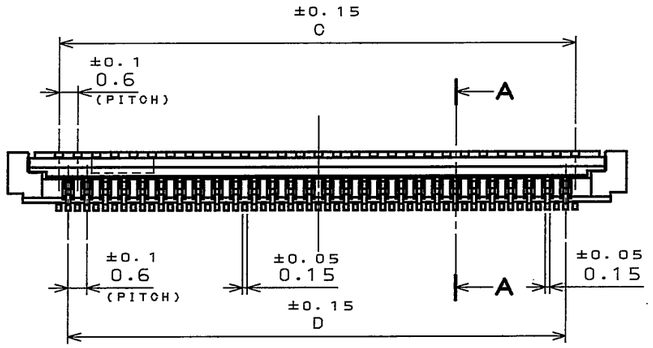



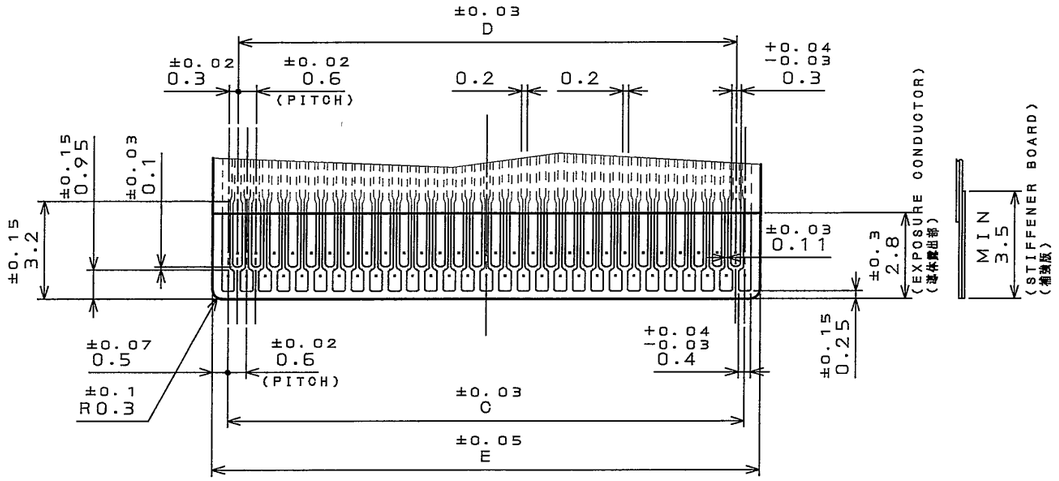

APPLICABLE F.P.C DIMENSION(REF.)
適合FPC寸法(参考)
(THICKNESS:0.2±0.03)

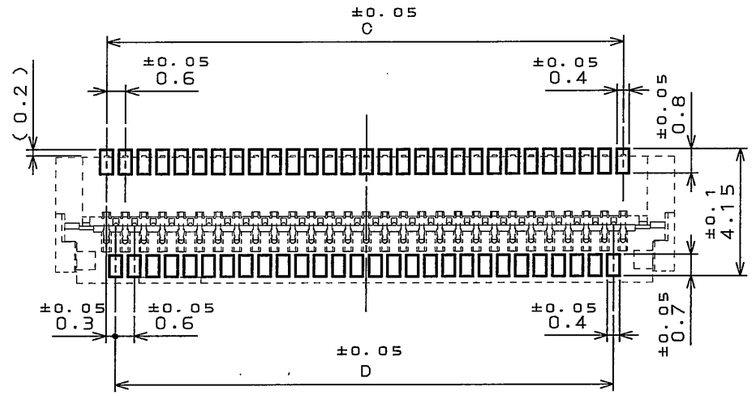

APPLICABLE P.C.B. DIMENSION(REF.)
適合基板寸法(参考)



MATED CONDITION(REF.)
嵌合状態図(参考)

NOTE1.POLYIMIDE SHOULD BE USED AS A STIFFENER BOARD AND THERMOSETTING ADHESIVE SHOULD BE USED.
BARE TRACES SHOULD BE GIVEN GOLD PLATING.

NOTE2.THE ACTUATOR HAS A HOLLOW SOMEWHERE SUCH AS THE DOTTED LINE.

NOTE3.THE CONNECTORS ORDERED INDIVIDUALLY SHALL BE SUPPLIED IN THE CARRIER TAPE.

注1.適合FPCの補強板はポリイミドを使用し、接着剤は熱硬化性を使用すること。
又、仕上げは金メッキのこと。

注2.アクチュエータのどこかに点線で示すような凹形状が付きます。

注3.本コネクタの単品オーダの場合は、キャリアテープに梱包されます。

TABLE 1

NO. OF CONTACT	A	B	C	D	E
39	14.7	12.95	11.4	10.8	12.4
45	16.5	14.75	13.2	12.6	14.2
51	18.3	16.55	15.0	14.4	16.0
57	20.1	18.35	16.8	16.2	17.8
61	21.3	19.55	18.0	17.4	19.0

符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
4	ACTUATOR	1	GLASS FILLED Ny		COLOR:BLACK UL94V-0
3	BASE INSULATOR	1	GLASS FILLED LCP		COLOR:BEIGE UL94V-0
2	CONTACT 2	(n−1)/2	COPPER ALLOY	SELECTIVE GOLD PLATING	
1	CONTACT 1	(n+1)/2	COPPER ALLOY	SELECTIVE GOLD PLATING	

仕様書(SPECIFICATION) JACS-1695 JAHL-1695

第1版(ORIGINAL DATE) 24.Aug.2004

尺度(SCALE) 5:1

シリーズ(SERIES) FB3

名称(TITLE) FB3S***C12

一般公差(GENERAL TOLERANCE)

寸法(DIMENSION)	角度(ANGLES)
. ±0.8	X° ±
.X ±0.4	X°'X'' ±
.XX ±0.1	
.XXX ±	

製図 DR.	
担当 CHK.	N.IKENAGA
査閲 APPD.	—
承認 APPD.	S.Kashiwagi

質量(MASS)

日本航空電子工業株式会社
JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

SIZE A3

図面番号(DRAWING NO.) SJ101463

版数(REV.) 1

JAE-CONNECTOR.COM Reference Only

DOF-0-212E(03.08)

0 10 20 30 40 50 60 70 80 90 100

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2004, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.