

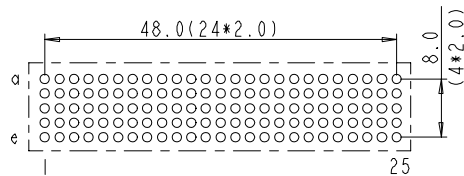



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

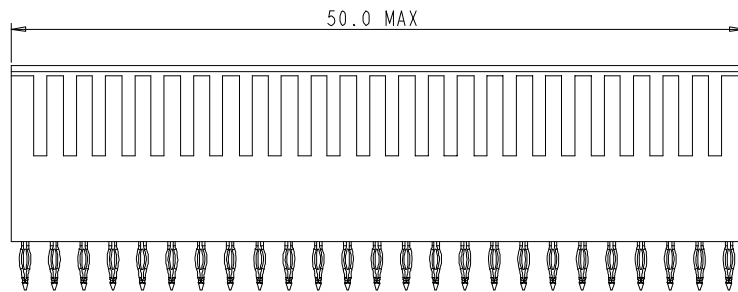

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

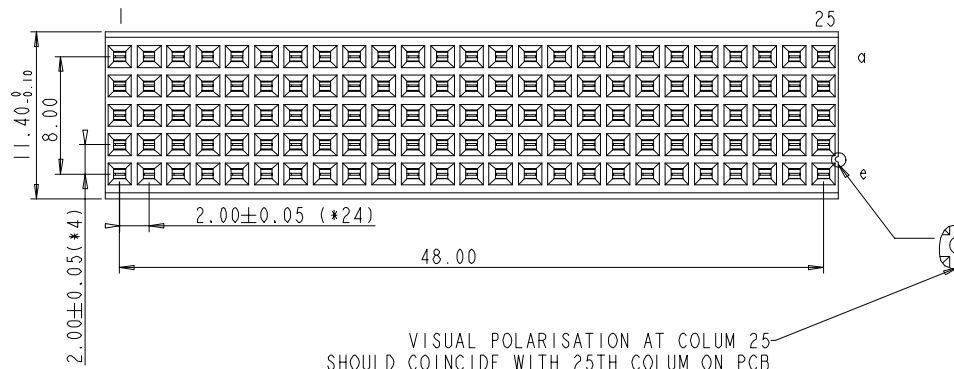

LAY-OUT
P.C.B. - HOLE
(FRONT SIDE)



PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0109	ALEX E	27-11-04
C	DG05-0297	Mason	25-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref		tolerance 1DEC±0.2 1DEC 2DEC±0.1 2DEC ANGLE±1° HOEKEN		projection ⊕		MM ↔	
Mat code		Heatreat		Plating/Finish		size A4		Scale 2.000	
Dr	W.Panis	27-01-95		Product family MILLIPICS		ECN		REL Level	
Eng				Model Name HM2S02PE5100		Model Revision			
Chr				Model Name		Model Revision		REL Level	
Appr				Model Name		Model Revision		REL Level	
FCI		title		MPAS 5R STR RCP SG PF ASSY TYPE B		dwg no		BSC201907002	
Pro/E file		catalog no		HM2S02PE5100----		CUSTOMER DRAWING		sheet 1 of 1	