


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

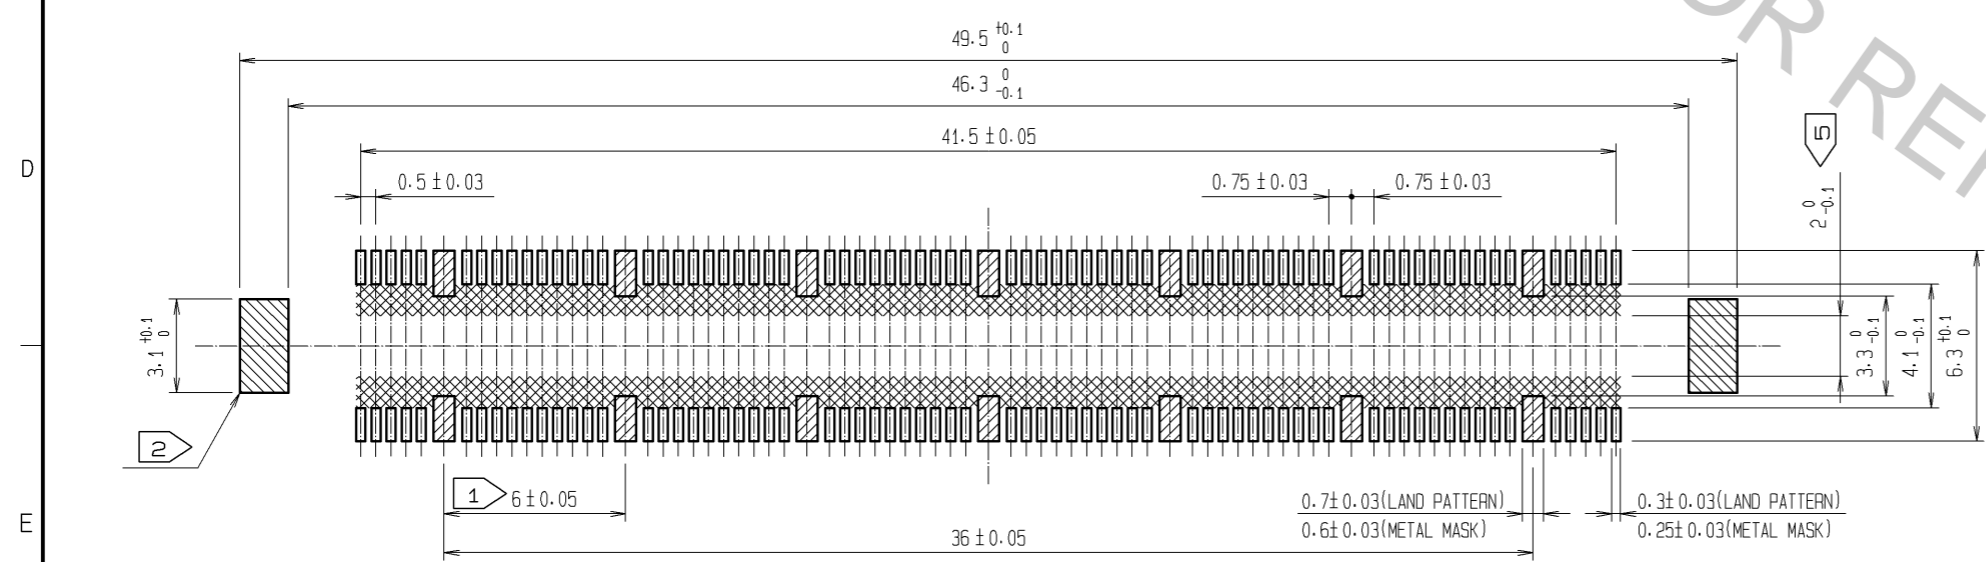

- NOTES
- ① 14 HATCHED PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED PARTS: GROUND CIRCUIT.
 - ③ SMT LEAD-COPLANARITY: 0.1 MAX.
 - ④ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - ⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

| 4 | PHOSPHOR BRONZE | TIN-PLATING | | | | | |
|---------------------------|-----------------|-----------------------|---------------------------------|-----------------|----------|--------------------------|---------|
| 3 | PHOSPHOR BRONZE | TIN-PLATING | CONTACT AREA: GOLD 0.1µm min. | | | | |
| 2 | PHOSPHOR BRONZE | TIN-PLATING | LEAD AREA: TIN-PLATING 1µm min. | | | | |
| 1 | LCP | BEIGE UL94V-0 | UNDER PLATING: NICKEL 1µm min. | | | | |
| NO. | MATERIAL | FINISH | REMARKS | NO. | MATERIAL | FINISH | REMARKS |
| UNITS | | SCALE | | COUNT | | DESCRIPTION OF REVISIONS | |
| mm | | 4 : 1 | | △ | | | |
| APPROVED | | DESIGNED | | CHECKED | | DATE | |
| HS | | HS. OKAWA | | HT. YAMAGUCHI | | 08.06.26 | |
| HIROSE ELECTRIC CO., LTD. | | SY. KAMIGA | | HK. SUNADORI | | 08.06.25 | |
| DRAWING NO. | | PART NO. | | CODE NO. | | DATE | |
| EDC3-151967-25 | | FX10B-140P/14-SV1(71) | | CL570-0124-5-71 | | 1/1 | |