





8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

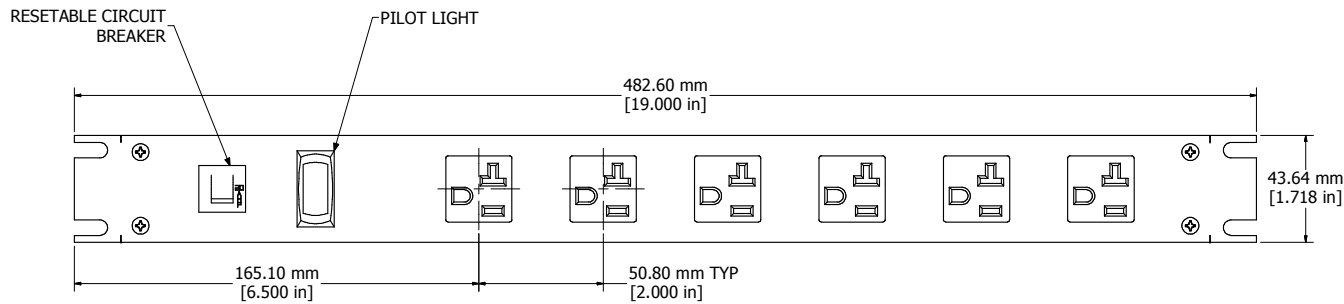



ASSEMBLY - VIEW FROM FRONT

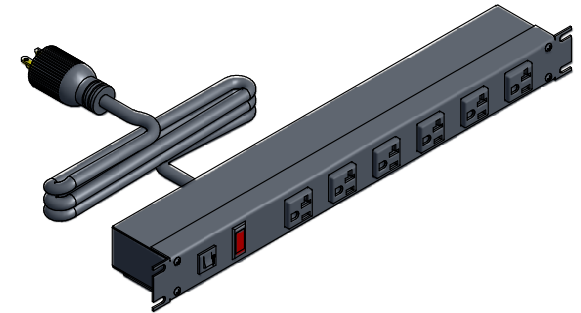

ISOMETRIC VIEW

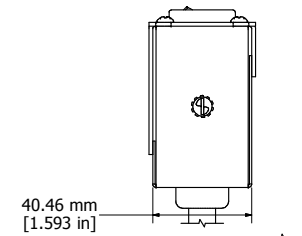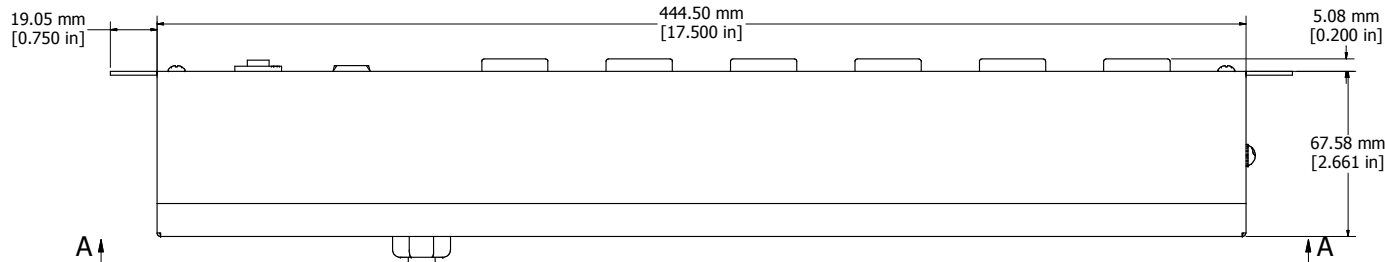

ASSEMBLY - VIEW FROM SIDE

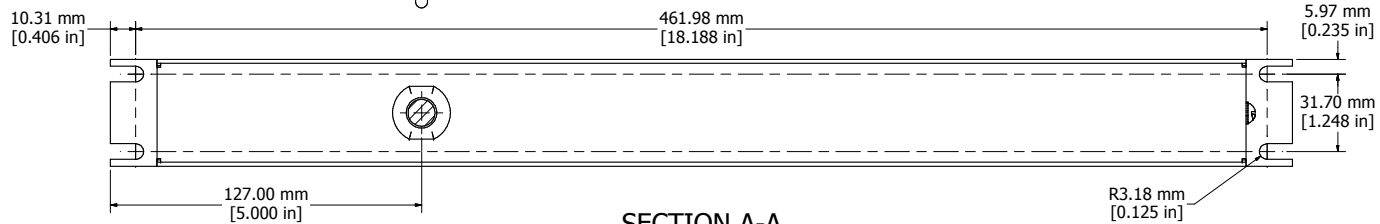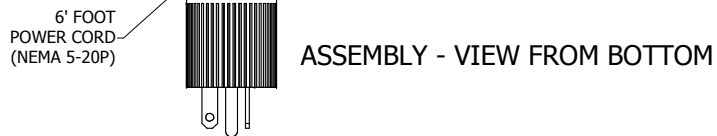

SECTION A-A

| |
|--|
| 1589T6F1BKRF |
| Finish - Front - Black Painted Steel |
| Back - Black Painted Steel |
| Rated - 125 VAC, 60 Hz, 20 Amps |
| Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99) |
| - UL Recognized Standard UL1363 |
| Cord Length |
| 1589T6F1BKRF - 6' Foot Power Cord (NEMA 5-20P) |
| 1589T6G1BKRF - 15' Foot Power Cord (NEMA 5-20P) |

**HAMMOND
MANUFACTURING™**
1589T6F1BKRF
www.hammondmfg.com

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1