


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECR-08-003606	04MAR08	JWD	JD

- 1. MAXIMUM INSERTION LOSS IS 0.2 dB PLUS CABLE ATTENUATION OF 1.5dB/km at 1300nm (SEE TABLE)
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

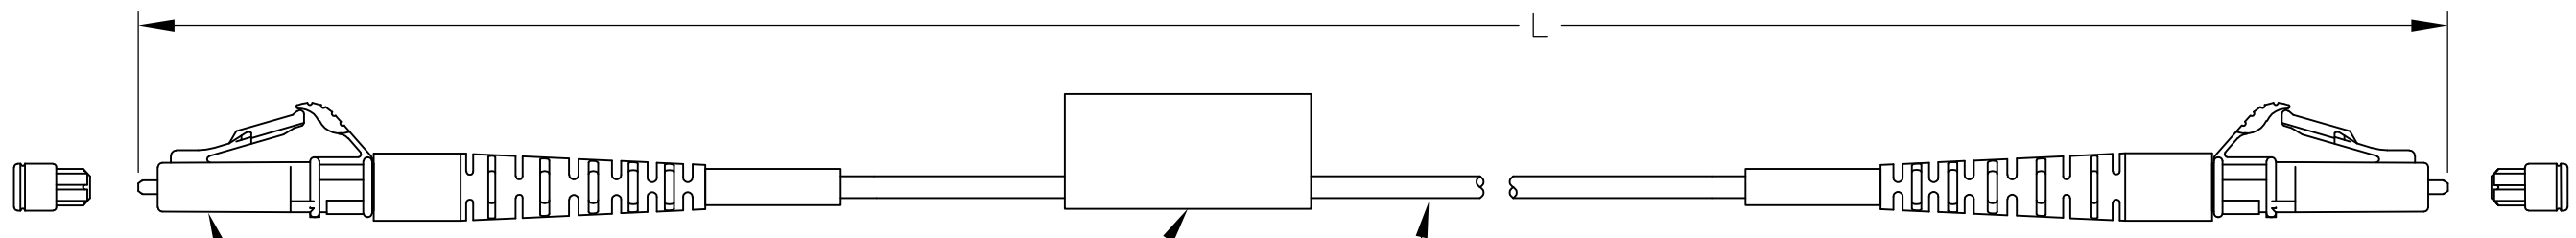

LC CONNECTOR
2 PLACES

TRACE LABEL

CABLE, 62.5/125um,
2.0mm JACKET

0.25	33.00±0.33 [1299.21±12.99]	3-6374109-3
0.24	26.00±0.30 [1023.62±12.0]	2-6374109-6
0.22	10.00±0.15 [393.70±6.0]	1-6374109-0
0.20	1.63±0.05 [64.0±2.0]	6374109-9
0.20	0.476±0.04 [18.8±1.6]	6374109-8
0.20	0.343±0.04 [13.5±1.6]	6374109-7
0.20	1.40±0.05 [55.12±2.00]	6374109-6
0.21	5.00±0.05 [196.85±2.00]	6374109-5
0.21	4.00±0.08 [157.50±3.00]	6374109-4
0.20	3.00±0.05 [118.11±2.00]	6374109-3
0.20	2.00±0.05 [78.74±2.00]	6374109-2
0.20	1.00±0.05 [39.37±2.00]	6374109-1
MAX IL 1 (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 02 SEP 05	Tyco Electronics Corporation Harrisburg Pa, 17105-3608												
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 02 SEP 05	NAME CABLE ASSEMBLY, FIBER OPTIC, 62.5/125um, 2.0mm CABLE, LC TO LC												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 02 SEP 05	PRODUCT SPEC												
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	APPLICATION SPEC	
0 PLC	± -														
1 PLC	± -														
2 PLC	± -														
3 PLC	± -														
4 PLC	± -														
ANGLES	± -														
MATERIAL	FINISH	WEIGHT	SIZE A3	CAGE CODE 00779											
-	-	-	DRAWING NO G-6374109												
CUSTOMER DRAWING			RESTRICTED TO	-											
SCALE NTS		SHEET 1 OF 1		REV B											