

ALUMINUM ELECTROLYTIC CAPACITORS


UBY

High Temperature Range,
For +125°C or 135°C Use



Expanded

- Higher capacitance and higher ripple current than UBT and UBW.
- Ideal for automobile control ciucuits such as electric power steering and direct injection engine drive.
- Compliant to the RoHS directive(2011/65/EU).





■ Specifications

Item	Performance Characteristics												
Category Temperature Range	-40 to +135°C												
Rated Voltage Range	25 to 100V												
Rated Capacitance Range	160 to 12000μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV (μA)												
Tangent of loss angle (tan δ)	Rated voltage (V)	25	35	50	63	80	100						
	tan δ (MAX.)	0.14	0.12	0.10	0.10	0.08	0.08						
	120Hz, 20°C												
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.												
Stability at Low Temperature	Rated voltage (V)	25	35	50	63	80	100						
	Impedance ratio	Z-25°C / Z+20°C	2	2	2	2	2						
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	4	4	4	4	4						
Endurance	Rated voltage (V)	25 to 50V				63 to 100V							
	—	The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 135°C, the peak voltage shall not exceed the rated voltage.				The specifications listed below shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 125°C or 2000 hours at 135°C, the peak voltage shall not exceed the rated voltage.							
	Capacitance change	Within ±30% of the initial capacitance value											
	tan δ	300% or less than tha initial specified value											
	Leakage current	Less than or equal to the initial specified value											
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.												
Marking	Black print on the case top.												

The UBY series places emphasis on high ripple current, as a result the lifetime calculation is different than other series.
Please contact Nichicon for details.


■ Radial Lead Type

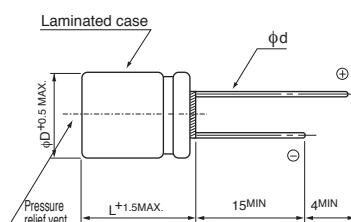

(mm)		
φD	12.5	16
P	5.0	7.5
φd	0.6*	0.8

* In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

Type numbering system (Example : 25V 12000μF)

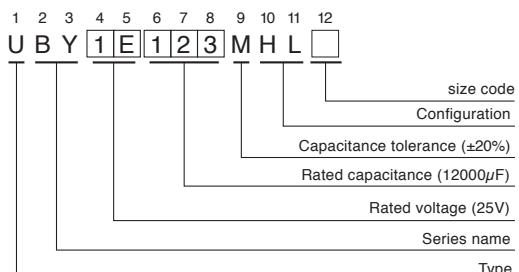

● Dimension table in next page.

Design, Specifications are subject to change without notice.

ALUMINUM ELECTROLYTIC CAPACITORS

UBY

Dimensions

Cap.(μF)	Code	Item	Case size φD × L (mm)	25(1E)				35(1V)				
				ESR (Ω) MAX.		Rated ripple (mA rms)		Case size φD × L (mm)	ESR (Ω) MAX.		Rated ripple (mA rms)	
				20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz		20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz
1300	132							12.5 × 20	0.042	0.48	2760	1690
1800	182							12.5 × 25	0.033	0.30	3480	2010
2000	202	12.5 × 20	0.042	0.48	2760	1690						
2200	222							12.5 × 31.5	0.028	0.24	4490	2900
								▲16 × 20	0.031	0.27	3040	1860
2700	272							12.5 × 35.5	0.025	0.21	5140	3190
								▲18 × 20	0.030	0.22	3250	1870
3000	302	12.5 × 25	0.033	0.30	3480	2010	16 × 25	0.026	0.22	4260	2870	
3300	332	16 × 20	0.031	0.27	3040	1860	12.5 × 40	0.024	0.19	5810	3470	
3600	362	12.5 × 31.5	0.028	0.24	4490	2900						
3900	392							16 × 31.5	0.023	0.18	5480	3400
								▲18 × 25	0.025	0.19	4500	2900
4300	432	18 × 20	0.030	0.22	3250	1870						
4700	472	16 × 25	0.026	0.22	4260	2870	16 × 35.5	0.020	0.14	6070	3630	
5100	512	12.5 × 40	0.024	0.19	5810	3470	18 × 31.5	0.022	0.16	5600	3470	
5600	562							16 × 40	0.019	0.12	6810	3930
6200	622	16 × 31.5	0.023	0.18	5480	3400	18 × 35.5	0.019	0.12	6280	3750	
		▲18 × 25	0.025	0.19	4500	2900						
7500	752	16 × 35.5	0.020	0.14	6070	3630	18 × 40	0.018	0.10	7070	4080	
8200	822	18 × 31.5	0.022	0.16	5600	3470						
9100	912	16 × 40	0.019	0.12	6810	3930						
10000	103	18 × 35.5	0.019	0.12	6280	3750						
12000	123	18 × 40	0.018	0.10	7070	4080						

Cap.(μF)	Code	Item	Case size φD × L (mm)	50(1H)				63(1J)				
				ESR (Ω) MAX.		Rated ripple (mA rms)		Case size φD × L (mm)	ESR (Ω) MAX.		Rated ripple (mA rms)	
				20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz		20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz
390	391							12.5 × 20	0.074	0.56	1640	1420
560	561							12.5 × 25	0.054	0.39	2520	2050
620	621	12.5 × 20	0.056	0.88	2400	1470						
750	751							12.5 × 31.5	0.042	0.30	3110	2630
								▲16 × 20	0.053	0.34	2140	1910
820	821	12.5 × 25	0.044	0.67	3350	2260						
950	951							12.5 × 35.5	0.038	0.25	3760	2970
								▲18 × 20	0.048	0.26	2350	2100
1000	102	16 × 20	0.039	0.55	2960	1870	16 × 25	0.038	0.23	2940	2680	
1100	112	12.5 × 31.5	0.037	0.52	4220	2520	12.5 × 40	0.031	0.22	4610	3260	
		12.5 × 35.5	0.033	0.44	4810	2780	16 × 31.5	0.034	0.20	3860	3050	
1300	132	▲16 × 25	0.033	0.44	4040	2500	▲18 × 25	0.035	0.19	3080	2810	
		※18 × 20	0.038	0.44	3130	2110						
1600	162	12.5 × 40	0.032	0.36	5240	3020						
1700	172							16 × 35.5	0.027	0.15	4590	3420
1800	182	16 × 31.5	0.029	0.36	5130	2960	18 × 31.5	0.028	0.15	4080	3220	
		▲18 × 25	0.032	0.32	4230	2530						
2000	202							16 × 40	0.025	0.14	5190	3670
2200	222	16 × 35.5	0.025	0.27	5480	3160	18 × 35.5	0.023	0.12	5220	3690	
2400	242	18 × 31.5	0.028	0.25	5240	3020						
2500	252							18 × 40	0.021	0.11	5660	3820
2700	272	16 × 40	0.024	0.22	5930	3420						
3000	302	18 × 35.5	0.024	0.20	5870	3390						
3600	362	18 × 40	0.023	0.16	6420	3700						

▲: In this case, [6] will be put at 12th digit of type numbering system.

※: In this case, [3] will be put at 12th digit of type numbering system.

Design, Specifications are subject to change without notice.

ALUMINUM ELECTROLYTIC CAPACITORS

UBY

■ Dimensions

Cap.(μ F)	Code	Item	V (Code)	80 (1K)				100 (2A)			
				Case size $\phi D \times L$ (mm)	ESR (Ω) MAX.		Rated ripple (mAmps)		Case size $\phi D \times L$ (mm)	ESR (Ω) MAX.	
					20°C /100kHz	-40°C /100kHz	125°C /100kHz	135°C /100kHz		20°C /100kHz	-40°C /100kHz
160	161								12.5 × 20	0.074	0.56
220	221								12.5 × 25	0.054	0.39
270	271	12.5 × 20	0.074	0.56	1640	1420	16 × 20	0.053	0.34	2140	1910
300	301								12.5 × 31.5	0.042	0.30
360	361								12.5 × 35.5	0.038	0.25
390	391	12.5 × 25	0.054	0.39	2520	2050	▲18 × 20	0.048	0.26	2350	2100
430	431								12.5 × 40	0.031	0.22
470	471	16 × 20	0.053	0.34	2140	1910	16 × 31.5	0.034	0.20	3860	3050
510	511	12.5 × 31.5	0.042	0.30	3110	2630	18 × 25	0.035	0.19	3080	2810
560	561								16 × 35.5	0.027	0.15
620	621	12.5 × 35.5	0.038	0.25	3760	2970					
		▲18 × 20	0.048	0.26	2350	2100					
680	681	16 × 25	0.038	0.23	2940	2680	18 × 31.5	0.028	0.15	4080	3220
750	751	12.5 × 40	0.031	0.22	4610	3260	16 × 40	0.025	0.14	5190	3670
820	821	16 × 31.5	0.034	0.20	3860	3050	18 × 35.5	0.023	0.12	5220	3690
		▲18 × 25	0.035	0.19	3080	2810					
950	951						18 × 40	0.021	0.11	5660	3820
1000	102	16 × 35.5	0.027	0.15	4590	3420					
1100	112	18 × 31.5	0.028	0.15	4080	3220					
1300	132	16 × 40	0.025	0.14	5190	3670					
		▲18 × 35.5	0.023	0.12	5220	3690					
1600	162	18 × 40	0.021	0.11	5660	3820					

▲: In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Cap. (μ F)	Frequency	120Hz	1kHz	10kHz	100kHz or more
		0.40	0.75	0.90	1.00
160		0.50	0.85	0.94	1.00
220 to 620		0.60	0.87	0.95	1.00
680 to 2000		0.75	0.90	0.95	1.00
2200 to 4300		0.85	0.95	0.98	1.00
4700 to 12000					

Design, Specifications are subject to change without notice.