

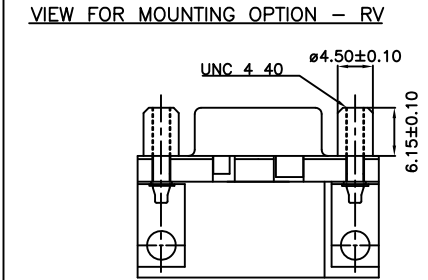
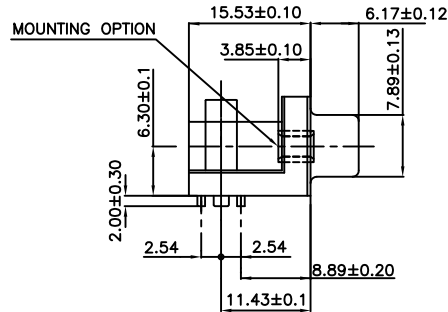
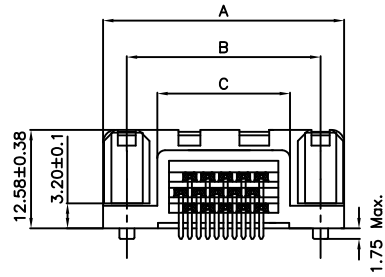


SIZE	DIMENSIONS						
	A±0.38	B±0.12	C±0.10	D ^{+0.25} ₋₀	E	F	G
14/15	30.81	24.99	16.96	16.21	8.19	2.28	1.14
26	39.14	33.32	25.18	24.54	8.01	2.285	1.14
44	53.03	47.04	39.12	38.25	8.02	2.285	1.14

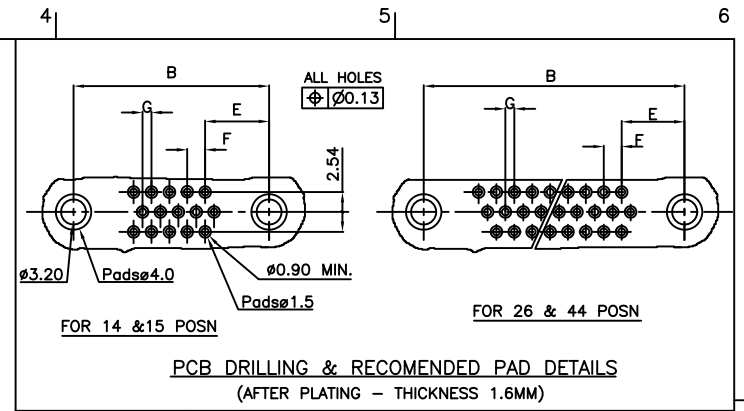

ORDERING INFORMATION

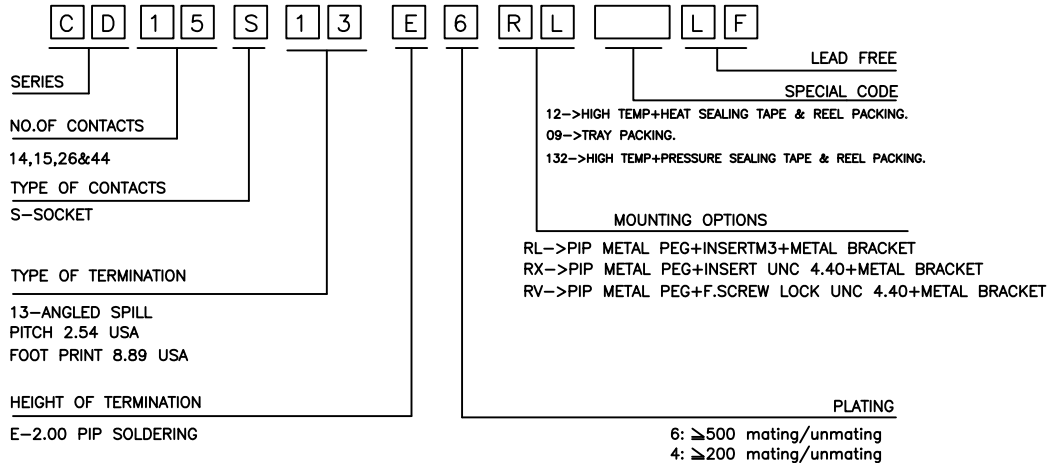

"This product meets European Union Directives and other country regulations as described in GS-47-0004"

The housing will withstand exposure to 260°C peak temperature for 30 seconds in a convection, infra-red or vapor reflow oven solder application.

Packaging as per GS-14-920

TRUE POSITION : $\phi 0.36$

PRODUCT SPECIFICATION

See :- GS-12-607

PACKAGING SPECIFICATION

See :- GS-14-1139 - Tape & Reel Packing
See :- GS-14-1157 - Tray Packing

- NOTES :
- GENERAL VIEW IS FOR MOUNTING OPTION - RX/RL
 - FOR 14 POSN , HOLE NO:9 IS BLOCKED

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family COMPACT D	
tr		ecn no		dr		date		title	
A		107-0166		AS		2007-12-4		C-D A/S FEMALE PIP CONNECTOR	
B		109-0130		AS		2009-7-8			
C		109-0202		NG		2009-9-24			
D		111-0052		RPK		2011-3-17		scale -	
E		ELX-121007		AB		2015/06/03		dwg no sheet 1 of 1 size	
								A3	
								type Product Customer Drawing	
sheet index		revision sheet		E		1			