
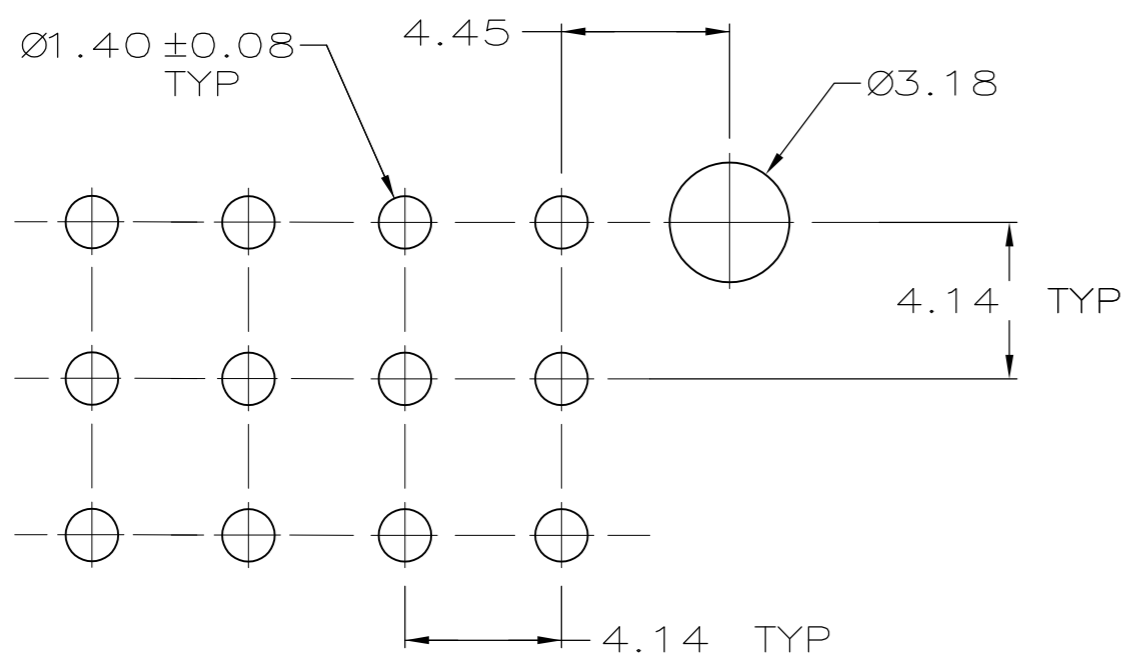
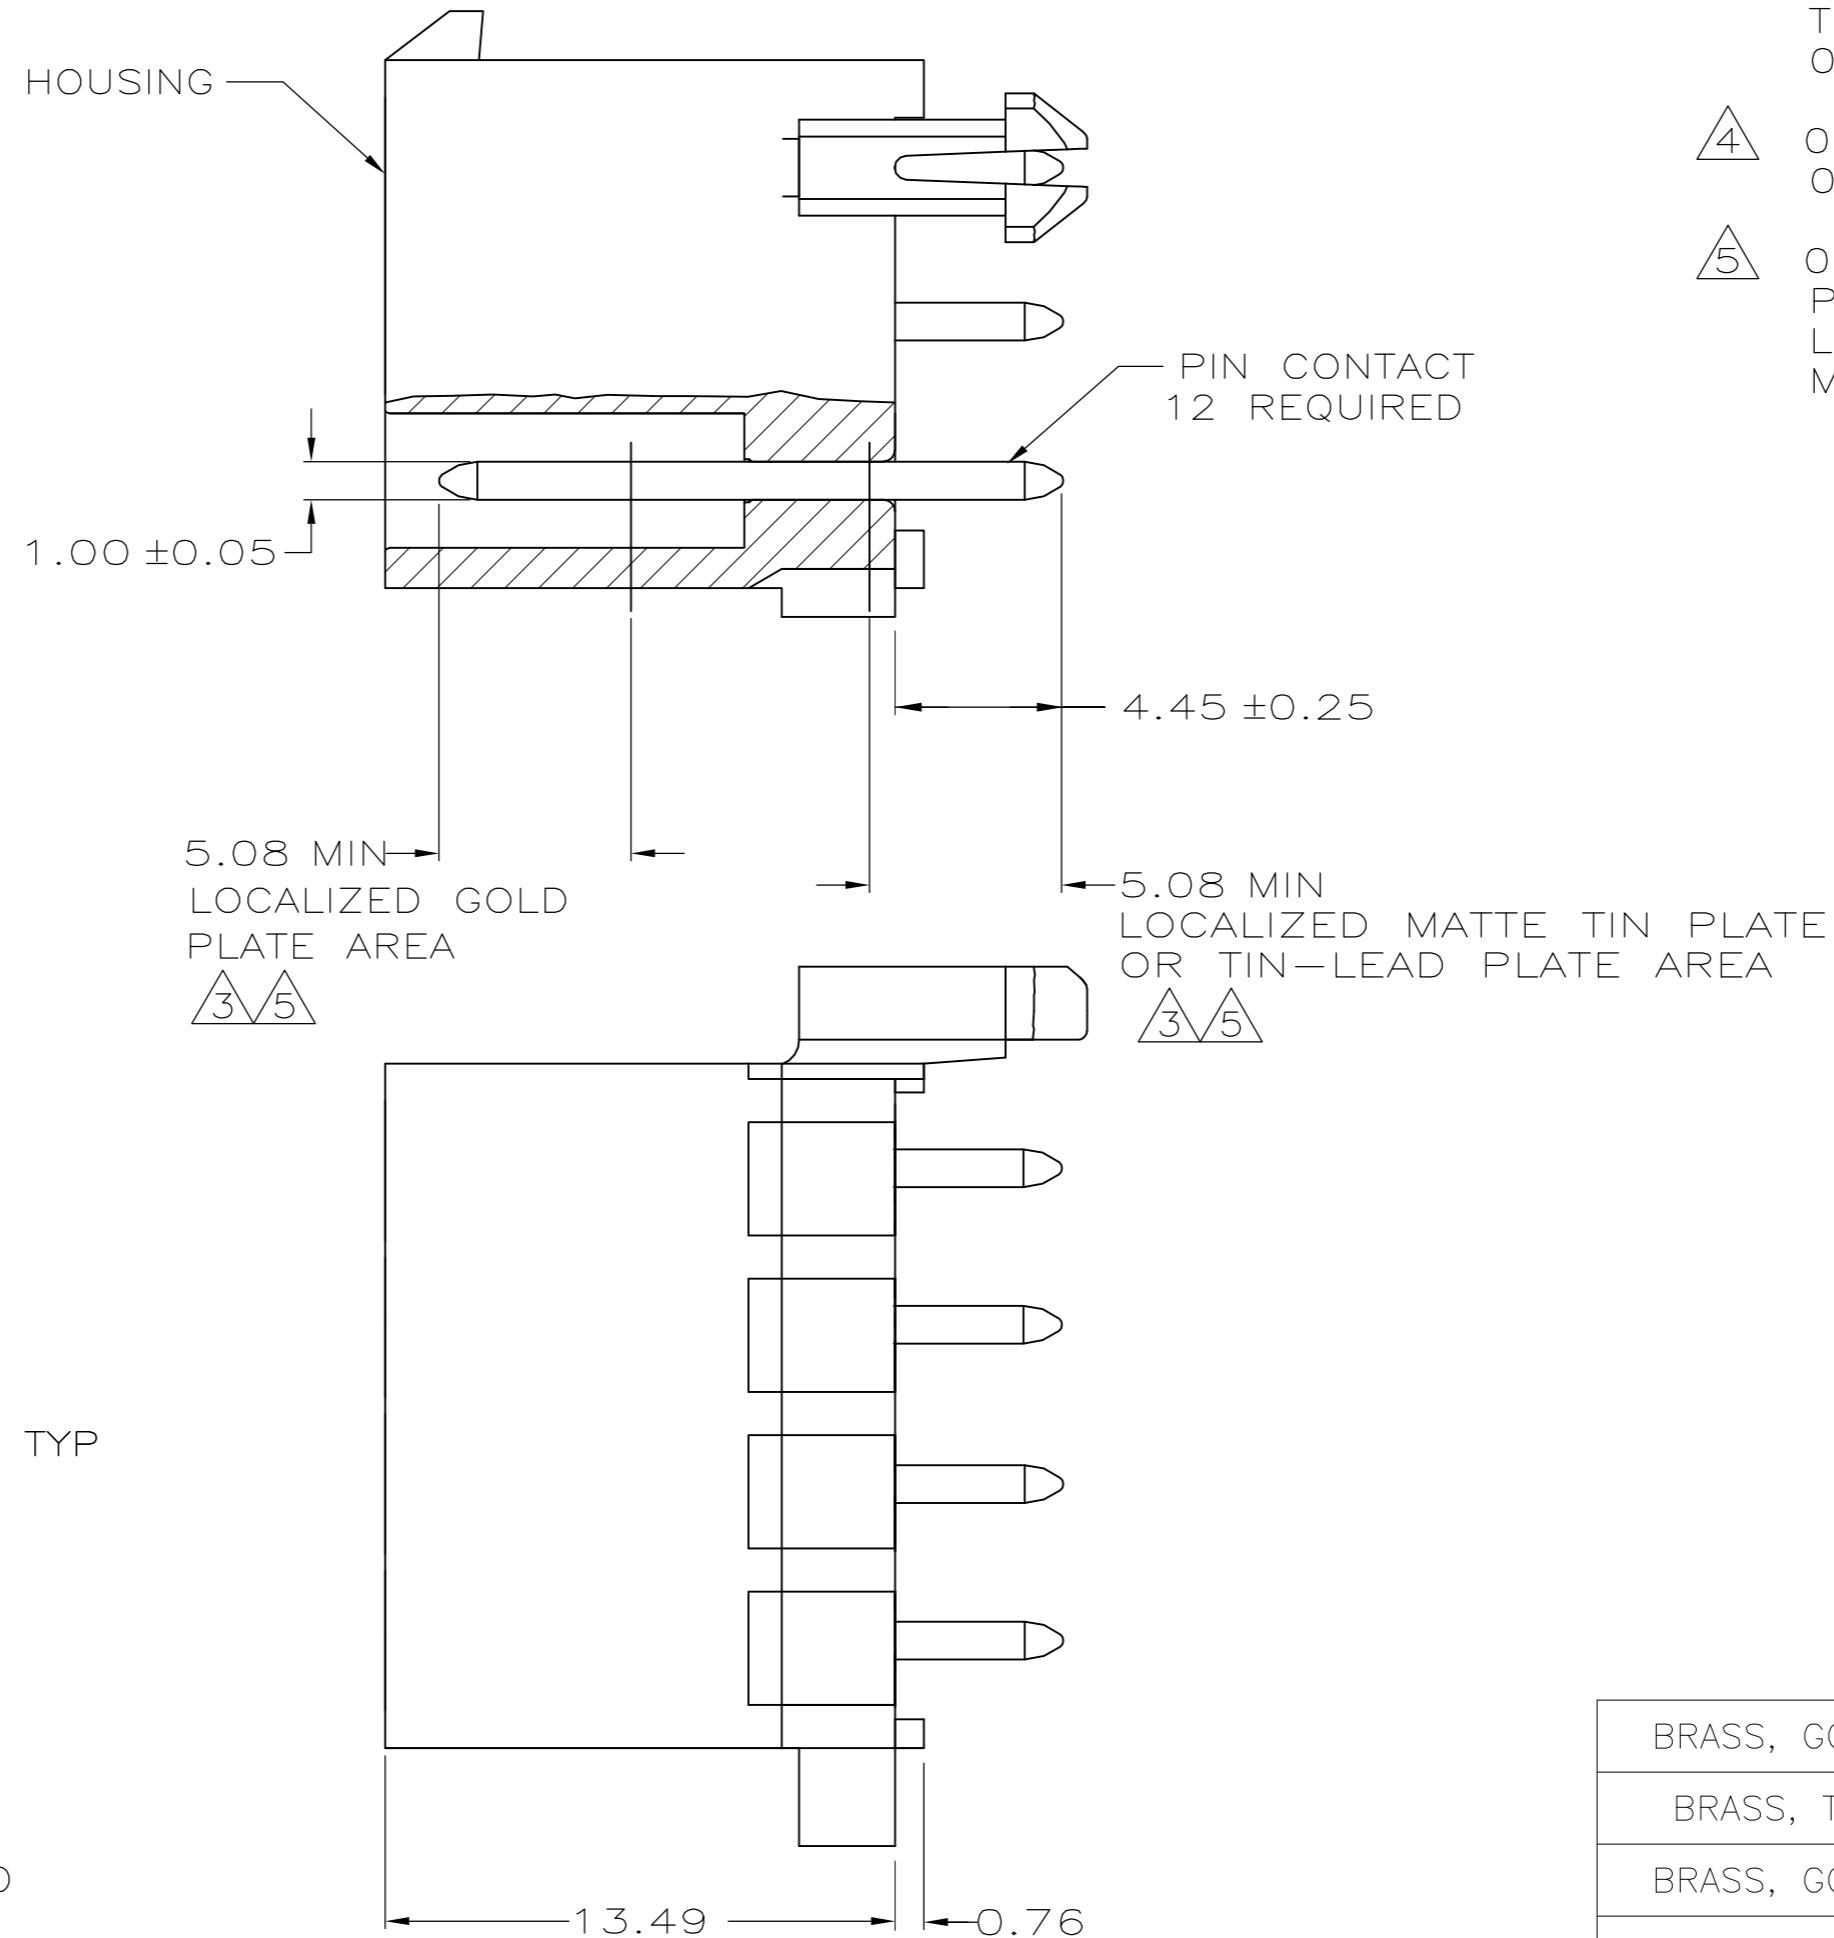


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	0	L1	REVISED PER ECO-11-004917	11MAR11	RK	HMR	

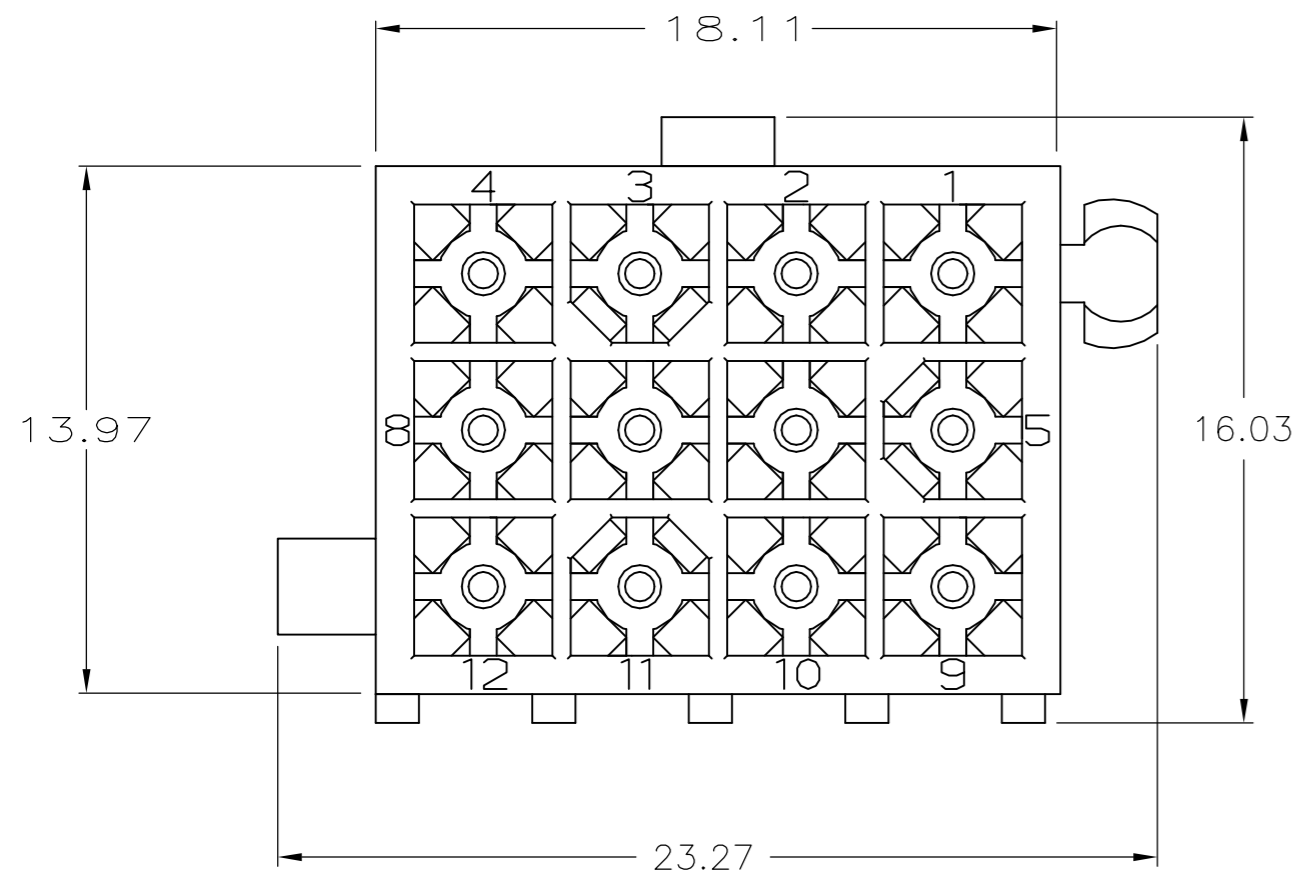

RECOMMENDED LAYOUT FOR 1.57 THICK BOARD  
 TOLERANCES NON-ACCUMULATIVE

- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-770186-1
BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-770186-0
BRASS, GOLD	3	NYLON, UL94V-0	WHITE	770186-2
BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	770186-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08JUN05	TE Connectivity	
DIMENSIONS: mm		CHK	S CARPENTER	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R JONES	HEADER ASSEMBLY, 12 CKT, MINI UNIVERSAL MATE-N-LOK	
0 PLC ± -		PRODUCT SPEC	R JONES	SIZE	CAGE CODE
1 PLC ± -		APPLICATION SPEC	28JUL2003	A2	00779
2 PLC ± 0.13		WEIGHT	28JUL2003	SCALE	DRAWING NO
3 PLC ± -		FINISH	PRODUCT SPEC	5:1	C=770186
4 PLC ± -		MATERIAL	APPLICATION SPEC	SHEET	1 OF 1
ANGLES ± -		CUSTOMER DRAWING	RESTRICTED TO	REV	L1