

5

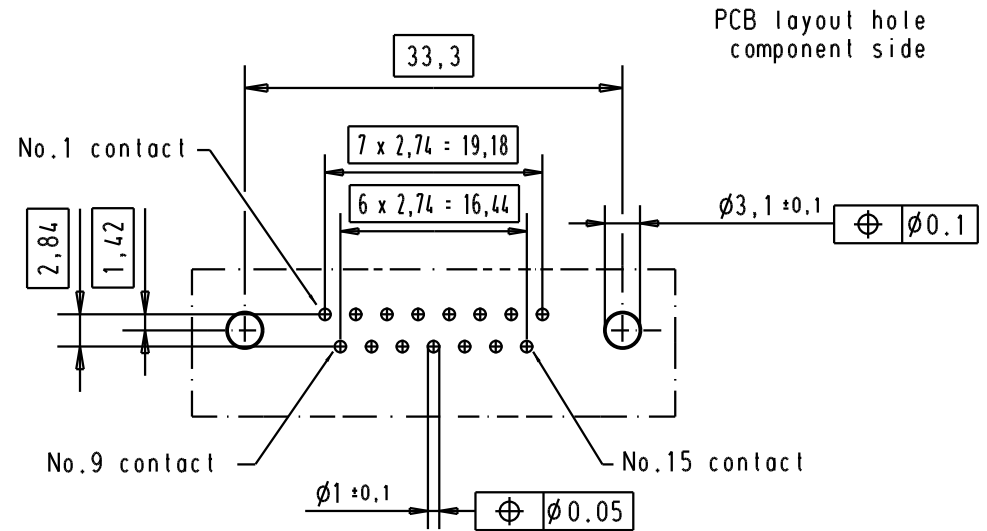
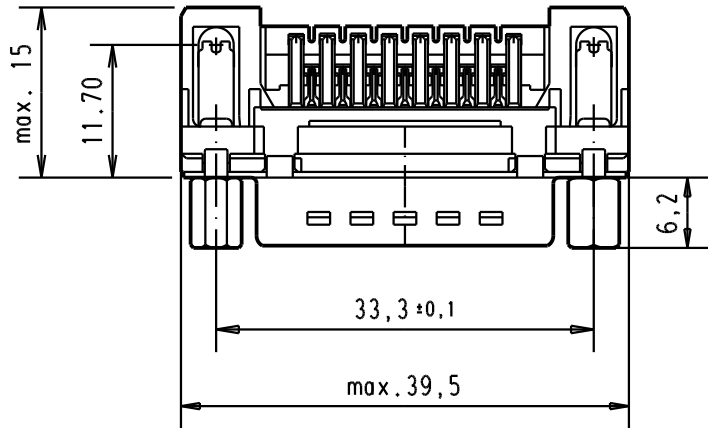
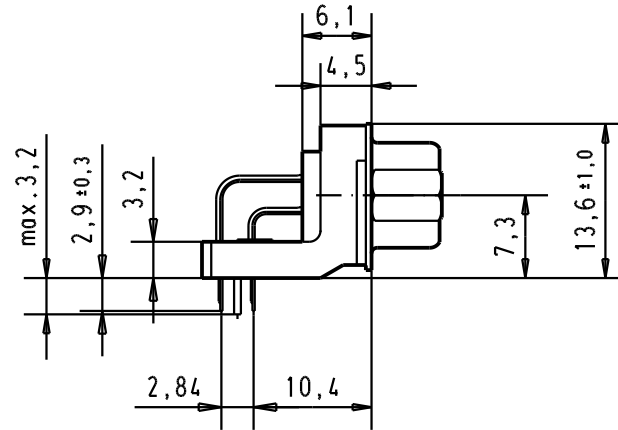
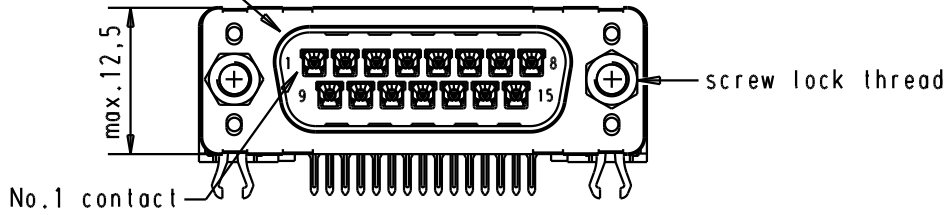
4

3

2



1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802



Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

| | | | | | | | | | | | | | | | | | | | |
|----------------|-------------------|-------------------|-------|-----------|------|---|--|---|--|----------------------------|--|--|--|--|--|--|--|--|--|
| 09 65 263 3833 | M3 | 1 | | | | | | | | | | | | | | | | | |
| 09 65 263 6833 | M3 | 2 | | | | | | | | | | | | | | | | | |
| 09 65 263 7833 | M3 | 3 | | | | | | | | | | | | | | | | | |
| 09 65 263 3813 | 4-40 UNC | 1 | | | | | | | | | | | | | | | | | |
| 09 65 263 6813 | 4-40 UNC | 2 | 31892 | 22/04/04 | JH | | | | | | | | | | | | | | |
| 09 65 263 7813 | 4-40 UNC | 3 | 31084 | 04/SEP/02 | YT | | | | | | | | | | | | | | |
| Part number | Screw lock thread | Performance level | Mod. | Dat. | Name |  | | D-Sub, male, standard angle, 15 poles, with solder pin, screw lock, grounding board lock. | | Moßstab/ Scale 1.5:1 | | | | | | | | | |
| | | | | | | HARTING EURL F-95972 Paris | | TB 0965263x8x3 | | Blatt/ Page 1 / | | | | | | | | | |
| | | | | | |  | | Sub. | | | | | | | | | | | |