

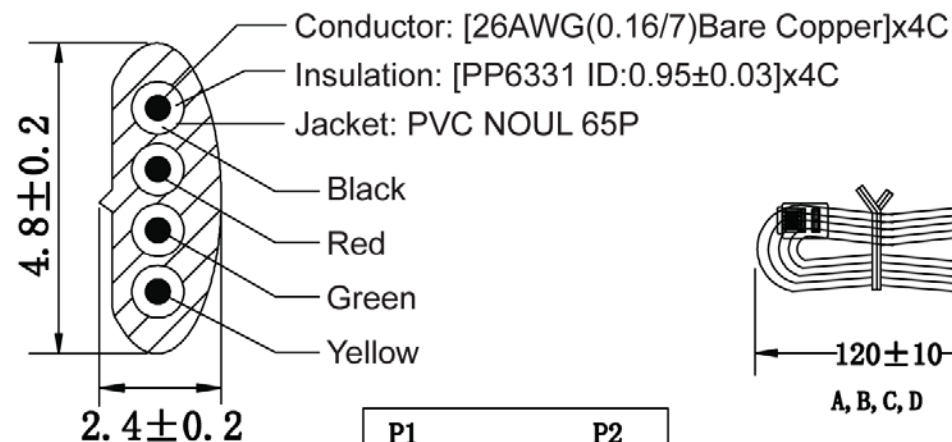


P1



Note:

- Material: Housing-polycarbonate, clear
- Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate.
- Area, Gold Flash over the remainder.
- Over 2.54mm[.000100] thick nickel underplate.



P1	P2
1 BLACK	1
2 RED	2
3 GREEN	3
4 YELLOW	4

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-4/4/W-5-OE	A	1,525±20(5ft)	White	1,525-1,535mm
AT-S-26-4/4/W-7-OE	B	2,135±30(7ft)	White	2,135-2,145mm
AT-S-26-4/4/W-10-OE	C	3,050±60(10ft)	White	3,050-3,060mm
AT-S-26-4/4/W-12-OE	D	3,660±60(12ft)	White	3,660-3,670mm
AT-S-26-4/4/W-14-OE	E	4,270±60(14ft)	White	4,270-4,280mm
AT-S-26-4/4/W-25-OE	F	7,625±100(25ft)	White	7,625-7,635mm
AT-S-26-4/4/W-50-OE	G	15,250±150(50ft)	White	15,250-15,260mm

SEC:A-A

Unit: mm



Scale	Free				Date	Name
TOLERANCE					Drawn	28.06.13 Wilson
X.	±X				Approved	28.06.13 Groll
X.X	±X					
X.XX	±X					
DIM	TOL					
X.°	±X°					
X.X°	±X°					
Angle	TOL	Id.	Modification	Date	Name	



Title Modular cable - Straight/Open 4P4C 50µ", 26AWG, White, 5-50 feet	
ASSMANN WSW-No. AT-S-26-4/4/W-xx-OE	
Drawing-No.	rev00
Replace	Sheet 1/1