
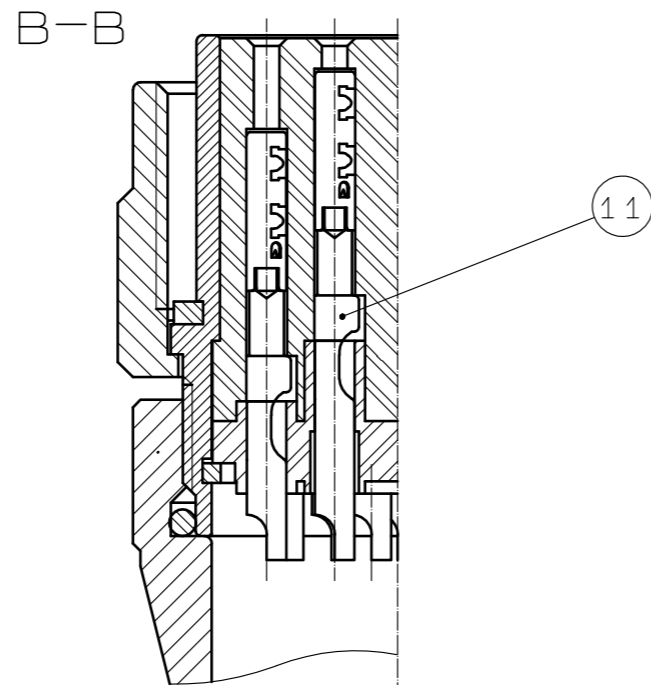


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

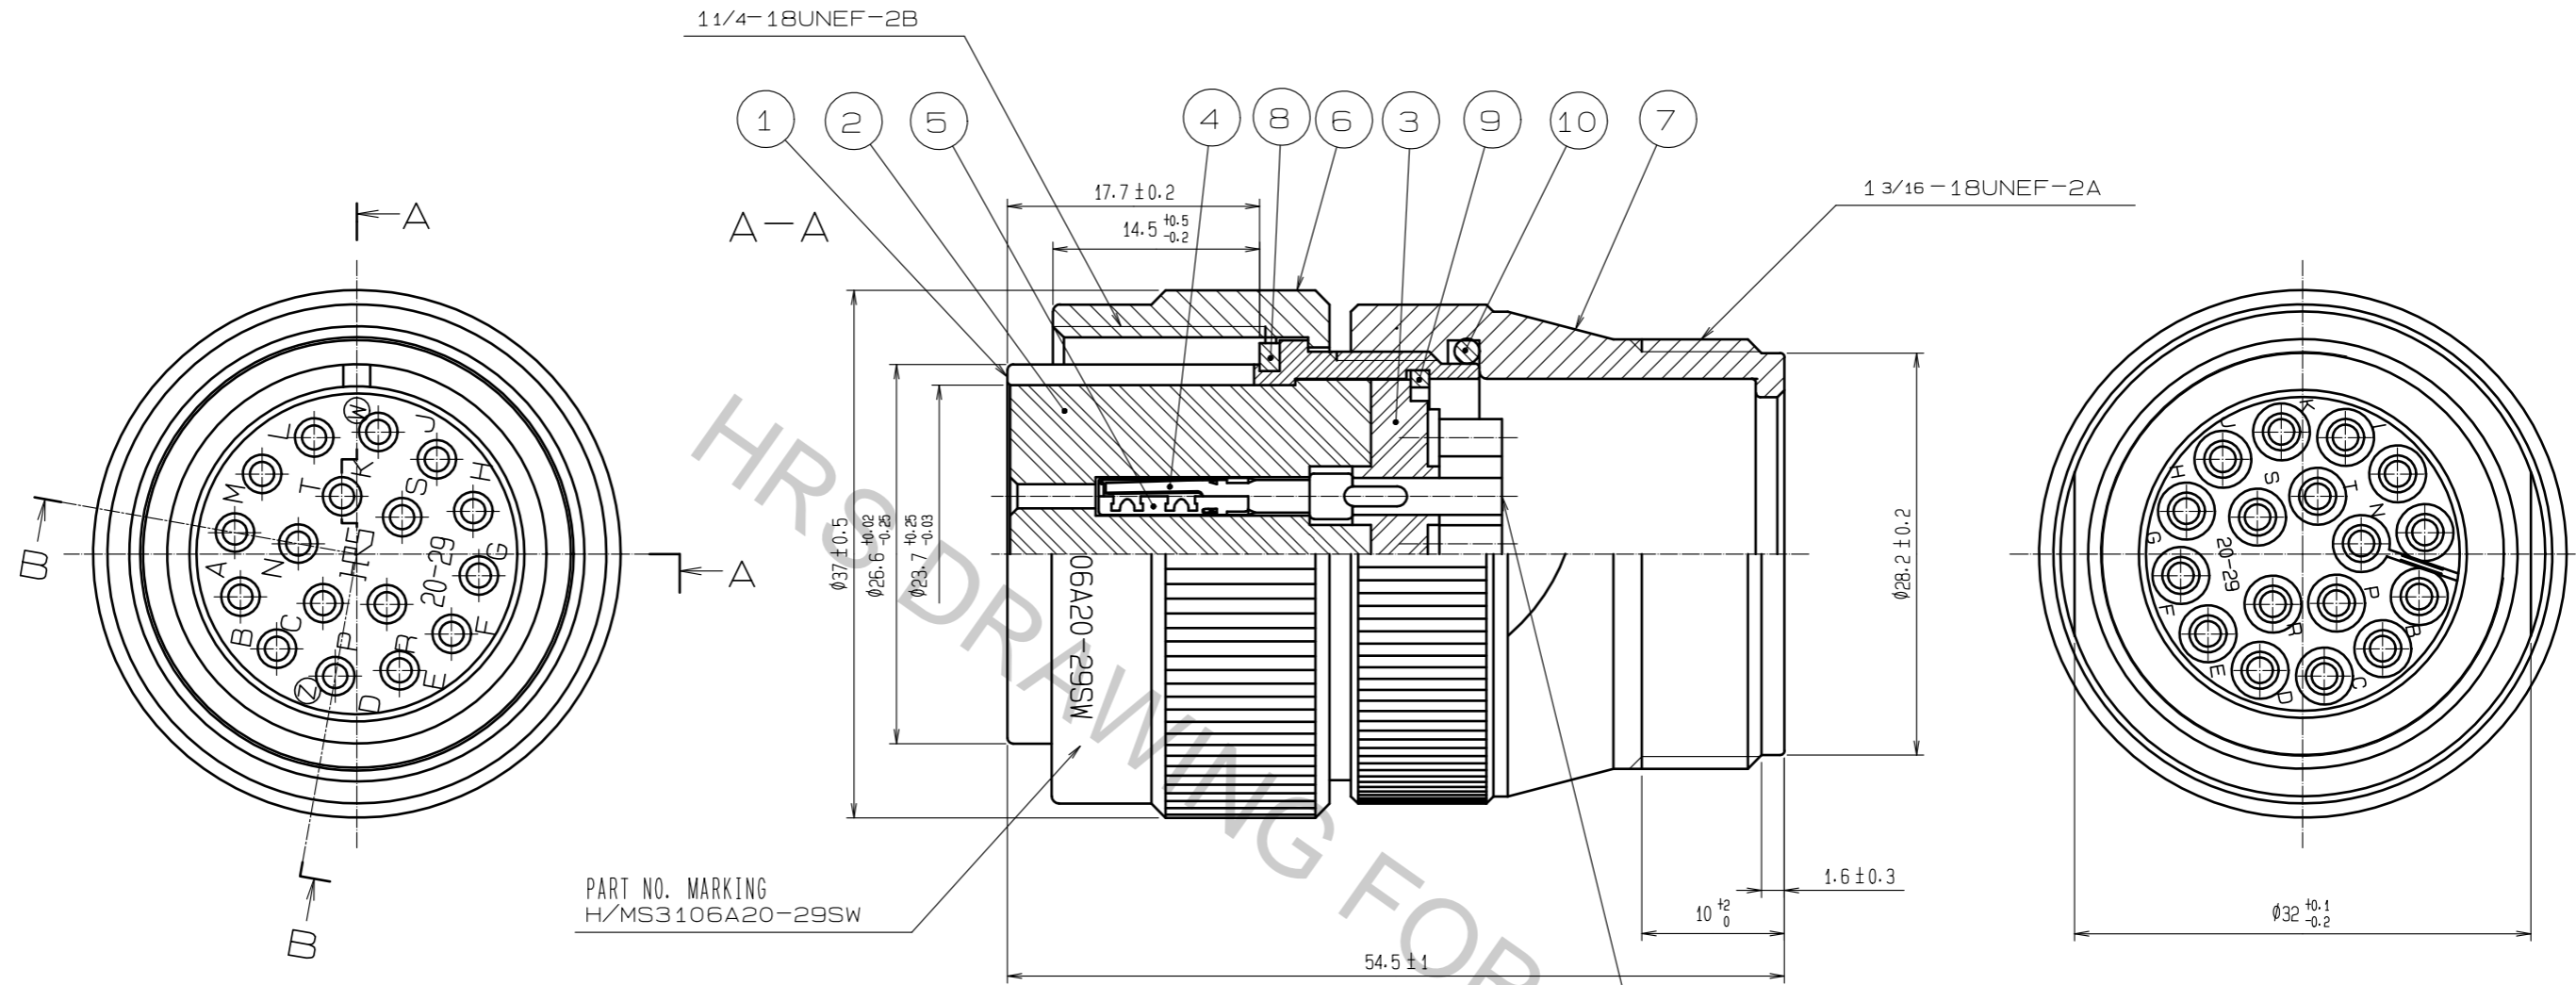

NOTE 1 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑦ TO REF. NO. ① IS SHOWN.

5	STAINLESS STEEL		11	COPPER ALLOY	SILVER PLATING 2 μm min.
4	COPPER ALLOY	SILVER PLATING 2 μm min.	10	SILICONE RUBBER	(BLACK)
3	PBT	(BLACK) UL94V-0	9	PHOSPHO BRONZE	NICKEL PLATING
2	PBT	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)
1	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)	7	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)
			6	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.			APPROVED : HY. KOBAYASHI	18.06.08	DRAWING NO.	EDC-036138-77-00			
			CHECKED : HY. KOBAYASHI	18.06.08	PART NO.	H/MS3106A20-29SW(77)			
			DESIGNED : HY. KISHI	18.06.08	CODE NO.	CL120-0611-7-77			
			DRAWN : HY. KISHI	18.06.08					