

1

2

3

4

5

6

7


A

2,54xNo.of Positions+4,70±0,25

2,54xNo.of Positions+0,90±0,20

2,54xNo.of Positions-2,54±0,15

2,54±0,10

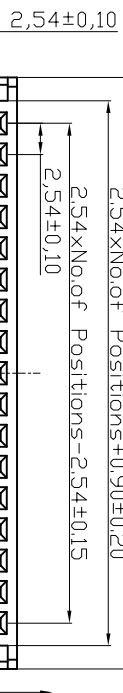

A

NOTES:MATERIAL

1. Insulator Material: PBT +30% GF (UL94V-0)
2. Contact Material : Brass
3. Contact Plating :

AWP xx-8240-T : Gold flash over Ni
AWP xx-8540-T : Tin over Ni

B

ELECTRICAL

1. Current Rating : 3AMP
2. Withstand Voltage : 1000V AC/DC
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL



1. Operation Temperature: -40°C to +105°C
2. Packing: Tray

C


②

- 6P-8P Without Slot "M" and "N"
- 10P-12P With Slot "M", Without Slot "N"
- 14P-64P With Slot "M" and "N"

D

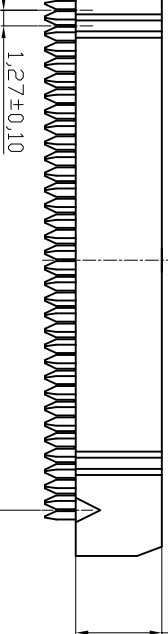


E



Section A-A

F

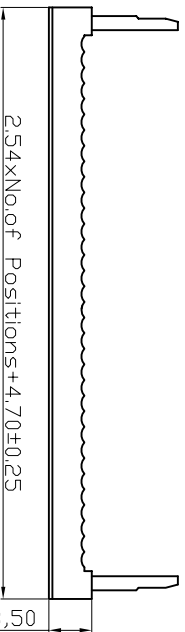

G

RoHS compliant

Scale 1:1

TOLERANCE

X.X ±0,40

X.XX ±0,25

X.XXX ±0,15

Angle ±3°

②	Drawn	Dean	28.03.2013
①	Drawn	Dean	21.12.2009
	Modification		

Customer-No.

Date

Name

ASSMANN WSW-No.
AWP XX-8X40-T

Drawing-No.

ASS 2261A CO rev02

Replace

Sheet

1

2

3

4

5

6

7

H

H