

Specification Status: RELEASED

Electrical Rating
Voltage: 30V MAX
Current: 100A MAX

Leads:
 Nickel: 0.125 mm Nominal
 Thickness

Tape:
 Polyester

Marking:
 _____ Manufacturer's Mark
 XX 350 _____ Part Identification
 □□□□ _____ Lot Identification

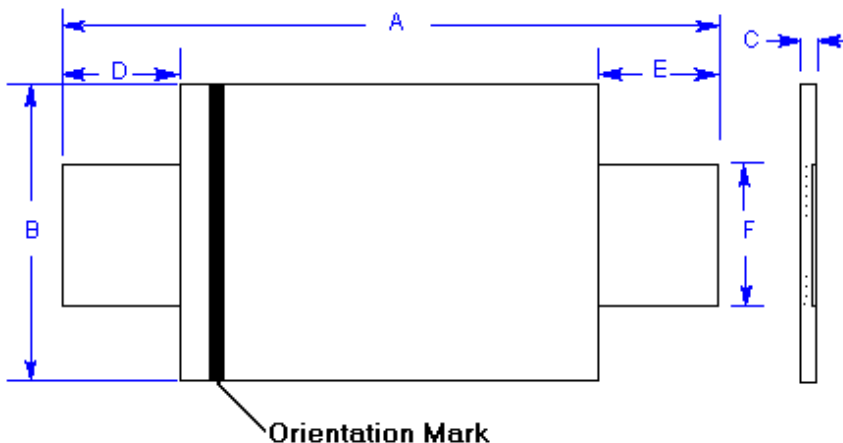


TABLE I. DIMENSIONS:

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	28.4	31.8	13.0	13.5	0.5	1.1	6.3	8.9	6.3	8.9	6.0	6.6	--	--
in*:	(1.12)	(1.25)	(0.51)	(0.53)	(0.02)	(0.04)	(0.25)	(0.35)	(0.25)	(0.35)	(0.24)	(0.26)	--	--

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION				
	AMPS AT 0°C		AMPS AT 20°C		AMPS AT 60°C		AMPS AT 80°C						SECONDS AT 20°C, 20 A		OHMS AT 20°C	
20°C HOLD	AMPS HOLD	AMPS TRIP	AMPS HOLD	AMPS TRIP	AMPS HOLD	AMPS TRIP	AMPS HOLD	AMPS TRIP	TYP	MAX	MIN	MAX	MIN	MAX	TYP	MAX
3.5	4.3	7.2	3.5	6.3	2.5	4.4	--	--	1.5	3.0	0.017	0.031	0.017	0.050	1.9	2.5

Recognitions: UL/TUV approved
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.