

## SUMMARY



*Image is for illustrative purpose only*

### # Wires

Low	2
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	0S
Termination type	Male solder
IP rating	50
Cable Ø	3.80 - 4.40 mm
Matching parts	ERA.0S.302.CLL
Status	NRND
Alternative part	FFA.0S.302.CLAC44

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug, cable collet
Keying	Hermaphroditic keying ("half moon" insert), plug has male pin 1
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C42: 3.8 - 4.4 mm
Variant	

### Performance

Configuration	0S.302 : 2 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	10 Amps

### Specifications

Contact Type:	Solder
Max. Matings:	5000
Contact Dia.:	0.9 mm (0.0354in)
Bucket Dia.:	0.8 mm (0.031in)
Max. Solid Conductor:	0.34 mm <sup>2</sup> (AWG 22)
R (max):	4.8 mOhm


Vtest: 1500 V (AC), 2100 V (DC)

## Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -55°C / +250°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >144 hr  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
IP Rating: 50

## DRAWINGS

### Draws

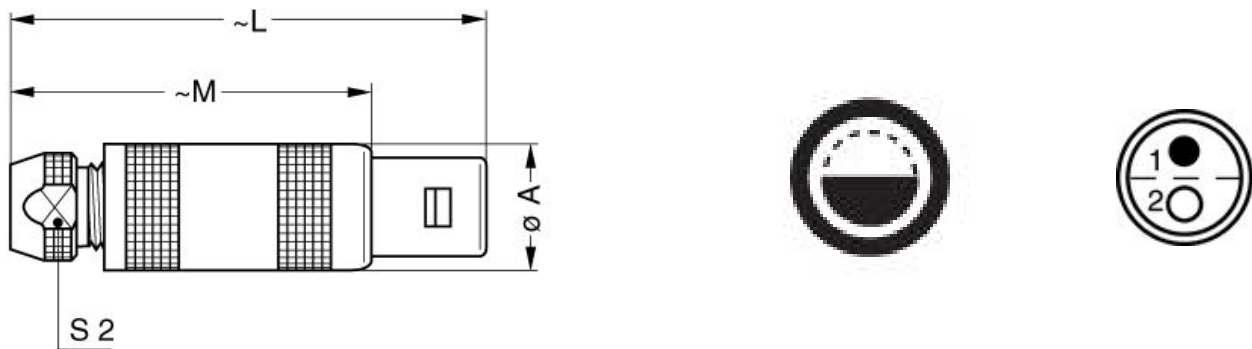

### Dimensions












	A	C	L	M	S2
mm.	9	4.2	34.5	24.5	6.5
in.	0,35	0,17	1,36	0,96	0,26

## RECOMMENDED BY LEMO

### Tools

Spanner wrench: DCD.05.005.PA065

### Cables

002 280	PVC	Black	
020 140	PVC	Grey	
020 140	PVC	Grey	
020 142	PVC	Red	
020 143	PVC	Green	
020 144	PVC	Black	
020 145	PVC	Yellow	
020 146	PVC	Black	
020 260	PVC	Black	
020 264	PVC	Black	
020 266	PVC	Violet	
120 250	PVC	Grey	