


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		ECR-14-011637	14AUG2014	HZ	RZ

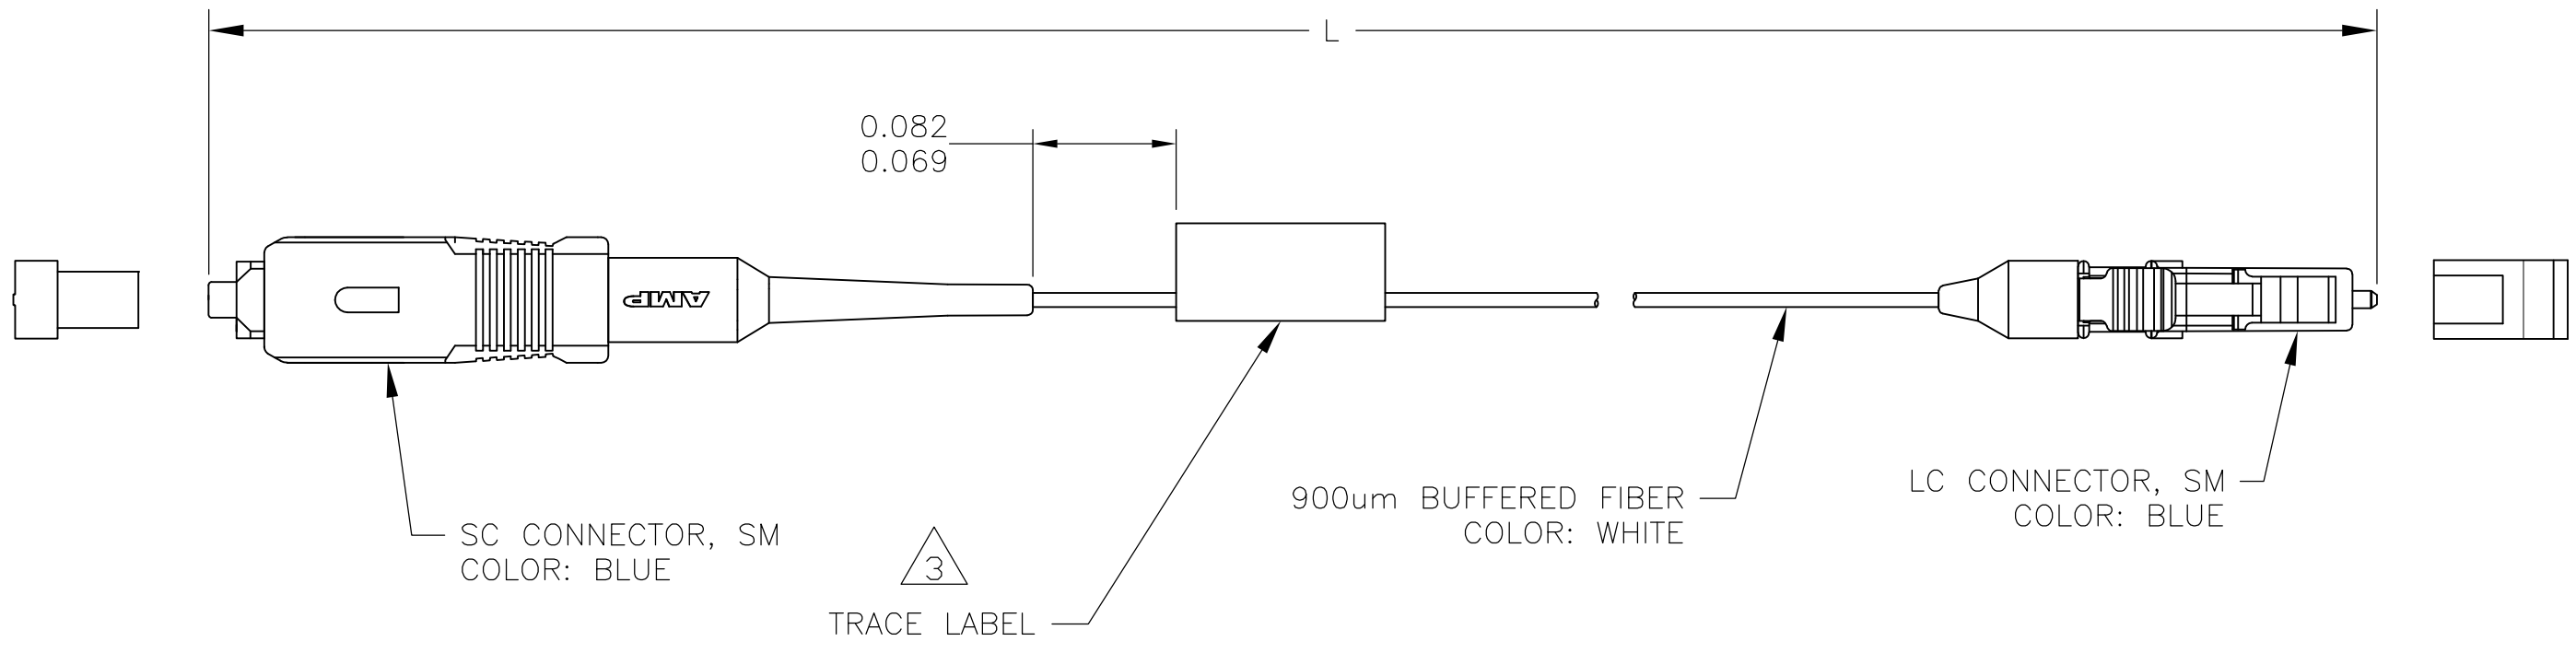

1. MAXIMUM INSERTION LOSS AT 1310nm:
 0.5 dB SC
 0.2 dB LC

2 MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.

3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702

0.50	0.20	5.00±0.08 [196.8±3.0]	2064845-5
0.50	0.20	4.00±0.05 [157.5±3.0]	2064845-4
0.50	0.20	3.00±0.05 [118.1±2.0]	2064845-3
0.50	0.20	2.00±0.05 [78.7±2.0]	2064845-2
0.50	0.20	1.00±0.05 [39.4±2.0]	2064845-1
MAX IL (dB) SC	MAX IL (dB) LC	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.BRIGGS 07MAY2010	STE TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 07MAY2010														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 07MAY2010	NAME CABLE ASSY, FIBER OPTIC, 900um, SM. SC TO LC													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	APPLICATION SPEC -	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -	FINISH -	WEIGHT -	SIZE A3	CAGE CODE 00779												
CUSTOMER DRAWING			DRAWING NO C-2064845	RESTRICTED TO -												
			SCALE NTS	SHEET 1 OF 1												
			REV B													