




ATS Extrusion Profiles

ATS PART # ATS-EXL1-254-R0

Features & Benefits


- » Aluminum extrusions are the most cost-effective solution for the majority of electronic cooling applications
- » This extrusion profile has 40 fins
- » Extrusion type is straight fin
- » Surface area (in²/in) is 31.00

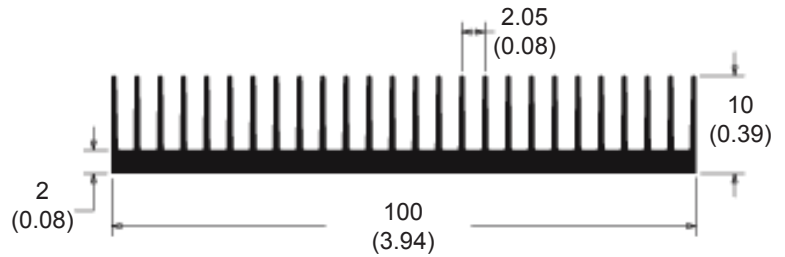

*Image above is for illustration purposes only. See chart below for actual data.

Thermal Performance

HEAT SINK THERMAL RESISTANCE

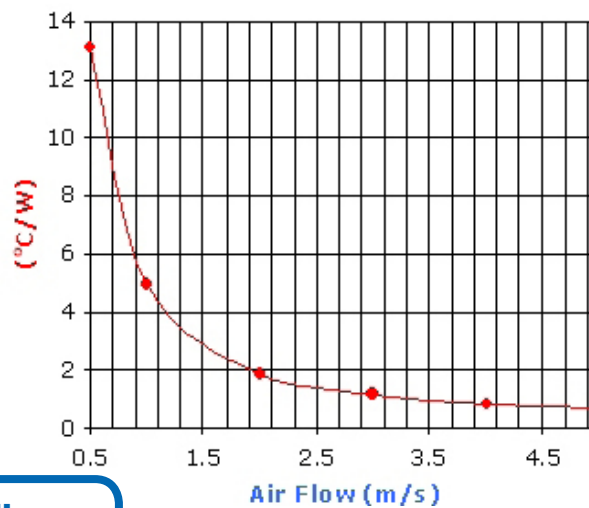

Product Details

| LENGTH | WIDTH | HEIGHT | FIN SPACING | BASE THICKNESS | FINISH |
|--------|--------|--------|-------------|----------------|--------|
| 254 mm | 100 mm | 10 mm | 2.05 mm | 2 mm | NONE |

NOTES:

- 1) Thermal curve based on 76 mm length.
- 2) Thermal performance data are provided for reference only. Actual performance may vary by application.
- 3) ATS reserves the right to update or change its products without notice to improve the design or performance.
- 4) Contact ATS to learn about custom options available.



ATS ADVANCED THERMAL SOLUTIONS, INC.
Innovations in Thermal Management®

For more information, to find a distributor or to place an order, visit www.Qats.com or call: 781.769.2800 (North America); +31 (0) 3569 84715 (Europe).