

NOTES:

1.0 SPECIFICATIONS:

1.1 FREQ. RANGE: DC TO 12.4 GHz

1.2 ATTENUATION ACCURACY:


- 0dB: +0.3/-0dB
- 0.5-10dB: ±0.3dB
- 10.5-20dB: ±0.5dB
- 20.5-40dB: ±1.0dB
- 41-60dB: ±1.5dB

1.3 MAXIMUM VSWR: 1.07 + .015 f (GHz)

1.4 MAXIMUM INPUT POWER: 2 WATTS AVG
AT +25°C DERATED LINEARLY TO
0.5 WATTS AT +125°C

1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

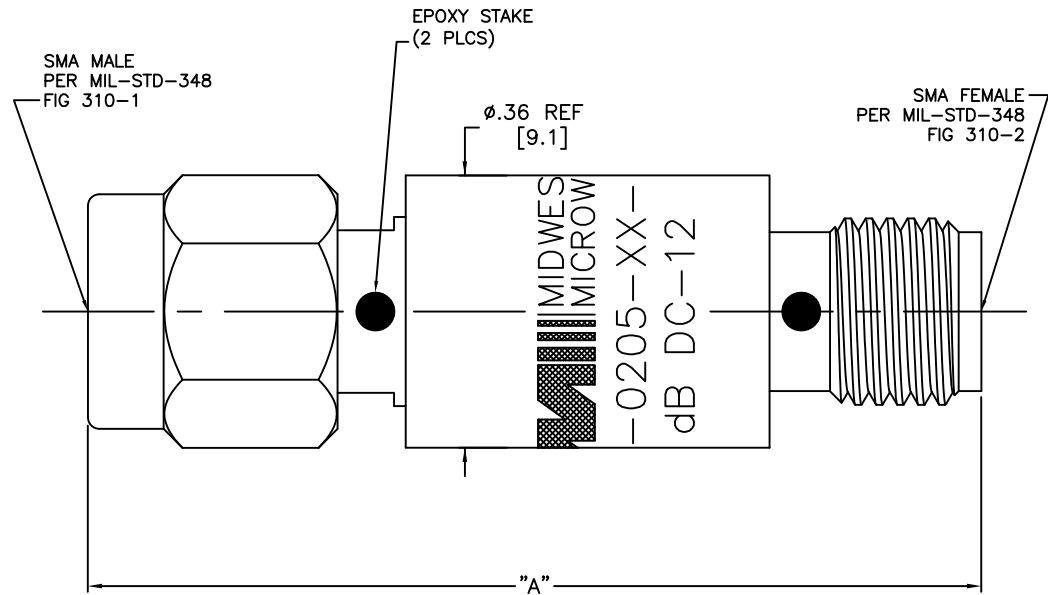

31 to 60 dB	1.30 [37.8]
0 to 30 dB	1.20 [30.5]
-XX- ATTENUATION VALUE	"A"

REV.	DESCRIPTION	DATE
-	RELEASED	3/28/91
A-D	SEE HISTORY FILE	01/05/12
E	ECR 6933	8/17/90
F	ECN 11565	3/3/92
G	ECN 20115	10/5/04
G1	ADDED TITLEBLOCK	11/17/05
J	ECO 24017	12/21/11

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1°</p>	<p>DATE/REV 8/17/90</p>	<p>DATE/REV 3/27/91</p>	<p>DATE/REV 3/26/91</p>
	<p>EMERSON Network Power Connectivity Solutions</p>		
	<p>34078 MIDWEST MICROWAVE</p>		
	<p>ATTENUATOR 0-60 dB OUTLINE DRAWING</p>		
<p>DRAWING NUMBER ATT-0205-XX-SMA-02-01</p>		<p>SCALE: 8:1</p>	<p>REV. J</p>
<p>SHEET 1 of 1</p>			