

DESCRIPTION: 2mm CENTER RIGHT ANGLE HEADER





20 PIN SHOWN

**ELECTRICAL:**

CURRENT RATING: 1 AMPS  
 INSULATOR RESISTANCE: 5,000 MegOhms Min.  
 DIELECTRIC WITHSTANDING: 500V AC  
 OPERATING TEMPERATURE: -40° ~ +105° C  
 MAX. PROCESS TEMPERATURE: 260°C FOR 10SEC.

**MATERIAL:**

CONTACT: COPPER ALLOY  
 INSULATION: NYLON-6T, UL 94V-0  
 PLATING: GOLD FLASH ENTIRE CONTACT

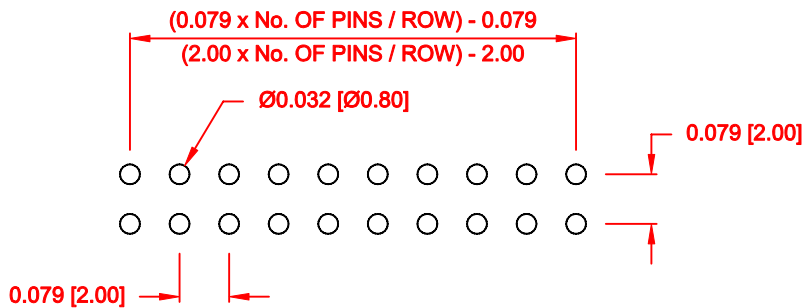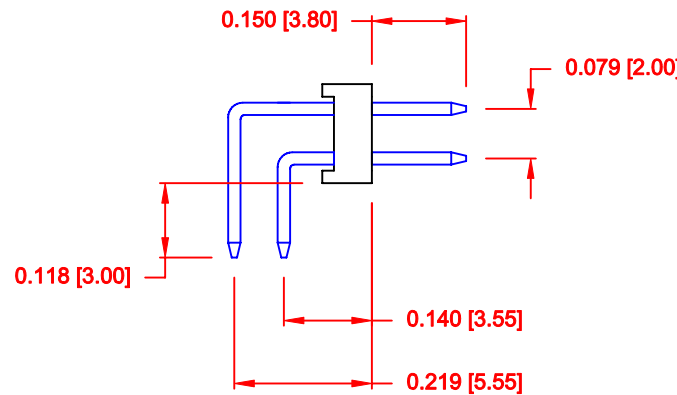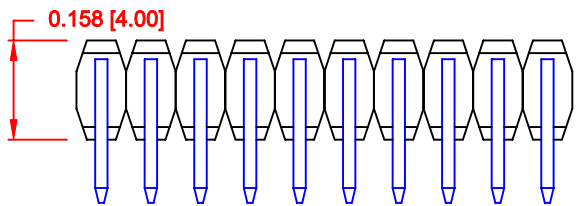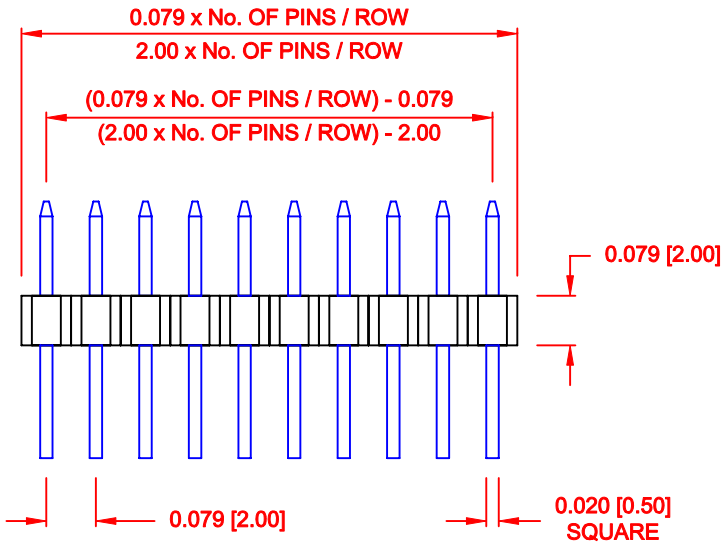

RECOMMENDED P.C. BOARD LAYOUT  
 (ALL TOL. = 0.002)

**2764 YY 02 R P2**

SERIES \_\_\_\_\_  
 2.00mm  
 POSITIONS \_\_\_\_\_  
 2 THRU 72  
 IN INCREMENTS OF 2  
 TERMINATION \_\_\_\_\_  
 02 = RIGHT ANGLE  
 RoHS COMPLIANT \_\_\_\_\_  
 (HIGH TEMP. PROCESS)  
 PACKAGING \_\_\_\_\_  
 TAPE & REEL

**RoHS COMPLIANT**

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>C. SMITH</b>	DATE: <b>07-16-08</b>
			CHECKED:	DATE:
<h1>NorComp</h1>	SCALE: <b>3 : 1</b>	SHEET <b>1</b>	OF <b>1</b>	REV <b>3</b>
	DWG NO. <b>2764YY02RP2</b>			