



For replacement of parts other than listed, tool should be returned to our Factory to insure proper part/crimp adjustment.

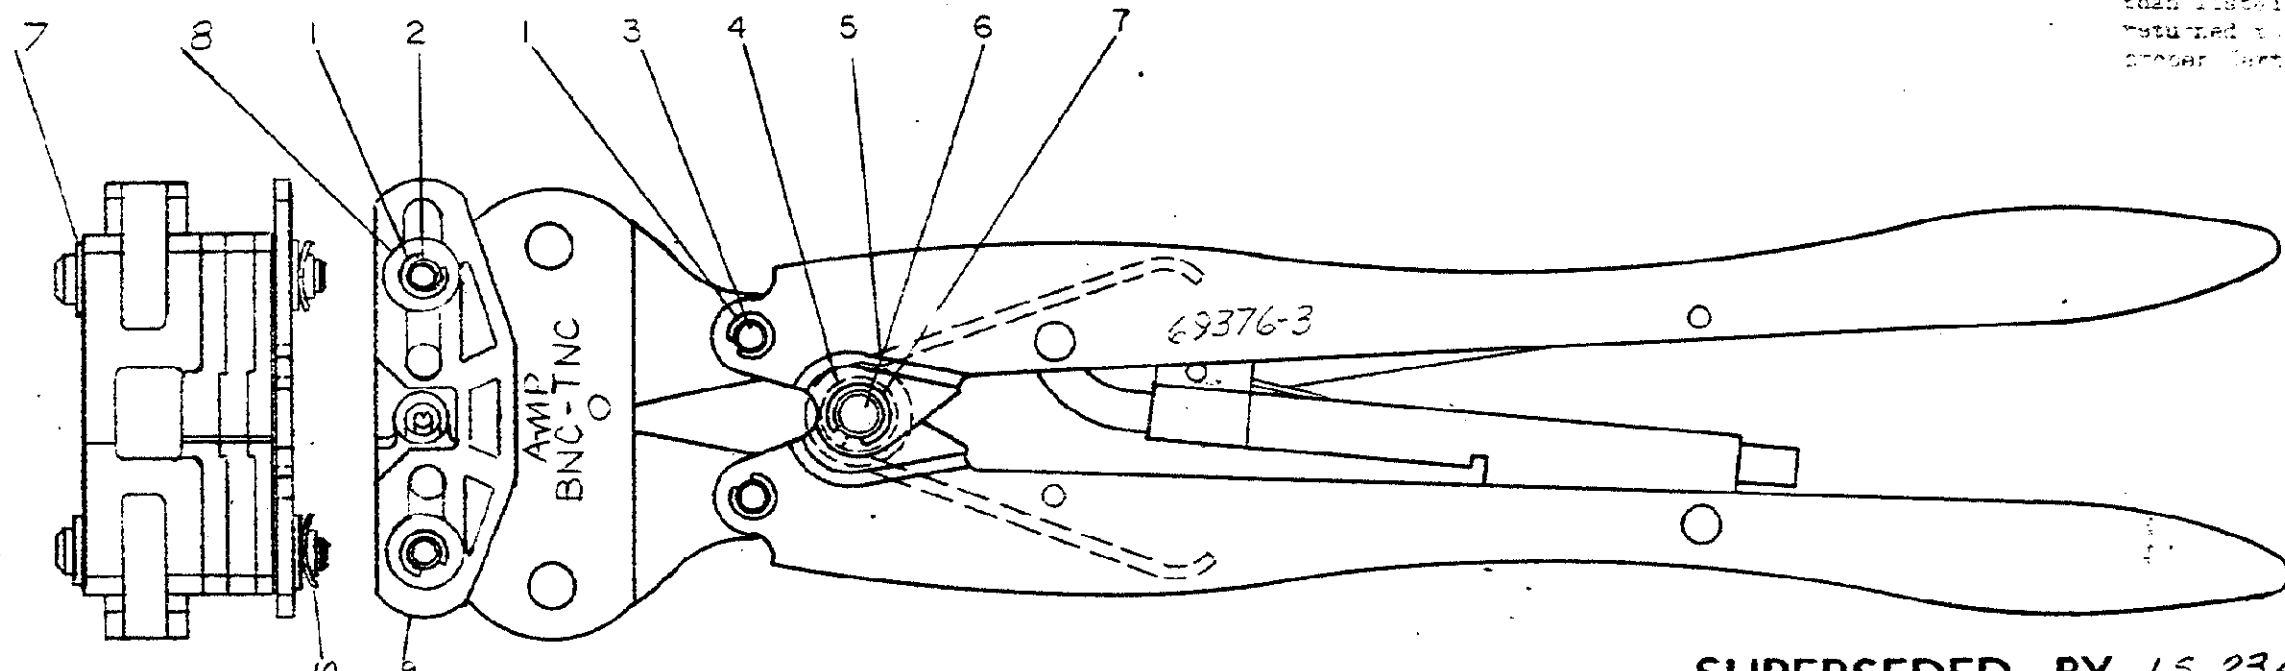

SUPERSEDED BY 1.5.2349

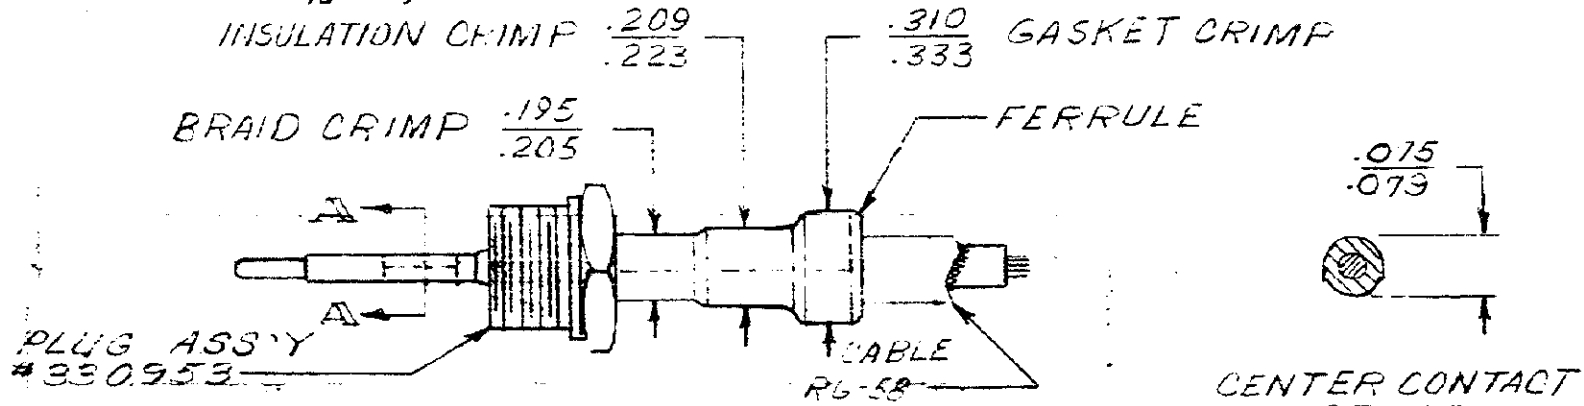

METHOD OF GAGING CRIMP DIMS.
THE CRIMP DIMS. APPLY ONLY TO THE ABOVE COMBINATIONS ON A CRIMPED PRODUCT

2	24088-8	CURVED WASHER	10
1	307089-2	LOCATOR	9
2	125115-1	WASHER	8
4	21045-6	RING - RETAINING	7
1	300449	PIN - RETAINING	6
1	39364	SPRING	5
1	39366	COLLAR	4
2	38783	PIN - RETAINING	3
2	1-306055-3	PIN - RETAINING	2
6	21045-3	RING - RETAINING	1

PRINTED IN U.S.A. DIMENSIONS IN INCHES. DO NOT SCALE DRAWING.

69376-3	REVISION RECORD	DR	CHK	DATE
A	REVISED	B.S.	R	8-67
B	REVISED	PL	RIF	6-50
C	REVISED	PL	RIF	4-55
D	REVISED	B.S.	ENF	1-71
E	REVISED	PL	RIF	3-20
E1	SUP BY 1.5.2349	ENF	RIF	3-20

NUMBER	DESCRIPTION	REQUIRED PER ASSEMBLY

3	DWG SIZE	NUMBER	NAME	REMARKS	REV NO
© 1967 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENT PENDING NO.				CUSTOMER COPY REFERENCE ONLY	
DR: <i>G. J. Flaupnik</i> CRK: <i>R. J. [unclear]</i> 3-23-67 DE: <i>[unclear]</i> APP: <i>[unclear]</i> 4-10-67		MATERIAL AND FINISH: <i>H</i>		AMP AMP INCORPORATED HARRISBURG, PENNA.	
WIRE RANGE: <i>1-5</i> INSULATION: <i>11</i> TYPE: <i>BNC-TNC</i>		TOLERANCE EXCEPT AS NOTED: <i>± .015</i> SCALE: <i>1-1</i>		CLASS: <i>11</i>	
NAME: HAND TOOL ASSEMBLY		LOC: <i>M</i> NO: <i>69376-3</i>		REV: <i>ET</i>	

8 7 6 5 4 3 2 1