

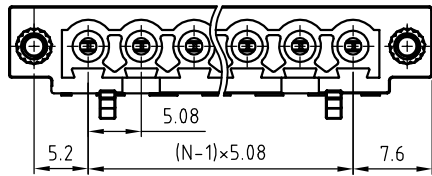


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

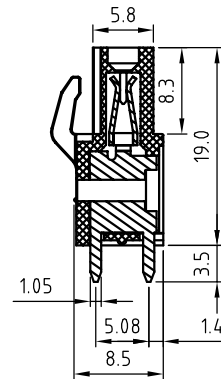

N=Number of poles

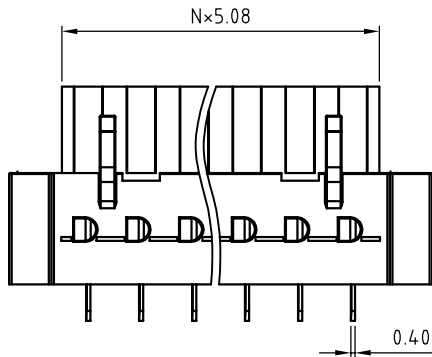

Material

- Wire guard: PhBz(CuSn)
- Surface of solder tail: Tin plated
- With Flange Nut Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0) Electrical


- Voltage rating: 300VAC
- Current rating: 20A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: us

RoHS Compliant

PART NUMBER:

OSTV7XX5250

↓	↓
No. of Poles	COLOR
02 2 Pole	0: Black
03 3 Pole	5: Green (Standard)
... ..	6: Blue
24 24 Pole	8: Light Grey

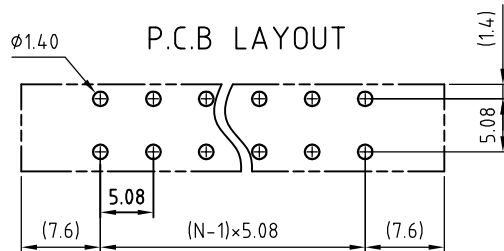

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE: OSTV7 5.08mm Series W/F 180° Vertical 2P-24P							
PART NO. OSTV7XX5250		DWG NO. OSTV7XX5250.DWG		CUST NO.		Tolerance	
APPROVED	CHECKED	DESIGNED	DRAWN			UNIT: mm	X. ±0.5
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Tason 2006.11.11	Tason 2006.11.11			SCALE: NONE	X.X ±0.3
				SHEET: 01/01		REV.: B	X.XX ±0.1
							X° ±1°