


**NOTES:**  
 1. ONLY THE ITEMS WITH QUANTITIES SPECIFIED ON PARTS LIST, ARE USED ON THIS APPLICATOR.

2. AFTER ASSY OF APPLICATOR PROPER SPRING PRESSURE (ITEM 34) CAN BE ACHIEVED BY TIGHTENING SET SCREW (ITEM 123) UNTIL CONTACT IS MADE WITH SPACER (ITEM 32) & THEN TIGHTENING AN ADDITIONAL 5-1/2 TO 6 REVOLUTIONS.

3. TERMINAL POSITIONERS (ITEMS 13 & 14) CAN BE CHANGED TO CENTER TAB IN SLOT WHILE CRIMPING

- KEY:**
- - RECOMMENDED SPARE PARTS.
  - ▼ - LUBRICATE DAILY, USING NO. 20 MACH OIL.
  - - GREASE LIGHTLY.
  - ▲ - APPLY LOCTITE TO ITEMS 124 & 126 AT ASSY.

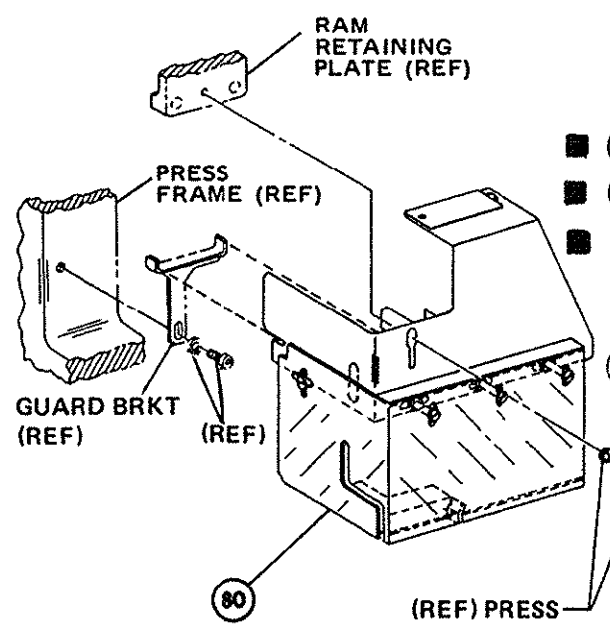

REQ.	PART NO.	DESCRIPTION	NO.	REQ.	PART NO.	DESCRIPTION	NO.
			162				71
			161				70
			160				69
			159				68
			158				67
			157				66
1	1- 21986-2	RING RET "E" (3/16 DIA) PIVOT ARM	156	1	456987-1	BLOCK, PIVOT	65
2	21045-3	RING RET "C" (3/16 DIA) FEED PIN	155	1	457058-1	PIN, PIVOT	64
			154				63
			153				62
			152				61
			151				60
			150	1	455164-1	CAP, HOUSING	59
			149	1	457079-1	HOUSING	58
			148				57
			147	1	25745-1	RING, SPLIT	56
			146	1	240624-1	PIN, FEED FINGER	55
2	4- 21028-9	PIN SLOT SPG (1/8 DIA X .38) RAM	145	1	691499-1	SPRING, FEED FINGER	54
1	3- 21028-2	PIN, SLOT SPG (3/32 DIA X .25) REAR SHEAR PL	144	1	454568-1	FINGER, FEED	53
			143	1	457057-1	ARM, PIVOT	52
1	4-22183-0	PIN, GROVE (.187 DIA X 1.50) FD RETURN SPG	142				51
			141				50
			140	1	3-21002-5	BOLT, CRIMPER	49
			139				48
1	21029-3	PIN, SLOTTED (3/16 DIA X .75) BASE PLATE	138	1	22353-8	SCREW, SHOULDER	47
			137	1	690578-1	BLOCK, INSUL ADJUSTMENT	46
			136	1	690191-1	PLUG, NYLON	45
2	21017-2	SCR, DRIVE #2 X 1/8	135	1	454574-1	RAM	44
1	461264-1	PLATE, IDENTIFICATION	134	1	690125-1	WASHER, LAMINATED	43
4	1- 21899-3	WASHER, FLAT (NO. 8) DRAG STUD & STR GDS	133	1	690124-1	WASHER, RAM	42
4	21024-4	WASHER, LOCK (No. 8) STRIP GUIDE	132				41
2	21024-5	WASHER, LOCK (No. 10) PIVOT BLOCK	131	2	23241-6	BALL, STEEL	40
			130	2	690170-1	SPRING, DISC.	39
1	21022-3	NUT, HEX (SLF LKG)(.032) DRAG STUD	129	1	690142-1	DISC., INSULATION	38
			128	1	3-6906924	DISC., WIRE	37
1	1- 22202-7	NUT, HEX MACH (5/16-24) SPRING HOUSING	127	1	22480-5	WASHER, SPRING	36

1	21061-9	SCREW, SKT SET (8-32 X .25) ANVIL INSERT	126	1	690212-1	POST, RAM	35
2	3- 21012-1	SCREW, SKT SET (6-32 X .38) DRAG	125	1	3- 23846-5	SPRING, HINGE BAR	34
2	4- 21006-0	SCREW, SKT SET (8-32 X .25) HINGE PIN	124				33
1	8- 21007-5	SCREW, SKT SET (5/16-24 X .75) SPRING HOUSING	123	1	690573-1	SPACER, SPRING	32
2	23030-1	SCREW, SKT HD CAP (NYLOK) (6-32 X .25) C.P. DISC.	122				31
1	21009-2	SCREW, SKT SET (1/4-20 X .25) C.P. RAM	121	1	1-22354-8	STUD, DRAG	30
			120	1	454569-1	DRAG, MOUNT	29
1	2- 21002-1	SCREW, BTN HD SKT CAP (8-32 X .38) CRIMPER	119	1	690582-1	PIN, HINGE	28
			118	1	21030-2	DRAG, SPRING MOUNT	27
3	3- 21002-4	SCREW, BTN HD SKT CAP (1/4-20 X .62) BLK STAB	117	1	684905-1	PLATE, BASE	26
7	2-22733-8	SCREW, BTN HD SKT CAP (1/4-20 X .75) HOUSING	116	1	454579-2	BAR, HINGE	25
			115	1	690571-1	BLOCK, STABILIZER	24
2	7-21000-6	SCREW, SKT, NO. CAP (0.032 X 3/1) ANVIL RET. PL.	114	1	690585-1	BLOCK, PRESSURE	23
			113	1	22282-5	SPRING, DRAG	22
2	1-23030-1	SCREW, SKT HD CAP (8-32 X .62) NYLOK, SL BLADE	112	1	21030-6	LEVER, DRAG	21
			111	1	454570-1	DRAG, STOCK	20
4	2- 22603-3	SCREW, HEX HD CAP (8-32 X .63) FR STRIP GUIDE	110	1	454573-1	GUIDE, STRIP, REAR	19
2	2- 21000-8	SCREW, SKT HD CAP (8-32 X .62) REAR STRIP GD	109	1	454571-1	GUIDE, STRIP, FRONT	18
			108				17
			107	1	2- 22287-6	SPRING, FEED RETURN	16
			106				15
4	2- 21000-9	SCREW, SKT HD CAP (8-32 X .75) PRESS BLOCK	105	1	692134-6	POSITIONER, TERMINAL	14
2	21001-3	SCREW, SKT HD CAP (1/4-20 X .62) AIR FD ASSY	104	1	1-692134-6	POSITIONER, TERMINAL	13
2	3- 21000-8	SCREW, SKT HD CAP (10-32 X .88) PIVOT BLOCK	103	1	5- 22280-5	SPRING, TERM. POSITIONER	12
			102	1	454711-1	PLATE, REAR SHEAR	11
4	3- 21000-8	SCREW, SKT HD CAP (10-32 X .88) HSG CAP	101	1	454710-1	INSERT, ANVIL	10
			100	1	1-690569-1	PLATE, FRONT SHEAR	9
1	457244-2	GUARD ASSEMBLY	99	1	690761-1	ANVIL	8
1	457098-1	AIR FEED ASSEMBLY	78	1	454575-4	BLADE, SLUG	7
1	694427-1	PLATE, APPLICATOR, MOUNTING	77				6
			76	1	684906-1	PLATE, ANVIL RETAINING	5
			75	1	690574-1	SPACER TUBULAR, INSUL CRIMPER	4
			74	1	690764-1	CRIMPER, INSULATION	3
			73				2
2	21899-2	WASHER, FLAT (#10)	72	1	690765-2	CRIMPER, WIRE	1
2	690603-1	SPRING, ASSIST	72				1

TERM APPL SPEC 114-2078

CRIMPING DATA				THIS APPLICATOR WILL APPLY	
PAD LETTER	CRIMP HEIGHT	WIRE SIZE	WIRE STRIP LENGTH	60851-1	
A	.089	10			
B	.075	12			
C	NOT USED				
D	NOT USED				
CRIMP	SIZE	TYPE	FEED	PRESS (REF)	
WIRE	.200	TAB	.770	565435-5	
INSULATION	.220	0			42563-6
INSULATION RANGE		WIRE RANGE	APPLICATOR INSTRUCTION	42563-8	
110-210		12-10	AMP 8037	42563-9	
REMARKS AMP-O-LECTRIC® PRESS (AIR FEED)					

SET UP GAGE	LAYOUT NO.	AMP	AMP INCORPORATED HARRISBURG, PENNA.
DRAWN T. KLUNK 4/16/73	APPROVED [Signature]	LOC A	NO. 687389-4
CHECKED [Signature]	REV. [Signature]		
SCALE NAME			
APPLICATOR, MINIATURE QUICK CHANGE			
HINGE BAR FF (750 FLAG FASTON)			
CUSTOMER AND ASSEMBLY DRAWING			

REV	DATE	DESCRIPTION
S	0150-0043-05	
R	0150-8511-98	
P	0150-2637-97	
N	0150-5217-94	
M	0150 4895 93	
L	ECN A-30497	
K	REV PER ECN A-261990	
J	REACTIVATED REV R-7392	
H	REV PER ECN R-5898	
G	REV PER ECN	
F	REV PER ECN	
E	INACTIVE PER ECN	
D	REDRAWN WITH CHANGES	
T	ECR-07-001513	

THIS DRAWING IS UNPUBLISHED.  
 MAY 19, 1982.  
 BY AMP INCORPORATED ALL RIGHTS RESERVED.  
 DIMENSIONS IN INCHES DO NOT SCALE PRINT.  
 3067-1