
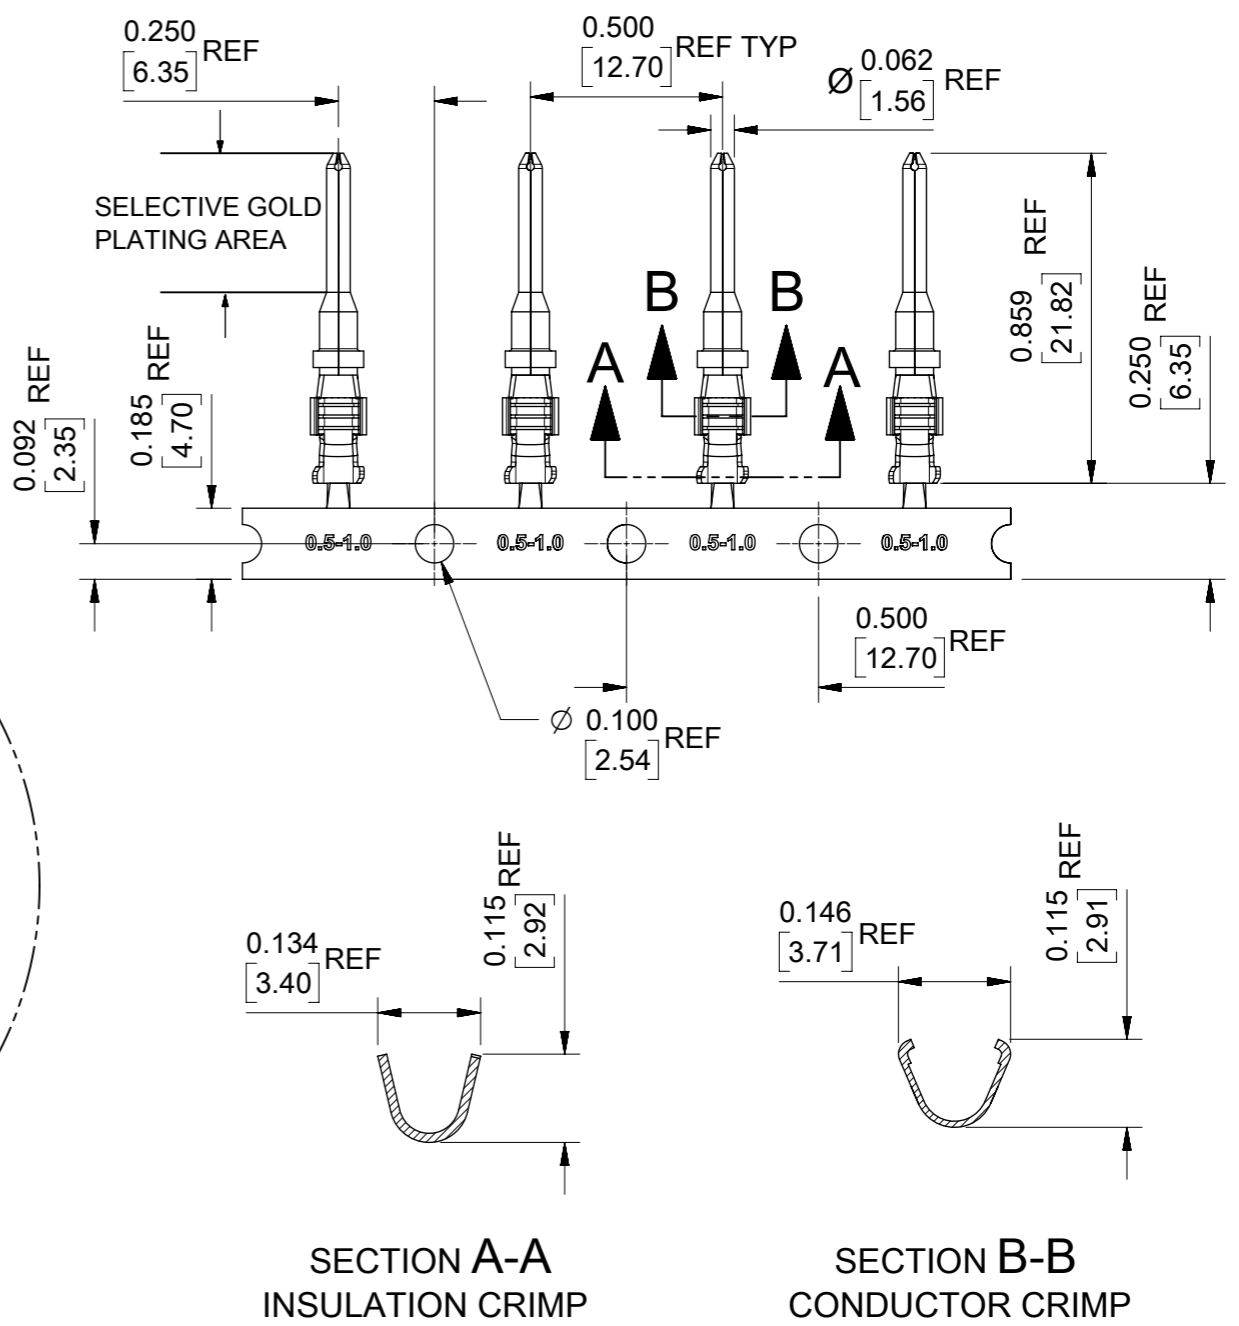


STRIP MATERIAL NUMBER	FINISH
84524-0030	OVERALL NICKEL 80μ" MINIMUM
84524-0028	SELECTIVE HARD GOLD 30μ" MINIMUM OVER NICKEL 50μ" MINIMUM ALL OVER

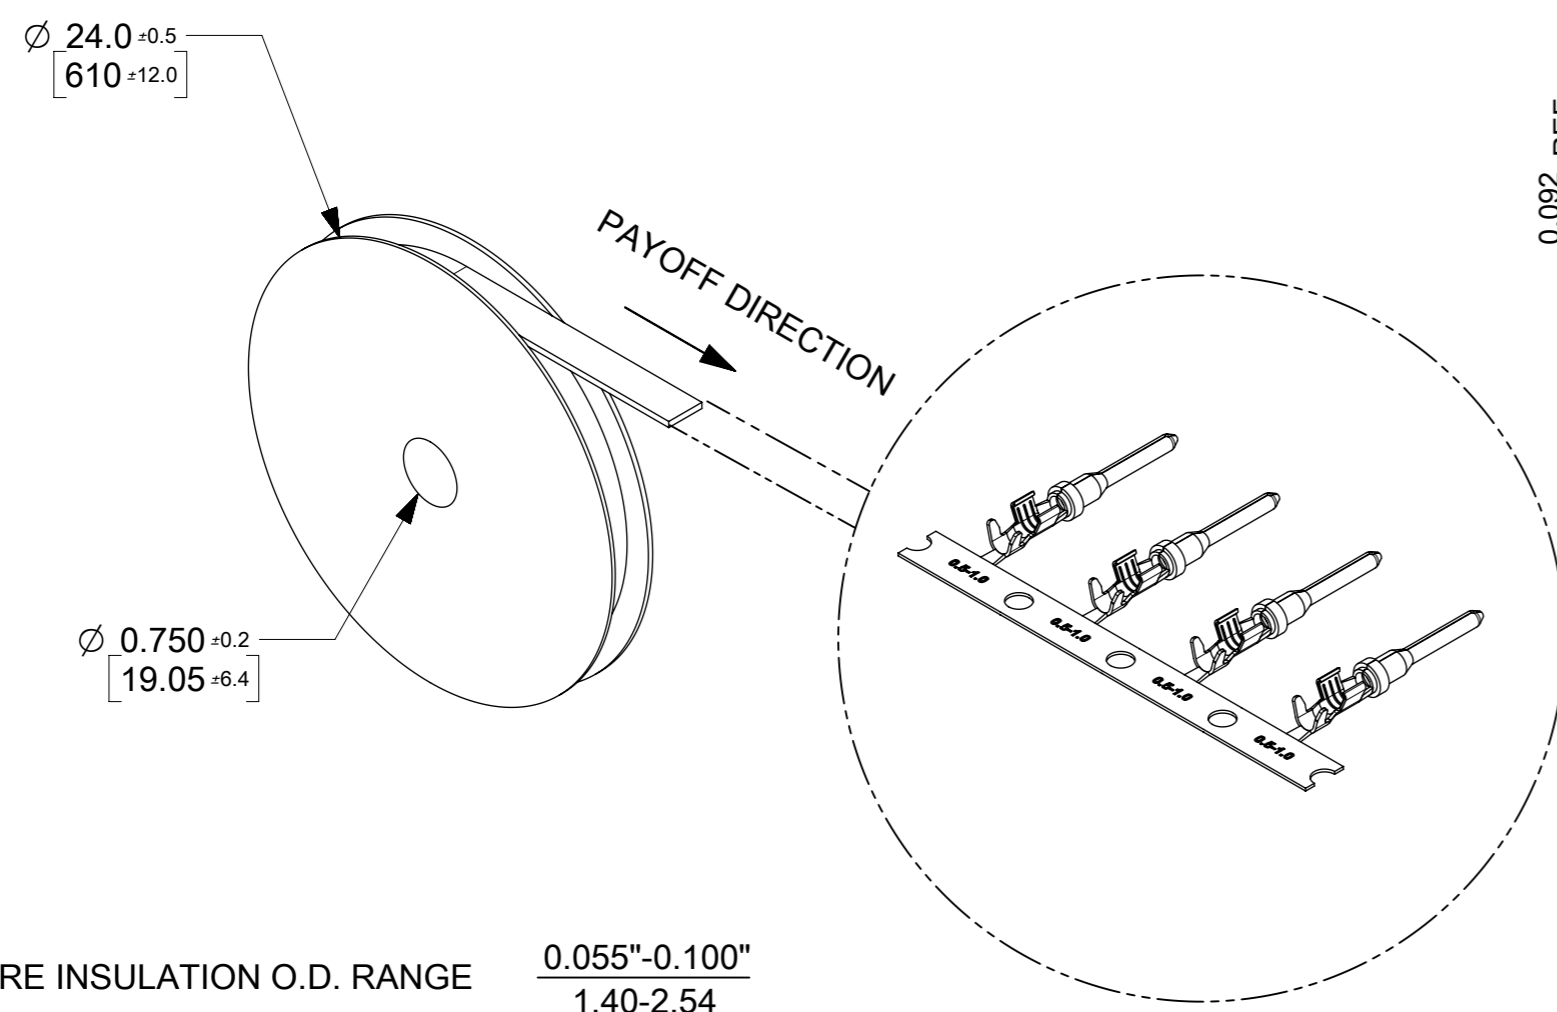

WIRE INSULATION O.D. RANGE  $\frac{0.055"-0.100"}{1.40-2.54}$

SECTION A-A  
INSULATION CRIMP

SECTION B-B  
CONDUCTOR CRIMP

- NOTES:
1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
  2. FINISH: SEE CHART.
  3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
  4. TERMINAL FOR USE ON XRC & ML-XT CONNECTOR ASSEMBLIES.
  5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.
  6. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
QUALITY SYMBOLS	ORIGINAL RELEASE	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS
	2016/01/20	ANGULAR TOL ± 2.0 °	IN/MM
▽ = 0	EC NO: 102582 DRWN: JFLETCHER CHK'D: JDWALLACE	4 PLACES ±	SCALE
▽ = 0		3 PLACES ±	2:1
▽ = 0	REV APPR: JDWALLACE	2 PLACES ± 0.13	DRWN BY
▽ = 0		1 PLACE ± 0.2	JFLETCHER
▽ = 0	A	0 PLACES ±	DATE
▽ = 0		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	2016/01/20
▽ = 0	A3	DRAWING SIZE	CHK'D BY
▽ = 0		THIRD ANGLE PROJECTION	FDUGGAN
		DATE	
		2016/01/22	
		APPR BY	
		JDWALLACE	
		DATE	
		2016/01/29	
		PRODUCT CUSTOMER DRAWING	
		SERIES	MATERIAL NUMBER
		84524	SEE CHART
		CUSTOMER	
		GENERAL MARKET	
		DOCUMENT NUMBER	DOC TYPE
		845240050	PSD
		DOC PART	SHEET NUMBER
		000	1 OF 1