

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	SP
Termination type	
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	SAN.M10.GLA.5A
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	SK_.SP*: Fixed socket, key (N) or keys (P, S and T),blue, with two nuts (back panel mounting) and with elbow print contact
Keying	3 key (alpha=30, plug: male contacts, receptacle: female contacts)
Housing Material	
Cable Fixing	∅ 0 - 0 mm
Variant	A : Blue front nut

Performance


Configuration	
Insulator	
Rated Current	4.2 Amps

Others

IP Rating: 50

DRAWINGS

Draws

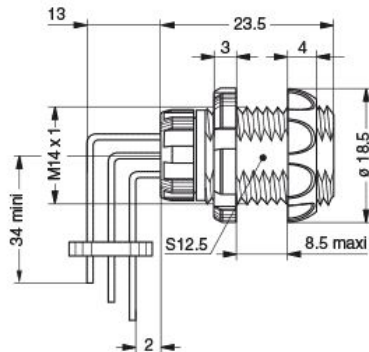

Dimensions

	A	E _{max}	L	N	e
mm.	18.5	8.5	36.5	23.5	M14x1
in.	0,73	0,33	1,44	0,93	

RECOMMENDED BY LEMO

Tools

None

Cables