
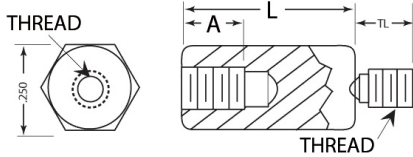


BTS

Brass Male-Female Threaded Standoff



- Provides an electrical connection between the PCB and the chassis
- Sturdy and robust

Material: Brass with Nickel Plating					
Part No	Thread	"L" Standoff Height	"TL"	"A"	Standard Pack
BTS005A	#4-40	.250 (6.4)	.187 (4.7)	.200 (5.1)	500
BTS010A		.375 (9.5)		.250 (6.4)	
BTS015A		.500 (12.7)			
BTS020A		.625 (15.9)			
BTS025A		.750 (19.1)			
BTS030A		.875 (22.2)			
BTS035A		1.000 (25.4)			
BTS040A		1.250 (31.8)		250	
BTS045A		1.500 (38.1)		100	
BTS105A	#6-32	.250 (6.4)	.250 (6.4)	.200 (5.1)	500
BTS110A		.375 (9.5)		.375 (9.5)	
BTS115A		.500 (12.7)			
BTS120A		.625 (15.9)			
BTS125A		.750 (19.1)			
BTS130A		.875 (22.2)			
BTS135A		1.000 (25.4)			
BTS140A		1.250 (31.8)		250	
BTS145A		1.500 (38.1)		100	
BTS205A	#8-32	.250 (6.4)	.375 (9.5)	.200 (5.1)	500
BTS210A		.375 (9.5)		.375 (9.5)	
BTS215A		.500 (12.7)			
BTS220A		.625 (15.9)			
BTS225A		.750 (19.1)			
BTS230A		.875 (22.2)			
BTS235A		1.000 (25.4)			250
BTS240A		1.250 (31.8)		100	
BTS245A		1.500 (38.1)			