1: PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3

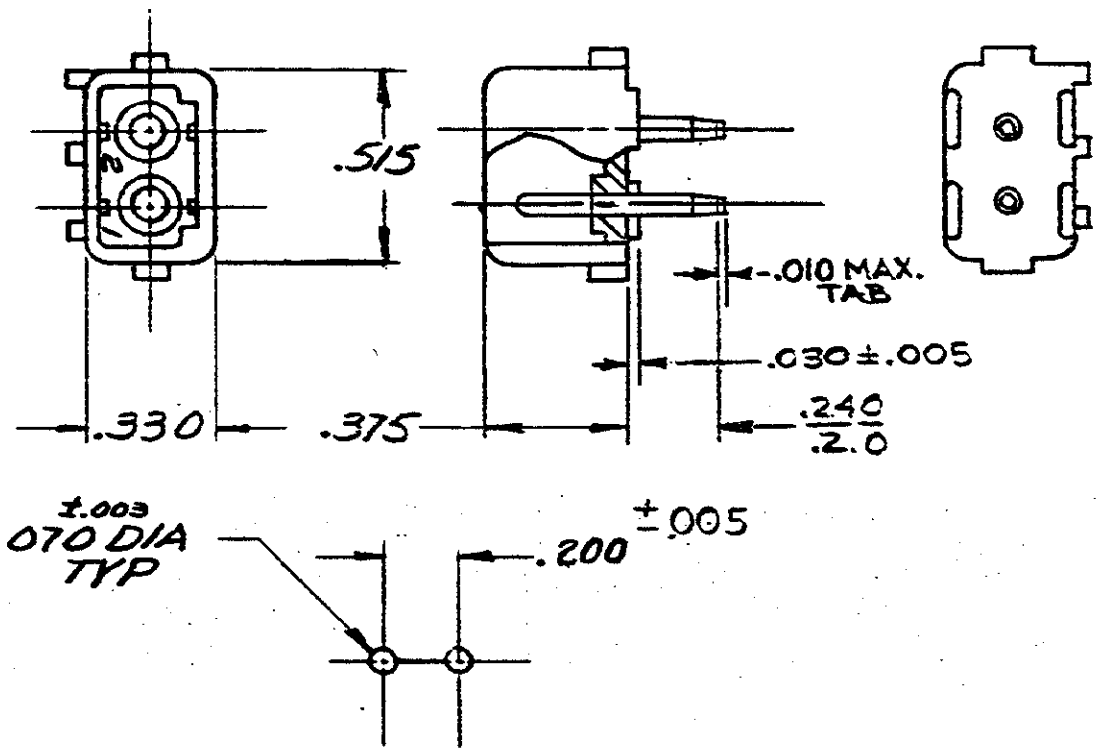


RECOMMENDED LAYOUT FOR .125 THICK P.C. BOARD

| | | |
|---|---|---|
| 350422-1 | NYLON - NAT. | ALLOY COPPER PRE-TIN |
| ASSEMBLY NO. | HSG. MATL & COLOR | PIN MATL & FINISH |

©1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

| | | | | |
|---|---|---|---|---|
| J | RESTORED | BKD | RS | 4-1-85 |
| J | REV. PER M-7375 | SS | GM | 8-27-85 |
| H | 250 / 200 WAS .250, M-7285 | DAS | DH | 8-11-85 |
| G | ADDED NOTE 2, M-6694 | MSF | DH | 4-25-81 |
| F | REV. TAIL LENGTH M-5334 | MF | DH | 5-24-77 |
| E | REVISED M-4161 | MF | DH | 3-3-77 |
| D | ECN M-3871 | PBH | DH | 9-4-76 |
| C | ECN M-3452 | GY | RR | 7-16-76 |
| B | ECN- M-3156 | EQ | DRA | 12-19-75 |
| A | REDRAWN ADDED COLORS | PED | EMS | 10-6-75 |
| LTR | REVISION RECORD | DR. | CHK | DATE |

| | | | | |
|---|---|---|---|---|
| L | OBSOLETE -2<br>PER ECN CM-2709 | KW/RS | 6-26-92 | |
| K | OBSOLETE 1-1, 2-1, 3-1,<br>4-1, 5-1, 6-1, 7-1, 8-1, 9-1,<br>1-2, 2-2, 3-2, 4-2, 5-2, 6-2,<br>7-2, 8-2, 9-2 CM 473 | KW/RS | 4-1-86 | |

NUMBER 350422

REQUIRED PER ASSEMBLY

DESCRIPTION

| | |
|---|---|
| DR | 6-21-73 |
| CHK | 6-25-73 |
| DE | — |
| APP | |

MATERIAL AND FINISH: SEE TABLE.

AMP INCORPORATED HARRISBURG, PENNA

CLASS —

WIRE — RANGE — INSULATION —

TOLERANCE EXCEPT AS NOTED ±.015 ±1°0'

SCALE —

LOC CM | B | NO 350422 | L

NAME 2 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

AP 1253 REV 11/65