


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 9205-HS
HEAT SHRINK: MOLDED NYLON. AVAILABLE IN BLACK.
BODY: BRASS, 40µ [1.02µm] MIN GOLD OVER NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE, 40µ [1.02µm] MIN GOLD OVER NICKEL PLATED.

- P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

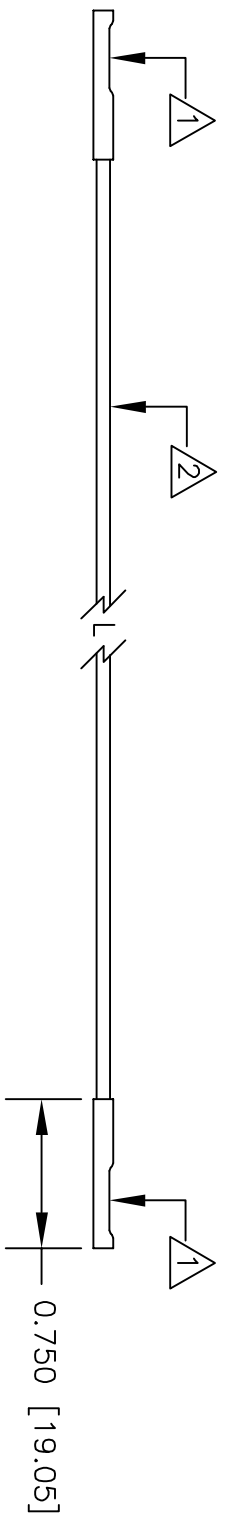

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES

±	.XX ±	±
±	.XXX ±	±

MATERIAL SEE NOTE.
FINISH SEE NOTE.

APPLICATION	USED ON	DO NOT SCALE DRAWING
-------------	---------	----------------------

CONTRACT NO.

APPROVALS	DATE
DRAWN R.L.	10/10
APPROVED BY	

E-Z-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.

DESCRIPTION: 0.025 [0.64] SQ. SOCKET JUMPER

SIZE	CODE	IDENT NO.	DRAWING NO.	REV.
A	08505	9110		
SCALE	1:1			SHEET 1 OF 1