


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 4 PART INDICATED IS PACKAGED IN SINGLE TUBES.
- 5 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 6 FOR 2 POSITION PART ONLY, THE NOTED DIMENSION IS .184
- 7 $\varnothing .020 \text{ M}$ FOR KINKED TAILS
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

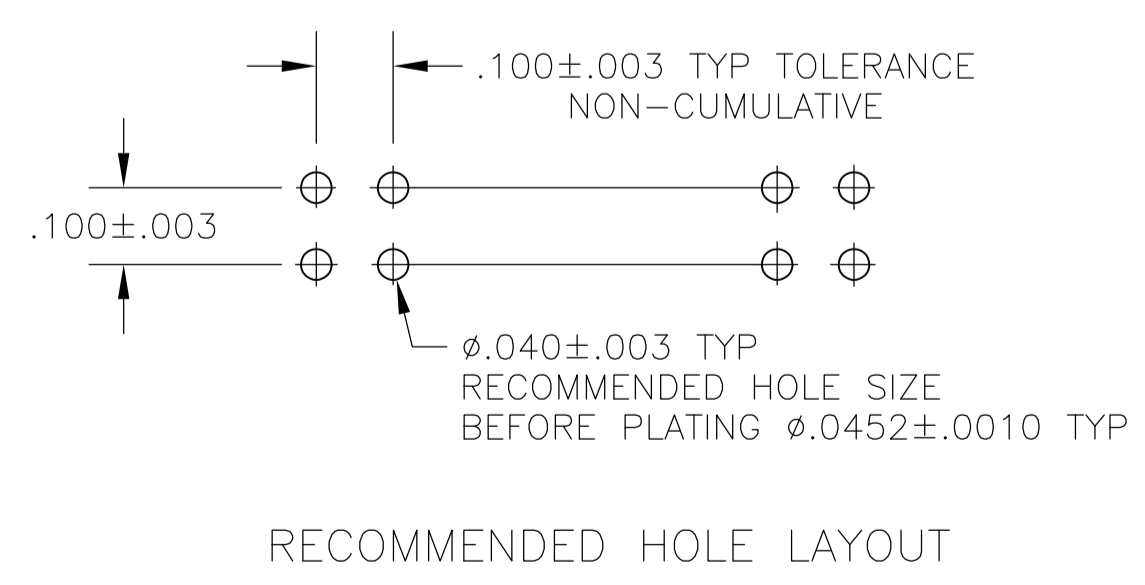

8 OBSOLETE		1.784	1.700	17	36	2-104351-3-
SUPERSEDED BY 104351-8	4	.784	.700	7	16	2-104351-2-
SUPERSEDED BY 1-104351-3	4	1.284	1.200	12	26	2-104351-1-
		3.984	3.900	39	80	2-104351-0
8 OBSOLETE		2.984	2.900	29	60	1-104351-9-
		2.484	2.400	24	50	1-104351-8
		1.984	1.900	19	40	1-104351-7
8 OBSOLETE		1.684	1.600	16	34	1-104351-6-
		1.484	1.400	14	30	1-104351-5-
SUPERSEDED BY 6-146268-4		1.384	1.300	13	28	1-104351-4-
		1.284	1.200	12	26	1-104351-3
SUPERSEDED BY 6-146268-1		1.184	1.100	11	24	1-104351-2
		1.084	1.000	10	22	1-104351-1-
8 OBSOLETE		.984	.900	9	20	1-104351-0
		.884	.800	8	18	104351-9-
		.784	.700	7	16	104351-8
		.684	.600	6	14	104351-7
		.584	.500	5	12	104351-6
		.484	.400	4	10	104351-5
		.384	.300	3	8	104351-4
		.284	.200	2	6	104351-3
		.184	.100	1	4	104351-2
		.084	—	—	2	104351-1
REMARKS	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H MOLL 08FEB88	TE Connectivity
		CHK R FEJDT 08FEB88	
		APVD R FEJDT 08FEB88	NAME
			HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100X.100 CL_VERT, .025 SQ POSTS, WITH RETENTION FEATURE
			APPLICATION SPEC
			SIZE
MATERIAL: HOUSING-FLAME RETARDANT THERMOPLASTIC COLOR-BLACK	FINISH: 300%± GOLD IN CONTACT AREA .000120-.000200 MATTE TIN-LEAD ON SOLDER TAIL ALL OVER .000050 NICKEL	WEIGHT	RESTRICTED TO
18APR01		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV R2