


# SMD Power Inductor 0412CDMCB/DS




Halogen Free

## Dimension - [mm]

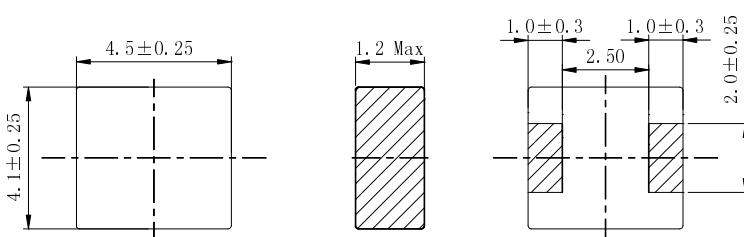

## Land pattern and Schematics - [mm]

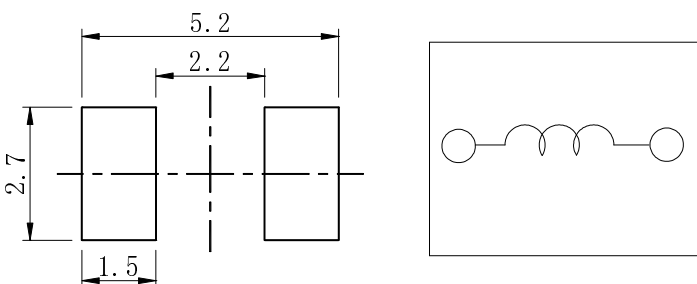

## Electrical Characteristics

Part No.	Stamp	Inductance ( $\mu$ H) [Within] ※1	D.C.R (m $\Omega$ ) [ within ] (at 25°C)	Saturation Current [Typ.] ( A ) ※2	Temperature rise current [Typ.] (A) Thermocouple Method ※3
0412CDMCBDS-R47MC	R47	0.47 ± 20%	19 ± 20%	8.2	5.4
0412CDMCBDS-1R0MC	1R0	1.0 ± 20%	40 ± 20%	5.3	4.5
0412CDMCBDS-1R5MC	1R5	1.5 ± 20%	60 ± 20%	4.4	3.3
0412CDMCBDS-2R2MC	2R2	2.2 ± 20%	79 ± 20%	3.6	2.8
0412CDMCBDS-3R3MC	3R3	3.3 ± 20%	115 ± 20%	3.3	2.3
0412CDMCBDS-4R7MC	4R7	4.7 ± 20%	160 ± 20%	2.7	1.9
0412CDMCBDS-6R8MC	6R8	6.8 ± 20%	240 ± 20%	2.3	1.6
0412CDMCBDS-100MC	100	10.0 ± 20%	370 ± 20%	1.6	1.3

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of DC current when the inductance is over 80% of the initial value. (at 25°C )

※3. Temperature rise current: The actual value of DC current when the top surface temperature of test sample rise is  $\Delta T = 40^\circ\text{C}$  ( $T_a = 25^\circ\text{C}$ ).

## Description

- Magnetically shielded.
- L × W × H: 4.75 × 4.35 × 1.2 mm Max.
- Product weight: 0.12g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging.
- 13 "diameter reel
- 5500pcs per reel

## Applications









- Ideally used in notebook, ultrabook, tablet PC, LCD display, SSD and other low profile high current application.

# SMD Power Inductor 0412CDMCB/DS



## Saturation Current & Temperature Rise Graph

— L (20°C)    —  $\Delta T$

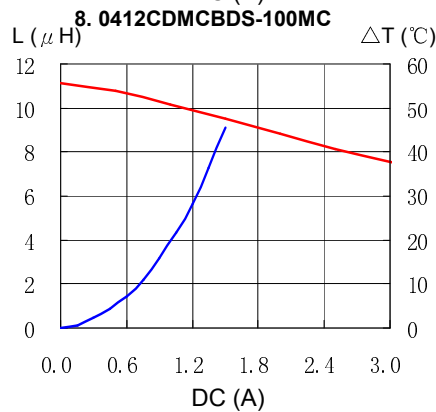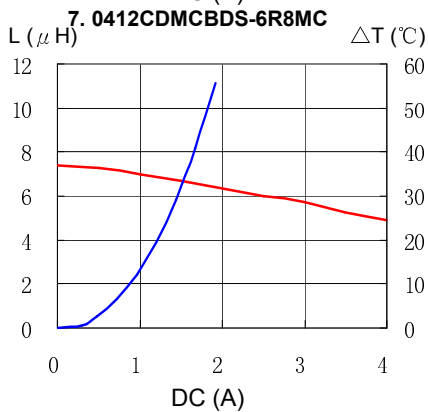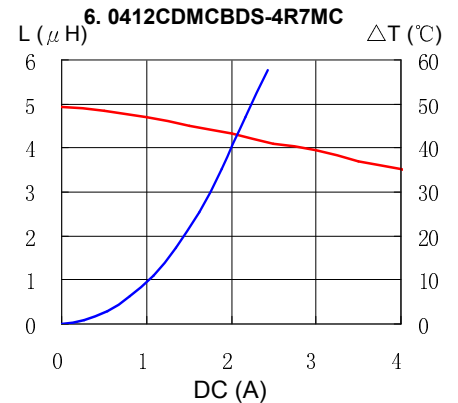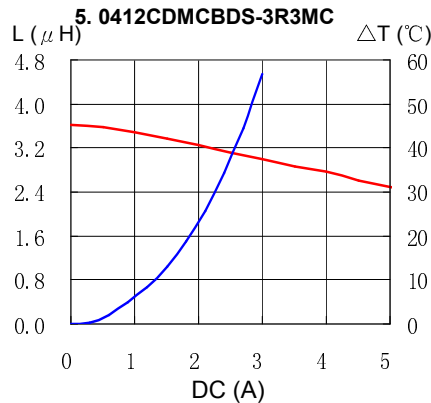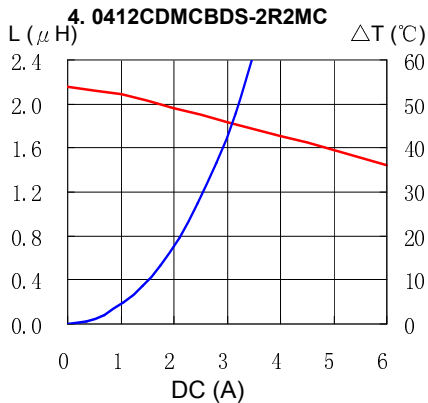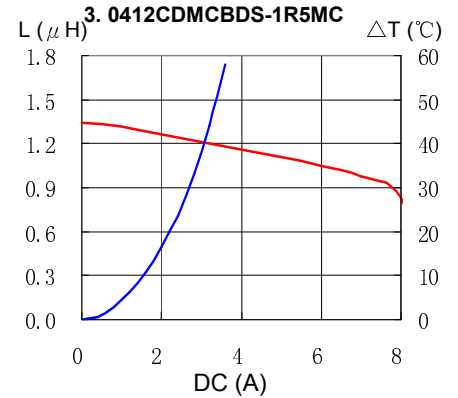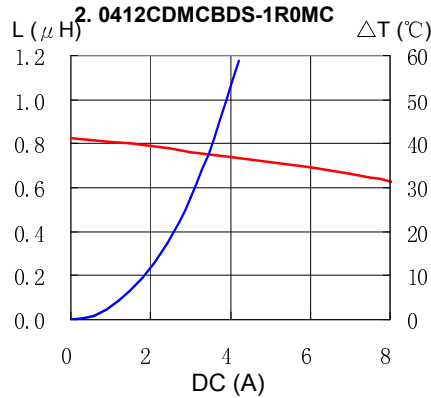
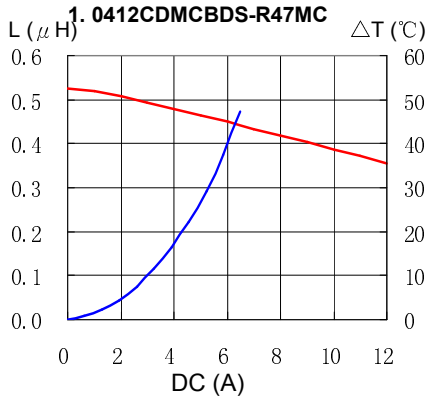


DC (A)

# SMD Power Inductor 0412CDMCB/DS



## Solder Reflow Condition

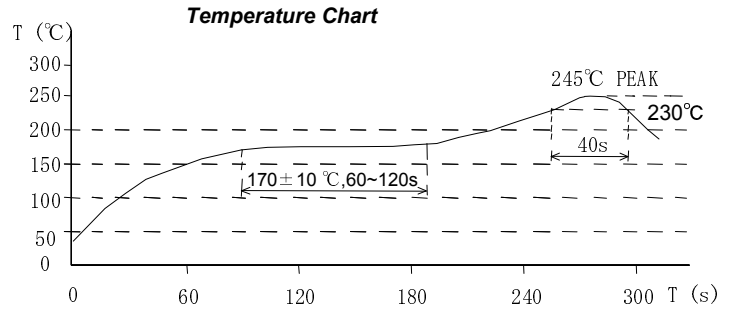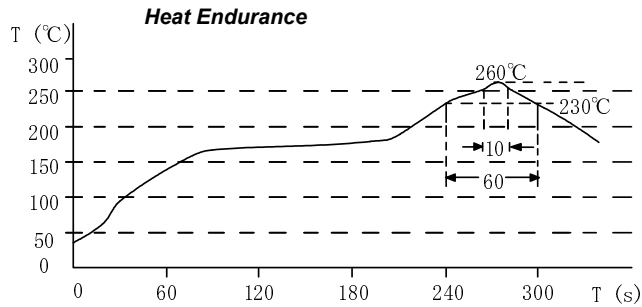

Please refer to the sales offices on our website - <http://www.sumida.com>

**Hong Kong**  
Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

**Saitama(Japan)**  
Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

**Chicago**  
Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

**Shanghai**  
Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

**Seoul**  
Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

**Oberzell**  
Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

**Shenzhen**  
Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

**Singapore**  
Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

**Neumarkt**  
Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

**Taipei**  
Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

**San Jose**  
Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)