

## Key Specifications - Electrical

Operating temperature:	-20 to +65°C
Impedance:	50 ohm
Gain:	1dBi @ 698 - 960MHz 2dBi @ 1710 - 2170MHz 3dBi @ 2500 - 2700MHz
VSWR:	≤3.0
Frequency range:	698 - 690MHz 1710 - 2170MHz 2500 - 2700MHz
Radiation:	Omni
Polarization:	Vertical


## Key Specifications - Mechanical

Weight:	53g
Connector:	SMA
Body material:	ABS757
Mounting method:	Direct connect

### Test Reports


#### Return Loss

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

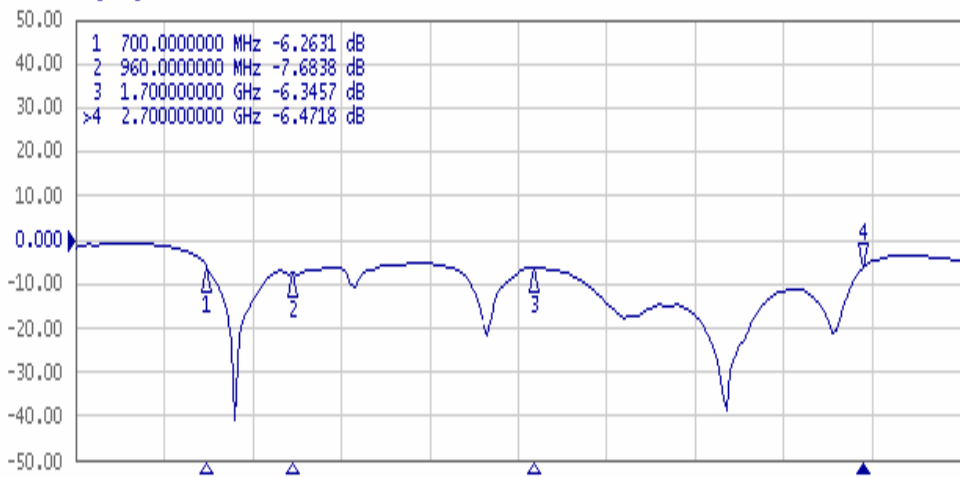

#### VSWR

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

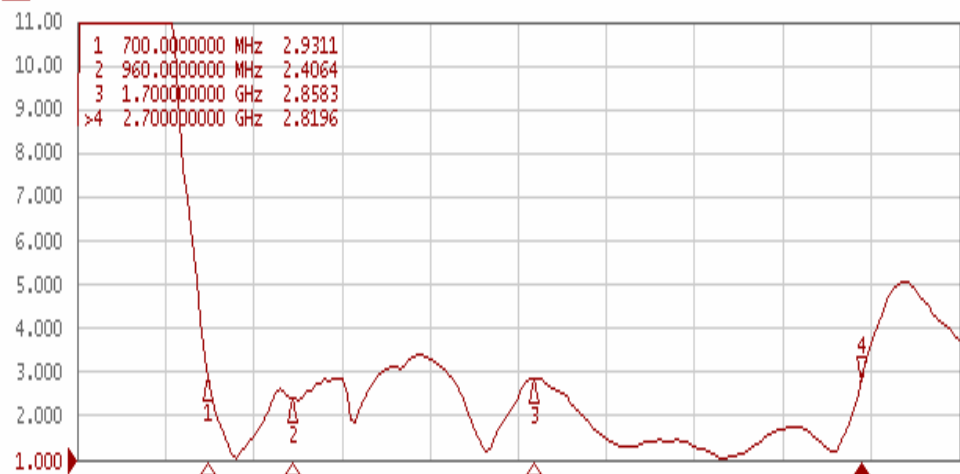

## Radiation Pattern

