


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.00
28	12.00	14.00
32	14.00	16.00
36	16.00	18.00
40	18.00	20.00
44	20.00	22.00
48	22.00	24.00
52	24.00	26.00
56	26.00	28.00
60	28.00	30.00
64	30.00	32.00
68	32.00	34.00
72	34.00	36.00
76	36.00	38.00
80	38.00	40.00
84	40.00	42.00
88	42.00	44.00
92	44.00	46.00
96	46.00	48.00
100	48.00	50.00
104	50.00	52.00
108	52.00	54.00
112	54.00	56.00
116	56.00	58.00
120	58.00	60.00

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Dielectric Withstanding: 500 VAC
 Operating Temperature: -40 Degrees C to +105 Degrees C
 Contact Material: Brass or Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 © Standard: Nylon-6T
 Contact Finish: Selective Plating, Gold/Tin

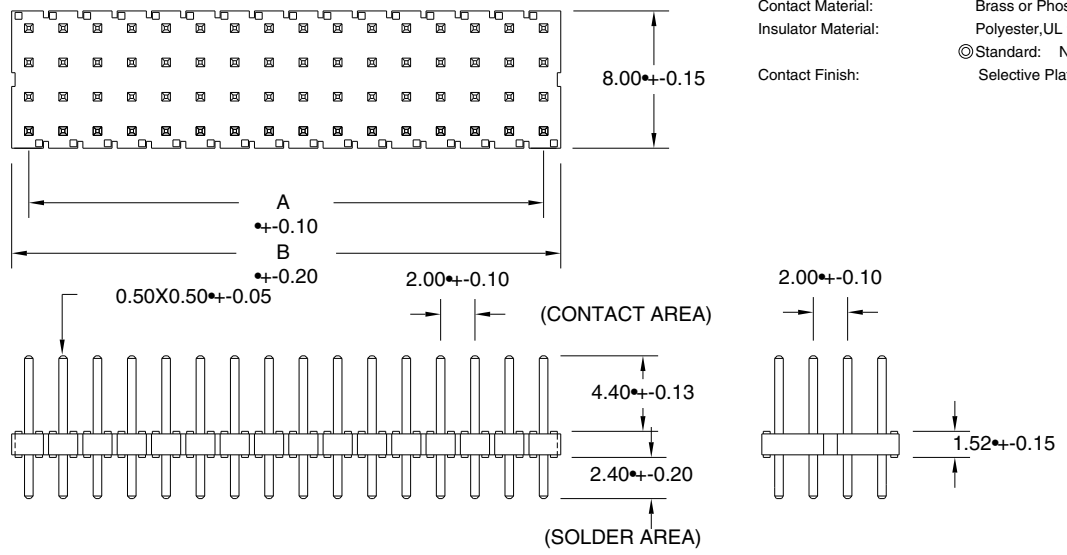

SULLINS
 801 E. MISSION RD.
 SAN MARCOS, CA 92069

GENERAL TOLERANCE	
XX. ±	.XXX ±
X. ±	.XXX ±
.X ±	.10
.XX ±	.05

SCALE **3:1**
 UNIT **MM**
 SIZE **A4**

DRAWN
 CHECK
 APPROVE

DATE
 DATE
 DATE

DWG. NO. **T0019**
 PARTS NO. **PRPNxx4RCCN**

TITLE

REV.
 SHEET