


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.


CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001" [0.00254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:
MAXIMUM CURRENT: 6.1 AMPS WITH 77° TEMPERATURE RISE.
MAXIMUM VOLTAGE: 3.0 KV
MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:
HOOK FITS COMPONENTS UP TO $\phi 0.045$ " [1.14].
PIN PERMITS CONNECTION TO 0.025" [0.64] SQ. OR $\phi 0.030$ " [0.76] SOCKETS.

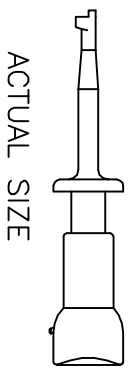

ACTUAL SIZE

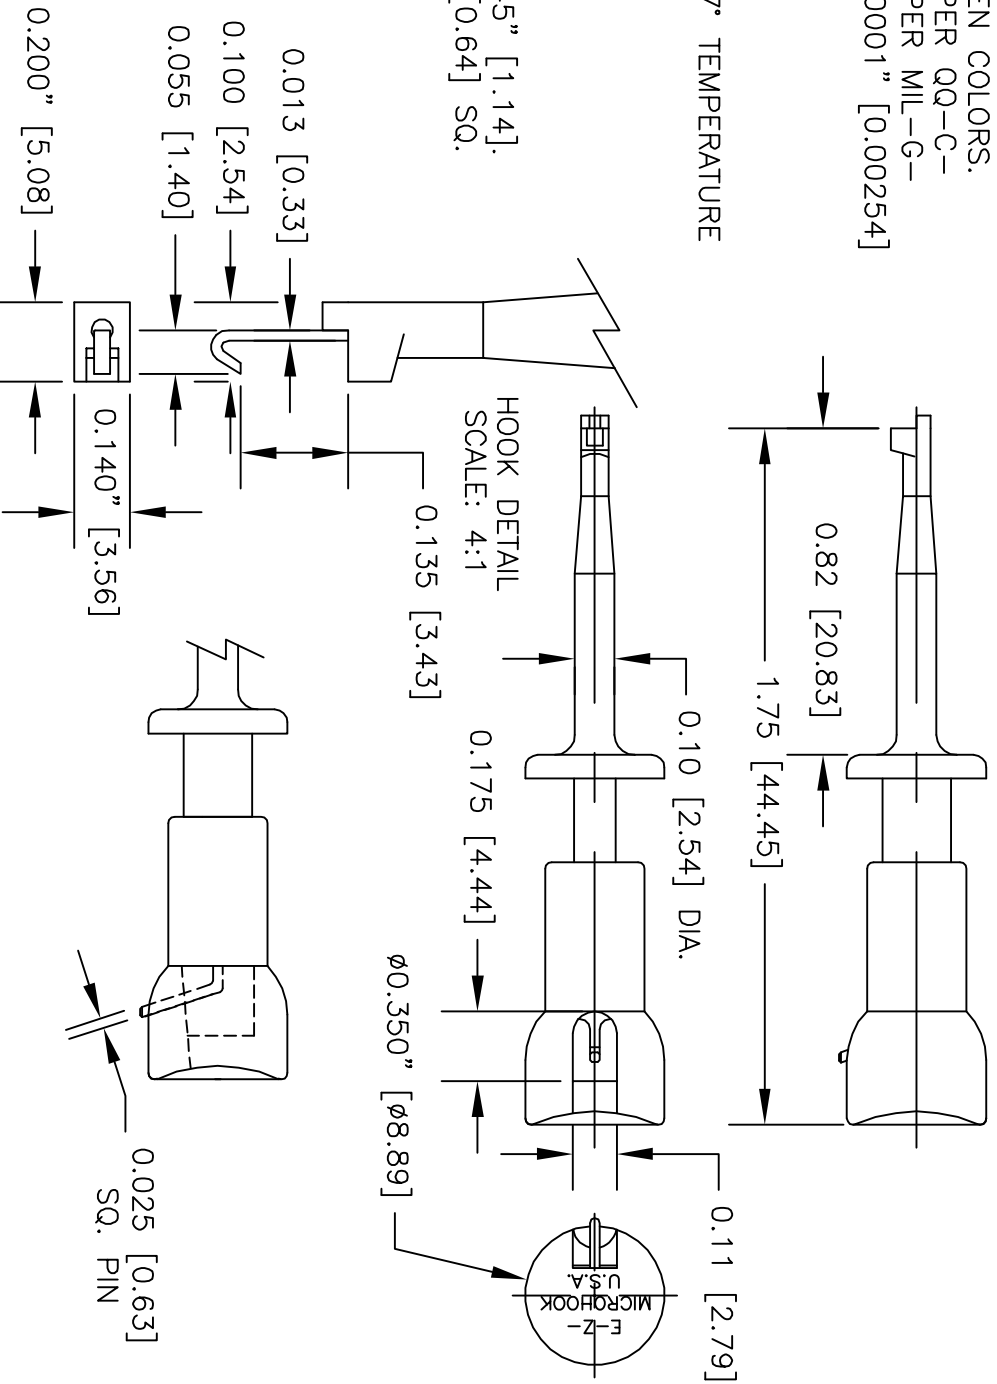

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	± .XXX ±	APPROVALS	DATE
DRAWN R.L.		6/09	
APPROVED BY			
MATERIAL SEE NOTE.		DESCRIPTION	
FINISH SEE NOTE.		E-Z-MICRO HOOK WITH SQUARE PIN	
NEXT ASSY USED ON		SIZE CODE IDENT NO. DRAWING NO.	
APPLICATION DO NOT SCALE DRAWING		A 08505 XM25COLOR	
		SCALE 2:1	
		SHEET 1 OF 1	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION: E-Z-MICRO HOOK WITH SQUARE PIN

SIZE CODE IDENT NO. DRAWING NO. A 08505 XM25COLOR

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED