
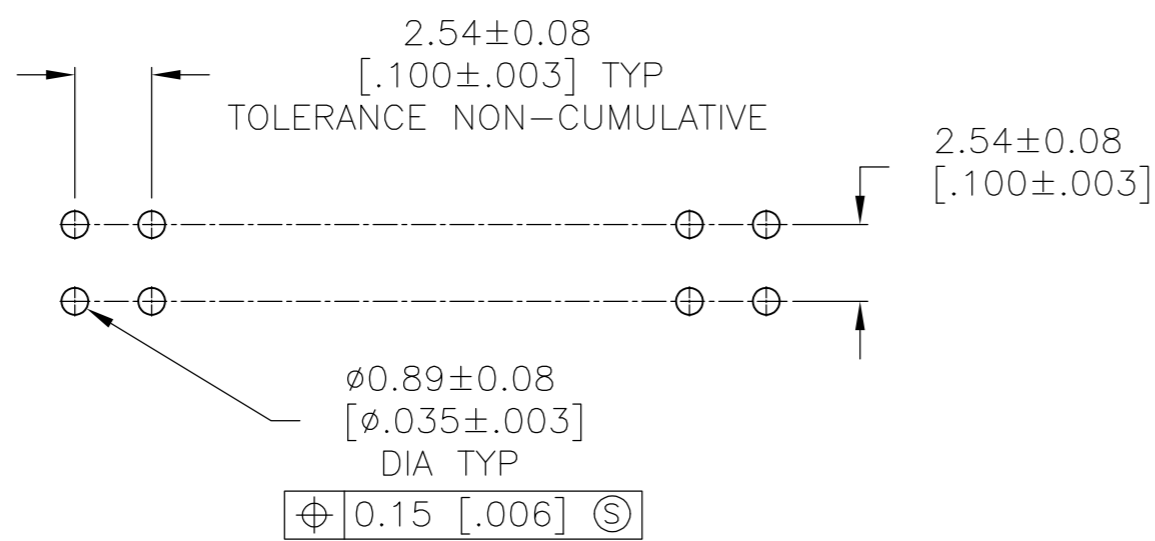


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
E		REVISED PER	ECO-14-000264	14JUL2014	NK	MM		

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 4 0.000762 [.000030] GOLD ON THE CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER 0.0012700 [.000050] NICKEL
- 5 HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK, POSTS: COPPER ALLOY.
- 6 PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 7 0.000762 [.000030] GOLD ON THE CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER 0.0012700 [.000050] NICKEL
- 8 HIGH TEMPERATURE CONFIGURATION
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

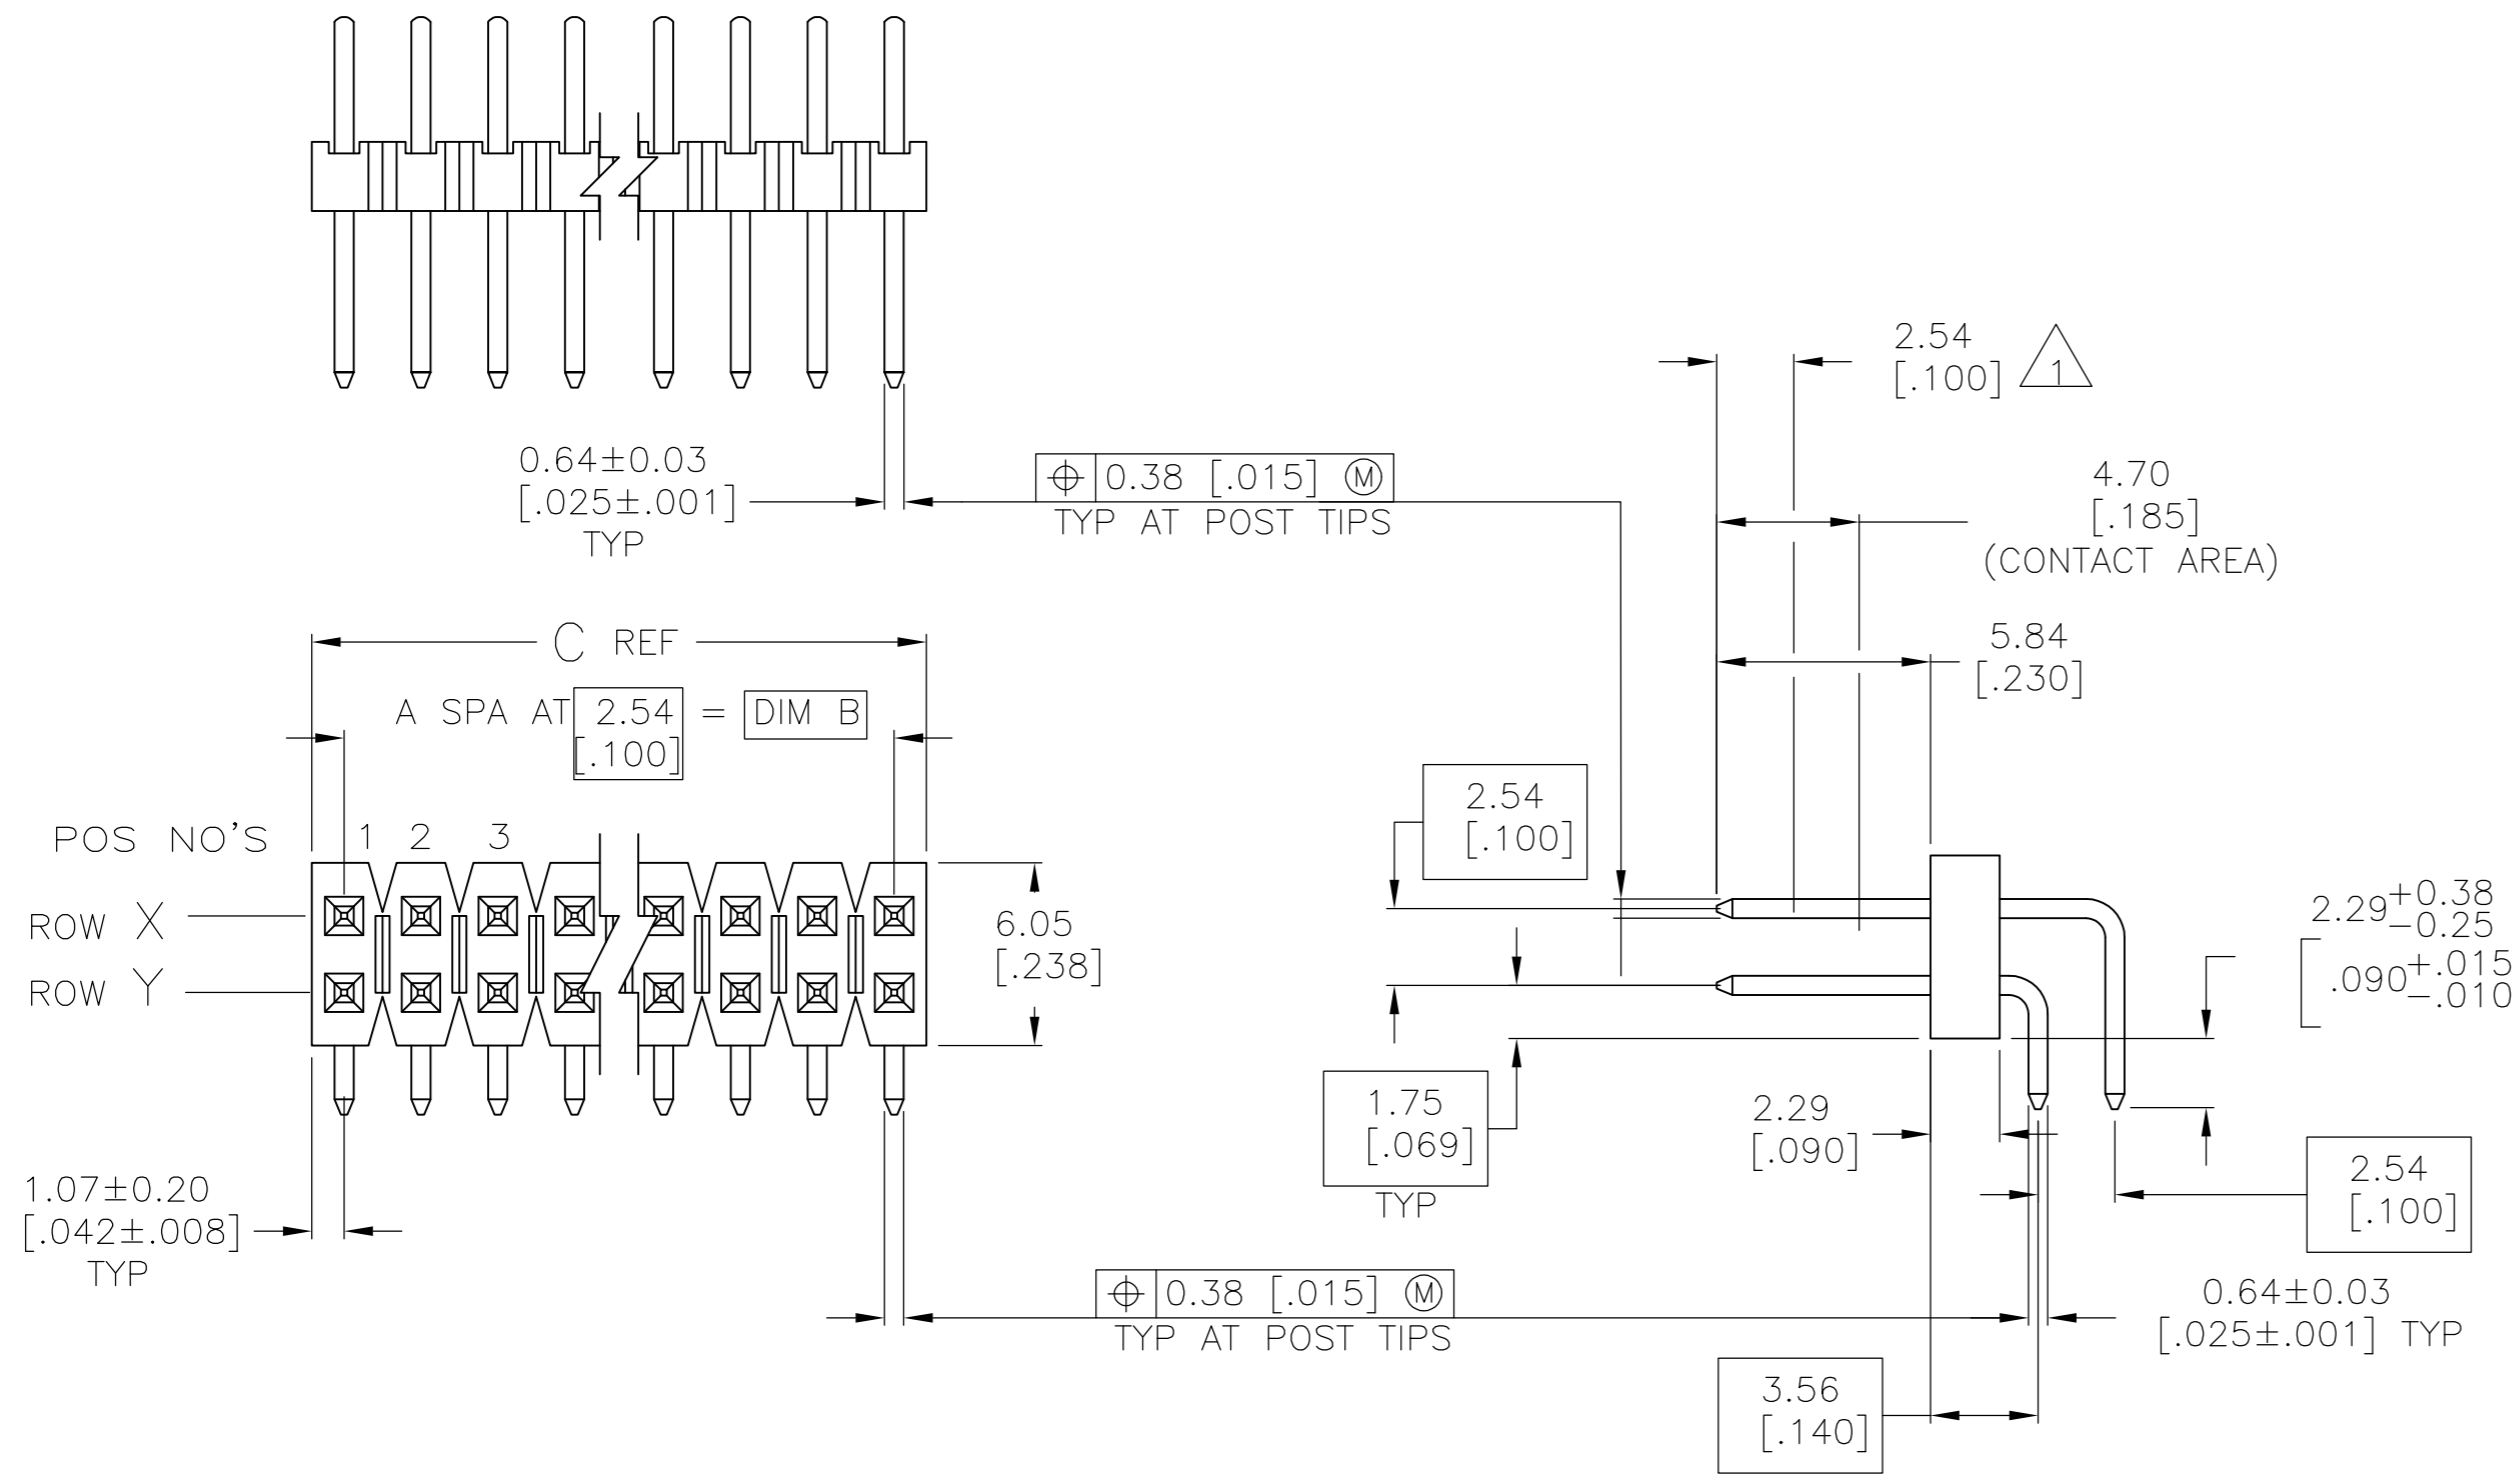

RECOMMENDED HOLE LAYOUT

REMARKS	PLATING	ROW Y	ROW X	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	
9 OBSOLETE	8	7	14	14	63.09 [2.484]	60.96 [2.400]	24	50	5-147067-1
6	4	4	2	-	30.07 [1.184]	27.94 [1.100]	11	24	147067-4
6	4	4	-	2	12.29 [.484]	10.16 [.400]	4	10	147067-3
6	4	4	1	-	12.29 [.484]	10.16 [.400]	4	10	147067-2
	4	4	14	14	63.09 [2.484]	60.96 [2.400]	24	50	147067-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: B. HAYMAKER 29JUN98
 CHK: J. GESFORD 29JUN98
 APVD: J. GESFORD 29JUN98

TE Connectivity

ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 CL, WITH .025 SQUARE POSTS, SELECT LOAD

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 147067 RESTRICTED TO: -

MATERIAL: 5 FINISH: SEE TABLE WEIGHT: - SCALE: 4:1 SHEET: 1 OF 1 REV: E