
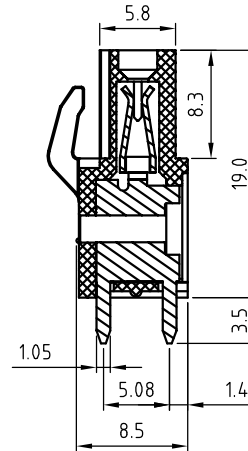
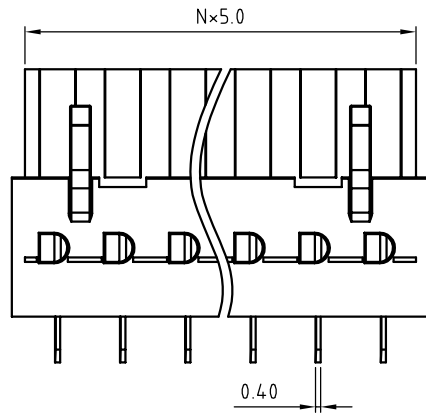


| | | | |
|---|------|-------------|----------|
| SIGN | DATE | DESCRIPTION | APPROVER |
| | | | |
| <i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i> | | | |

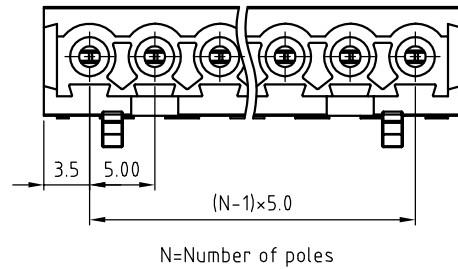

Material

- Wire guard: PhBz(CuSn)
- Surface of solder fail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C ± 10°C / 5 Sec


RoHS Compliant

PART NUMBER:

OSTV7XX7150

| | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Pole | 0: Black |
| 03 3 Pole | 5: Green (Standard) |
| | 6: Blue |
| 24 24 Pole | 8: Light Grey |

P.C.B LAYOUT

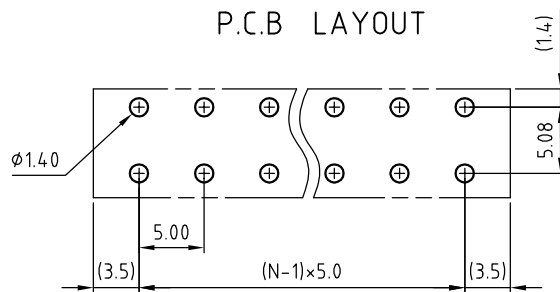

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



| | | | | | | |
|-----------------------|-----------------------|---|---------------------|----------|--------------|-------------|
| TITLE | | OSTV7 5.0mm Series 180° Vertical 2P-24P | | | | |
| PART NO. | OSTV7XX7150 | DWG NO. | OSTV7XX7151.DWG | | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | Tolerance | |
| Shi Jun 2006.11.10 | Shi Jun 2006.11.10 | Tason 2006.03.04 | Tason 2006.03.04 | | X. ±0.5 | X.X ±0.3 |
| | | | | | UNIT: mm | X.XX ±0.1 |
| | | | | | SHEET: 01/01 | SCALE: NONE |
| | | | | REV: B | | |