

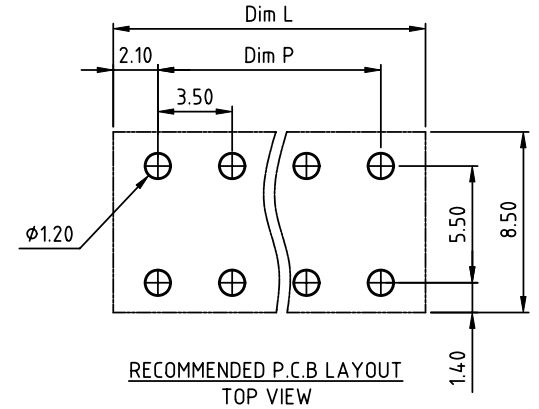
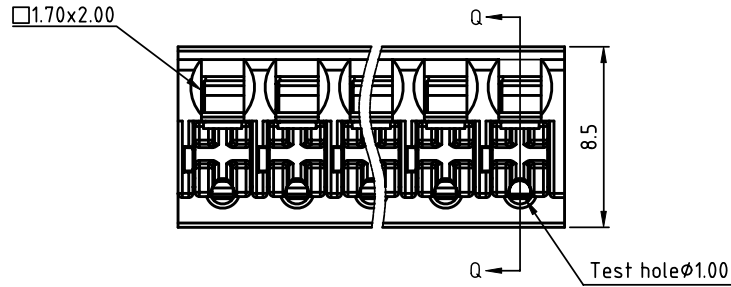


PRODUCT NUMBER	PITCH
NMxx100000JOG	3.50mm

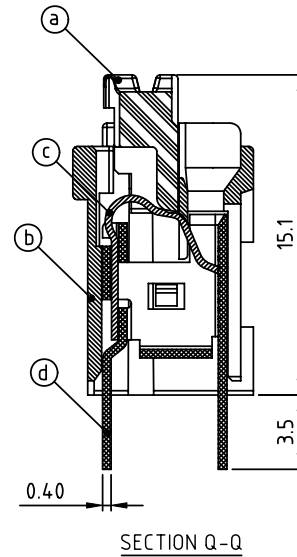

The color of lever is consistent with body's

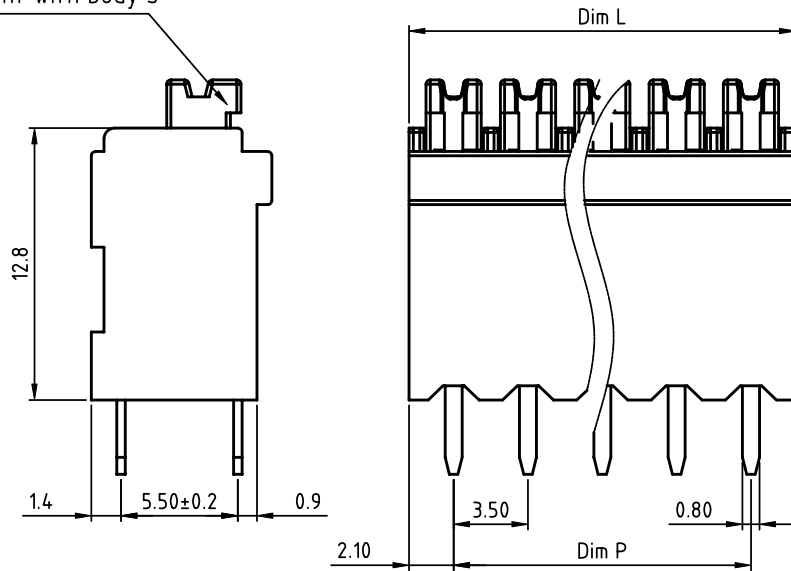

Material:

- Item (a) Lever: Thermoplastic (UL94V-0)
- Item (b) Terminal housing: Thermoplastic (UL94V-0)
- Item (c) Spring clamp: Stainless steel
- Item (d) Solder Pin: Brass. Tin plated

Electrical:

- Voltage rating: 300 V
- Current rating (SOL): 7 A
- Current rating (STR): 10 A
- Wire range:
- Solid wire (AWG): 18-24
- Stranded wire (AWG): 16-22
- Wire strip length: 12-13 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +110°C
- Reflow Soldering temperature: 260°C/10 Sec max
- Safety Approval:

N=Number of poles  
 Dim L=N×3.5+0.70  
 Dim P=(N-1)×3.5

Poles	Tolerance
2-6p	±0.15
7-12p	±0.20
13-18p	±0.30
19-24p	±0.40

PART NO.: **NM xx 10 0 0 00J0 G**

End stackable  
 No. of poles  
 02 2 poles  
 03 3 poles  
 ... ..  
 24 24 poles

RoHS compliant  
 (lead<4%)  
 In copper Alloy

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK
ltr	ecn no	dr	date		title TERMINAL BLOCK SPRING CLAMP, 90D WIRE INLET, THR
tolerances unless otherwise specified					
angles		φ		scale	dwg no NMxx100000JOG
X°±1'		X.XX±0.1			
dr	ENGR	ENGR	APPD		size A4
	EVIN ZHONG	EVIN ZHONG	SHI JUN		CUSTOMER Drawing
	060614	060614	060614		
	HANKE FENG	HANKE FENG	060614		
sheet index	revision sheet	A 1			