

## Surge protection plug - PT 3-PB-ST - 2858030

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Surge protection plug for the base element, normal mode voltage coarse and fine protection for two floating signal wires in IT, common mode voltage coarse protection to ground.

### Why buy this product

- ✓ Plugs can be checked with CHECKMASTER
- ✓ Maximum ease of maintenance thanks to the two-piece design
- ✓ Base element remains an integral part of the installation
- ✓ Protection for fieldbus systems, PROFIBUS, and signal circuits with 3 to 5-wire technology
- ✓ Consistent plug-in signal circuit protection
- ✓ Impedance-neutral disconnection of plug for test and maintenance purposes



### Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 878030
GTIN	4017918878030

### Technical data

#### Dimensions

Height	45 mm
Width	17.7 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module height	90 mm
Complete module width	17.7 mm
Complete module depth	65.5 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

# Surge protection plug - PT 3-PB-ST - 2858030

## Technical data

### Ambient conditions

Altitude	max. 2000 m
Degree of protection	IP20

### General

Housing material	PA
Flammability rating according to UL 94	V-0
Color	black
Standards for clearances and creepage distances	DIN EN 61664-1
	IEC 60664-1
Mounting type	on base element
Type	Male
Number of positions	2
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.10

### Protective circuit

IEC test classification	C1
	C2
	C3
	D1
VDE requirement class	C1
	C2
	C3
	D1
Nominal voltage $U_N$	5 V DC
Maximum continuous voltage $U_C$	5.2 V DC
	3.6 V AC
Rated current	450 mA (45°C)
Operating effective current $I_C$ at $U_C$	$\leq 300 \mu A$
Residual current $I_{PE}$	$\leq 300 \mu A$ (with PT 1X2-BE)
	$\leq 1 \mu A$ (with PT 1X2+F-BE)
Nominal discharge current $I_n$ (8/20) $\mu s$ (line-line)	10 kA
Nominal discharge current $I_n$ (8/20) $\mu s$ (line-earth)	10 kA
Pulse discharge current $I_{imp}$ (10/350) $\mu s$	2.5 kA
Total discharge current $I_{total}$ (8/20) $\mu s$	20 kA
Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (line-line)	10 kA
Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (line-earth)	10 kA
Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (line-line)	90 A
Output voltage limitation at 1 kV/ $\mu s$ (line-line) spike	$\leq 55 V$
Output voltage limitation at 1 kV/ $\mu s$ (line-earth) spike	$\leq 55 V$ (with PT 1X2-BE)
	$\leq 700 V$ (with PT 1X2+F-BE)

## Surge protection plug - PT 3-PB-ST - 2858030

### Technical data

#### Protective circuit

Output voltage limitation at 1 kV/μs (line-line) static	≤ 15 V
Output voltage limitation at 1 kV/μs (line-earth) static	≤ 15 V
	≤ 30 V (with PT 1X2+F-BE)
Residual voltage at I <sub>n</sub> (line-line)	≤ 15 V
Residual voltage at I <sub>n</sub> (line-earth)	≤ 30 V (with PT 1X2-BE)
Residual voltage at I <sub>n</sub> (line-signalground)	≤ 15 V (with PT 1X2-BE)
Residual voltage with I <sub>an</sub> (10/1000) μs (line-line)	≤ 15 V
Residual voltage with I <sub>an</sub> (10/1000) μs (line-signalground)	≤ 15 V
Voltage protection level U <sub>p</sub> (line-line)	≤ 70 V (C1 - 1 kV/500 A)
	≤ 45 V (C3 - 25 A)
	≤ 100 V (C2 - 10 kV / 5 kA)
	≤ 70 V (6 kV / 3 kA)
Voltage protection level U <sub>p</sub> (line-earth)	≤ 80 V (C1 - 1 kV/500 A)
	≤ 110 V (C2 - 10 kV / 5 kA)
	≤ 100 V (6 kV / 3 kA)
	≤ 45 V (C3 - 25 A)
Voltage protection level U <sub>p</sub> (line-signalground)	≤ 45 V (C3 - 25 A)
Response time t <sub>A</sub> (line-line)	≤ 500 ns
Response time t <sub>A</sub> (line-signalground)	≤ 500 ns
Response time t <sub>A</sub> (line-earth)	≤ 500 ns
Input attenuation aE, sym.	typ. 0.3 dB (≤ 5 MHz / 100 Ω)
Cut-off frequency f <sub>g</sub> (3 dB), sym. in 100 Ohm system	typ. 60 MHz
Capacity (line-line)	typ. 30 pF
Resistance in series	2.2 Ω ±10 % (7-8/11-12)
Max. required back-up fuse	500 mA (T)
Impulse durability (line-line)	C2 - 10 kV/5 kA
	C3 (90 A)
Impulse durability (line-earth)	C2 - 10 kV/5 kA
	C3 (90 A)
	D1 - 2.5 kA

#### Connection data

Connection method	Screw connection (in connection with the base element)
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

#### Connection, equipotential bonding

# Surge protection plug - PT 3-PB-ST - 2858030

## Technical data

### Connection, equipotential bonding


Stripping length	8 mm
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

### Standards and Regulations


Standards/specifications	EN 61643-21/A1 2009
	IEC 61643-21/A1 2008

## Drawings

Dimensional drawing

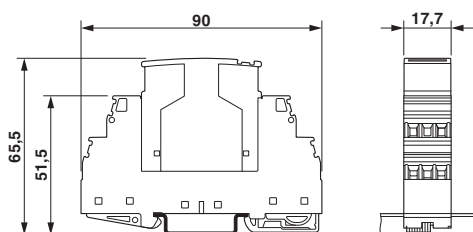

Circuit diagram

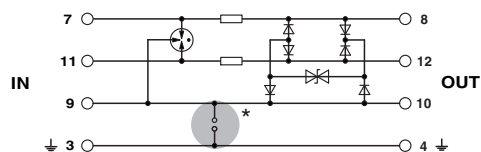

The figure shows the complete module consisting of a base element and connector

## Approvals

### Approvals

#### Approvals

UL Listed / EAC / EAC / DNV GL

#### Ex Approvals

### Approval details

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 138168
-----------	--	---	---------------

## Surge protection plug - PT 3-PB-ST - 2858030

### Approvals

EAC		EAC-Zulassung
-----	---	---------------

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

DNV GL	<a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>	TAE00001N6
--------	---	------------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>