

ATC 800 B Series NPO Ceramic, High RF Power Ultra-Low ESR Multilayer Capacitors

- Case B Size (.110" x .110")
- Rugged, reliable NPO dielectric
- Case optimized for highest self resonant frequency
- Capacitance Range 0.1 pF to 1000 pF
- Lowest ESR
- Capable of highest RF Power
- RoHS Compliant / Lead-Free

ATC's 800 B Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance insure that the 800 B Series products are your best choice for high RF power applications from VHF through microwave frequencies.

Typical applications: VHF / UHF / HDTV Broadcast Transmitters, Wireless Communications, Public Safety Radio, Avionics, Telecom, WiMAX, Microwave Communication Systems and Satellite Systems.

Typical circuit applications: High RF Power Filter Networks, Combiners, Couplers, Matching Networks, Output Coupling, Antenna Coupling, and DC Blocking and Bypassing.

ENVIRONMENTAL TESTS

ATC 800 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

MOISTURE RESISTANCE:


MIL-STD-202, Method 106

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C
200% WVDC applied

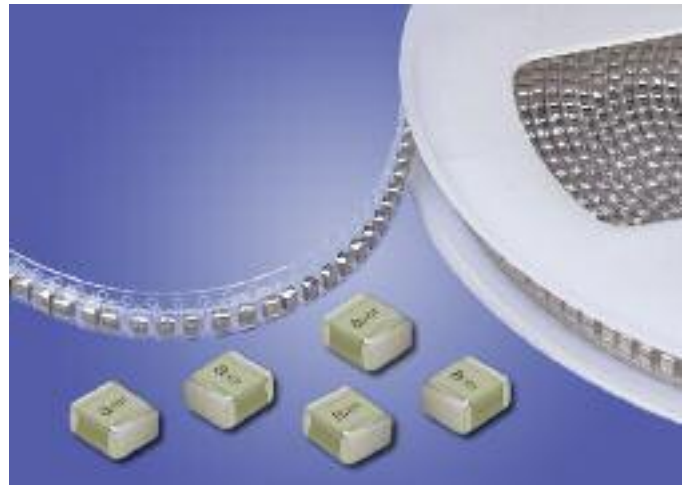

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): > 2000 @ 1 MHz

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):
0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

0.1 pF to 1000 pF:

10⁵ Megohms min. @ +25°C at rated WVDC

10⁴ Megohms min. @ +125°C at rated WVDC

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case B: 250% of rated WVDC for 5 secs

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure)

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage)

TERMINATION STYLES: RoHS Compliant and Solder Plate

See Mechanical Configurations, page 3

TERMINAL STRENGTH: Terminations for chips withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



A M E R I C A N

ATC North America

+1-631-622-4700

sales@atceramics.com

T E C H N I C A L

ATC Europe

+46 8 6800410

sales@atceramics-europe.com

C E R A M I C S

ATC Asia

+86-755-2396-8759

sales@atceramics-asia.com



www.atceramics.com

ATC # 001-1033 Rev. H 10/10


ATC 800 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC					
0R1	0.1	B	500	2R4	2.4	B, C, D	500	200	20	F, G, J, K, M	500	151	150	F, G, J, K, M	300					
0R2	0.2	B, C		2R7	2.7			220	22			161	160							
0R3	0.3			3R0	3.0			240	24			181	180							
0R4	0.4	3R3		3.3	270			27	201			200								
0R5	0.5	B, C, D		3R6	3.6			300	30			221	220			50	241	240	F, G, J, K, M	200
0R6	0.6			3R9	3.9			330	33			271	270							
0R7	0.7			4R3	4.3			360	36			301	300							
0R8	0.8			4R7	4.7			390	39			331	330							
0R9	0.9			5R1	5.1			430	43			361	360							
1R0	1.0			5R6	5.6			470	47			391	390							
1R1	1.1		6R2	6.2	510	51	431	430												
1R2	1.2		6R8	6.8	560	56	471	470												
1R3	1.3		B, C, J, K, M	7R5	7.5	620	62	511	510	300	561	560	F, G, J, K, M	100						
1R4	1.4			8R2	8.2	680	68	621	620											
1R5	1.5	9R1		9.1	750	75	681	680												
1R6	1.6	100		10	820	82	751	750												
1R7	1.7	110		11	910	91	821	820												
1R8	1.8	120		12	101	100	911	910												
1R9	1.9	130		13	111	110	102	1000												
2R0	2.0	150		15	121	120														
2R1	2.1	160		16	131	130														
2R2	2.2	180		18																

VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

ATC PART NUMBER CODE

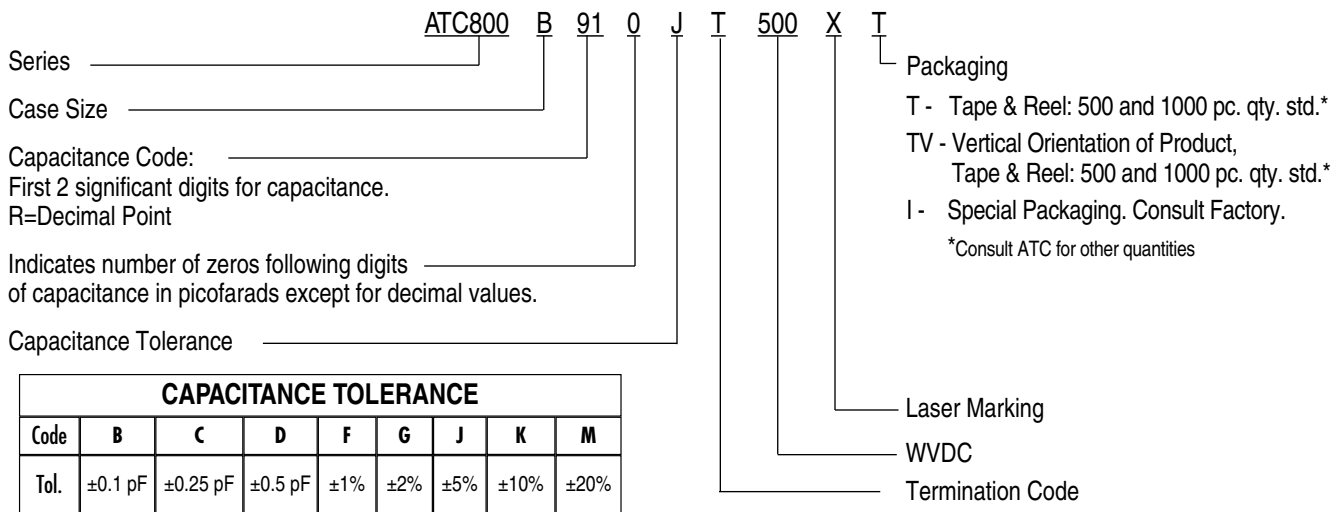

The above part number refers to a 800 B Series (case size B) 91 pF capacitor, J tolerance (±5%), 500 WVDC, with T termination (Tin Plated over Nickel Barrier Termination, RoHS Compliant), laser marking and tape and reel packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.
Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America **ATC Europe** **ATC Asia**
 +1-631-622-4700 sales@atceramics.com +46 8 6800410 sales@atceramics-europe.com 86-755-2396-8759 sales@atceramics-asia.com

ATC 800 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	T	B Solderable Nickel Barrier		.110 +.020 -.010 (2.79 +0.51 -.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	RoHS Compliant Tin Plated over Nickel Barrier Termination
800B	W	B Solder Plate		.110 +.020 -.010 (2.79 +0.51 -.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	Tin/Lead Solder Plated over Nickel Barrier Termination

ATC 800 B Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	TN	B Non-Mag Solderable Barrier		.110 +.020 -.010 (2.79 +0.51 -.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination

Suggested Mounting Pad Dimensions

Case B Vertical Mount

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.090 (2.29)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.070 (1.78)	.030 (.762)	.075 (1.91)	.135 (3.43)

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case B Horizontal Mount

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.130 (3.30)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.110 (2.79)	.030 (.762)	.075 (1.91)	.135 (3.43)

inches (mm)

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2006 American Technical Ceramics Corp. All Rights Reserved

ATC # 001-1033 Rev. H 10/10



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700 sales@atceramics.com

ATC Europe
+46 8 6800410 sales@atceramics-europe.com

ATC Asia
86-755-2396-8759 sales@atceramics-asia.com

ATC 800 B Performance Data

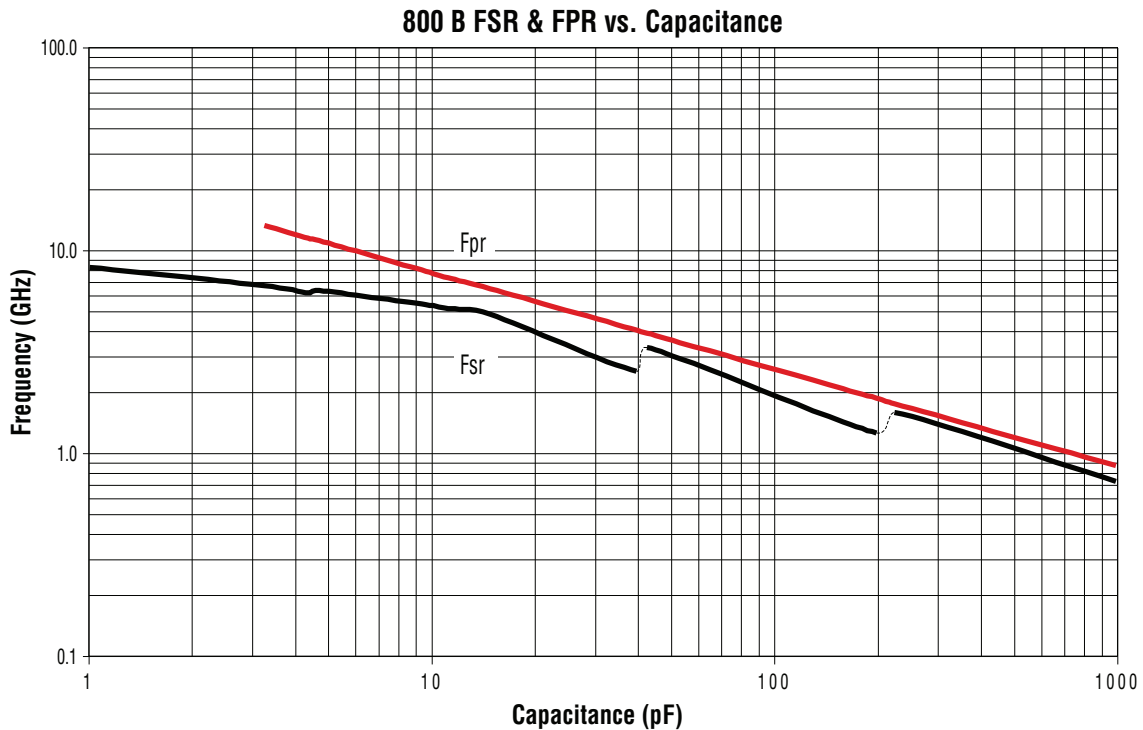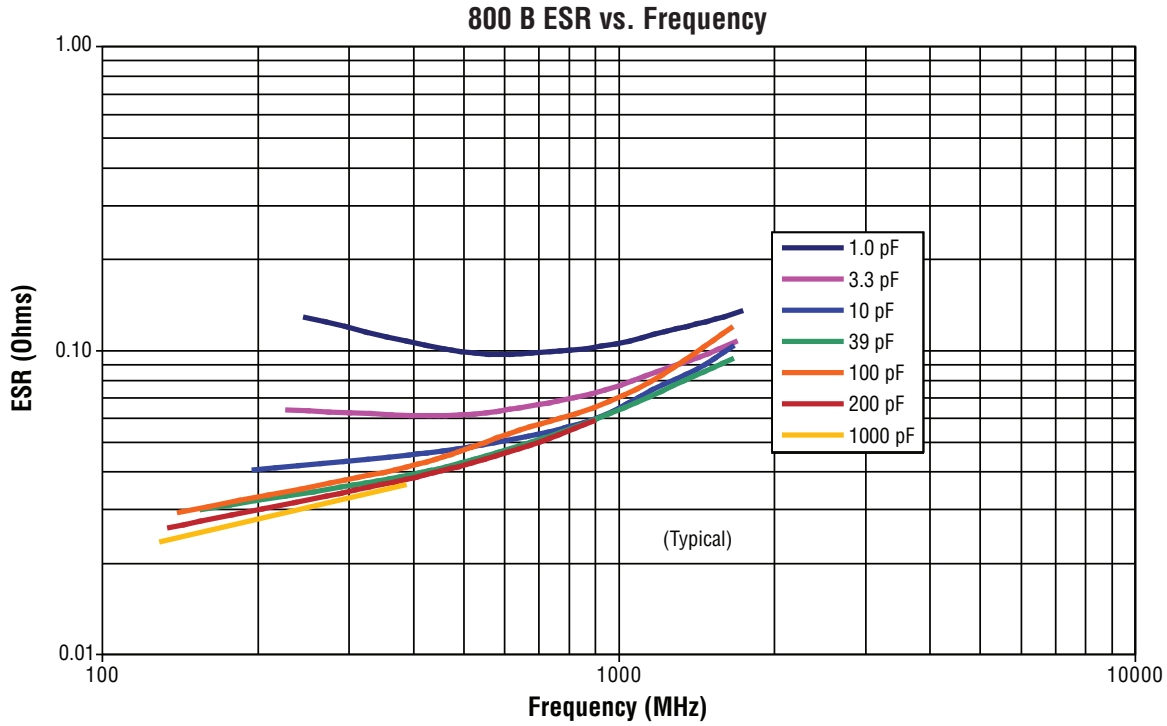

ATC 800 B Series Data Sheet Test Condition Description

Capacitors vertically mounted in series microstrip configuration on 23.3-mil thick Rogers RO4350[®] softboard, 52-mils wide 1/2 oz. Cu traces.

FSR = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.

FPR = lowest frequency at which there is a notch in S21 magnitude response.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700 sales@atceramics.com

ATC Europe
+46 8 6800410 sales@atceramics-europe.com

ATC Asia
86-755-2396-8759 sales@atceramics-asia.com