

### TO-92S



#### Pin Definition:

1. V<sub>CC</sub>
2. GND
3. Output

### SOT-23



#### Pin Definition:

1. V<sub>CC</sub>
2. Output
3. GND

## Description

TSH190, Hall-Effect sensor, designed for electronic commutation of brush-less DC motor applications. The device includes an on-chip Hall voltage generator for magnetic sensing, a comparator that amplifies the Hall Voltage, and a Schmitt trigger to provide switching hysteresis for noise rejection, open collector output. An internal band gap regulator is used to provide temperature compensated supply voltage for internal circuits and allows a wide operating supply range. The device is identical except for magnetic switch points. A south pole of sufficient strength will turn the output on. The North Pole is necessary to turn the output off. An on-board regulator permits operation with supply voltages of 4V to 30 V.

## Features

- Optimized for BLDC motor applications
- High Peak Voltage of 65V
- 100% tested at 125°C
- Temperature compensation function

## Ordering Information

| Part No.     | Package | Packing          |
|--------------|---------|------------------|
| TSH190CT B0G | TO-92S  | 1Kpcs / Bulk Bag |
| TSH190CX RFG | SOT-23  | 3Kpcs / 7" Reel  |

**Note:** "G" denote for Halogen Free Product

## Application


- High temperature Fan motor
- 3 phase BLDC motor application
- Fan motor application
- Speed sensing
- Revolution counting
- E-Bike

## Absolute Maximum Rating (T<sub>a</sub> = 25°C unless otherwise noted)


| Characteristics                          | Limit               | Value           | Unit  |
|--|---------------------|-----------------|-------|
| Supply voltage                           | V <sub>CC</sub>     | 65              | V     |
| Output Voltage                           | V <sub>OUT</sub>    | 65              | V     |
| Reverse voltage                          | V <sub>CC/OUT</sub> | -32             | V     |
| Magnetic flux density                    |                     | Unlimited       | Gauss |
| Output current                           | I <sub>OUT</sub>    | 25              | mA    |
| Operating Temperature Range              | T <sub>OPR</sub>    | -40 to +125     | °C    |
| Storage temperature range                | T <sub>STG</sub>    | -55 to +150     | °C    |
| Maximum Junction Temp                    | T <sub>J</sub>      | 150             | °C    |
| Thermal Resistance - Junction to Ambient | TO-92S              | θ <sub>JA</sub> | °C/W  |
|  | SOT-23              |                 |       |
| Thermal Resistance - Junction to Case    | TO-92S              | θ <sub>JC</sub> | °C/W  |
|  | SOT-23              |                 |       |
| Package Power Dissipation                | TO-92S              | P <sub>D</sub>  | mW    |
|  | SOT-23              |                 |       |

**Note:** Do not apply reverse voltage to V<sub>CC</sub> and V<sub>OUT</sub> Pin, It may be caused for Miss function or damaged device.

### Block Diagram

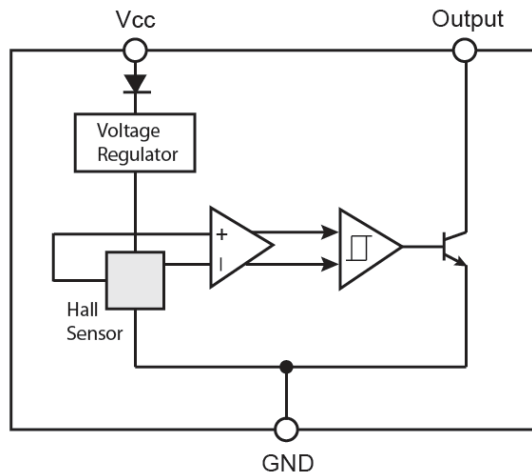

### Typical Application Circuit

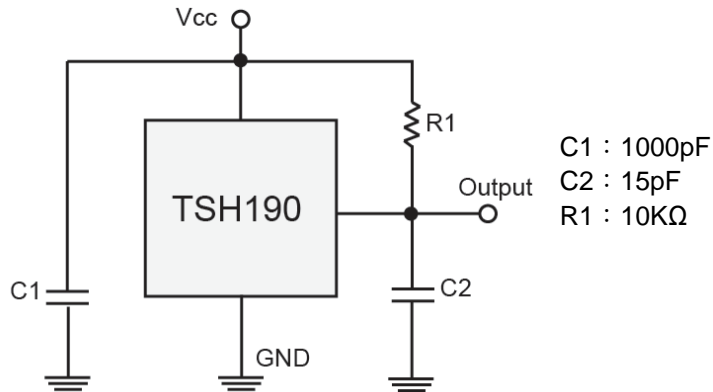

### Electrical Specifications (DC Operating Parameters : $T_A=+25^{\circ}\text{C}, V_{CC}=12\text{V}$ )

| Parameters                | Test Conditions                            | Min | Typ | Max | Units |
|---------------------------|--|-----|-----|-----|-------|
| Supply Voltage            | Operating                                  | 4   | --  | 30  | V     |
| Supply Current            | $B < B_{OP}$                               | --  | 3   | 8   | mA    |
| Output Saturation Voltage | $I_{OUT} = 5\text{mA}, B > B_{OP}$         | --  | --  | 500 | mV    |
| Output Leakage Current    | $I_{OFF} B < B_{RP}, V_{OUT} = 24\text{V}$ | --  | --  | 10  | uA    |
| Output Rise Time          | $R_L=820\Omega, C_L=20\text{pF}$           | --  | 1.5 | --  | uS    |
| Output Fall Time          | $R_L=820\Omega; C_L=20\text{pF}$           | --  | 1.5 | --  | uS    |

### Magnetic Specifications


| Parameters    | Test Conditions | Min  | Typ | Max | Units |
|---------------|-----------------|------|-----|-----|-------|
| Operate Point |                 | 10   | --  | 110 | Gauss |
| Release Point |                 | -110 | --  | -10 | Gauss |
| Hysteresis    |                 | --   | 100 | --  | Gauss |

Note: 1G (Gauss) = 0.1mT (millitesta)

### Output Behavior versus Magnetic Pole

DC Operating Parameters:  $T_A = -40$  to  $125^\circ\text{C}$ ,  $V_{CC} = 4$  to  $30\text{V}$

| Parameter  | Package | Test condition | OUT  |
|------------|---------|----------------|------|
| North pole | TO-92S  | $B > B_{OP}$   | Open |
| South pole | TO-92S  | $B < B_{RP}$   | Low  |
| North pole | SOT-23  | $B > B_{OP}$   | Low  |
| South pole | SOT-23  | $B < B_{RP}$   | Open |

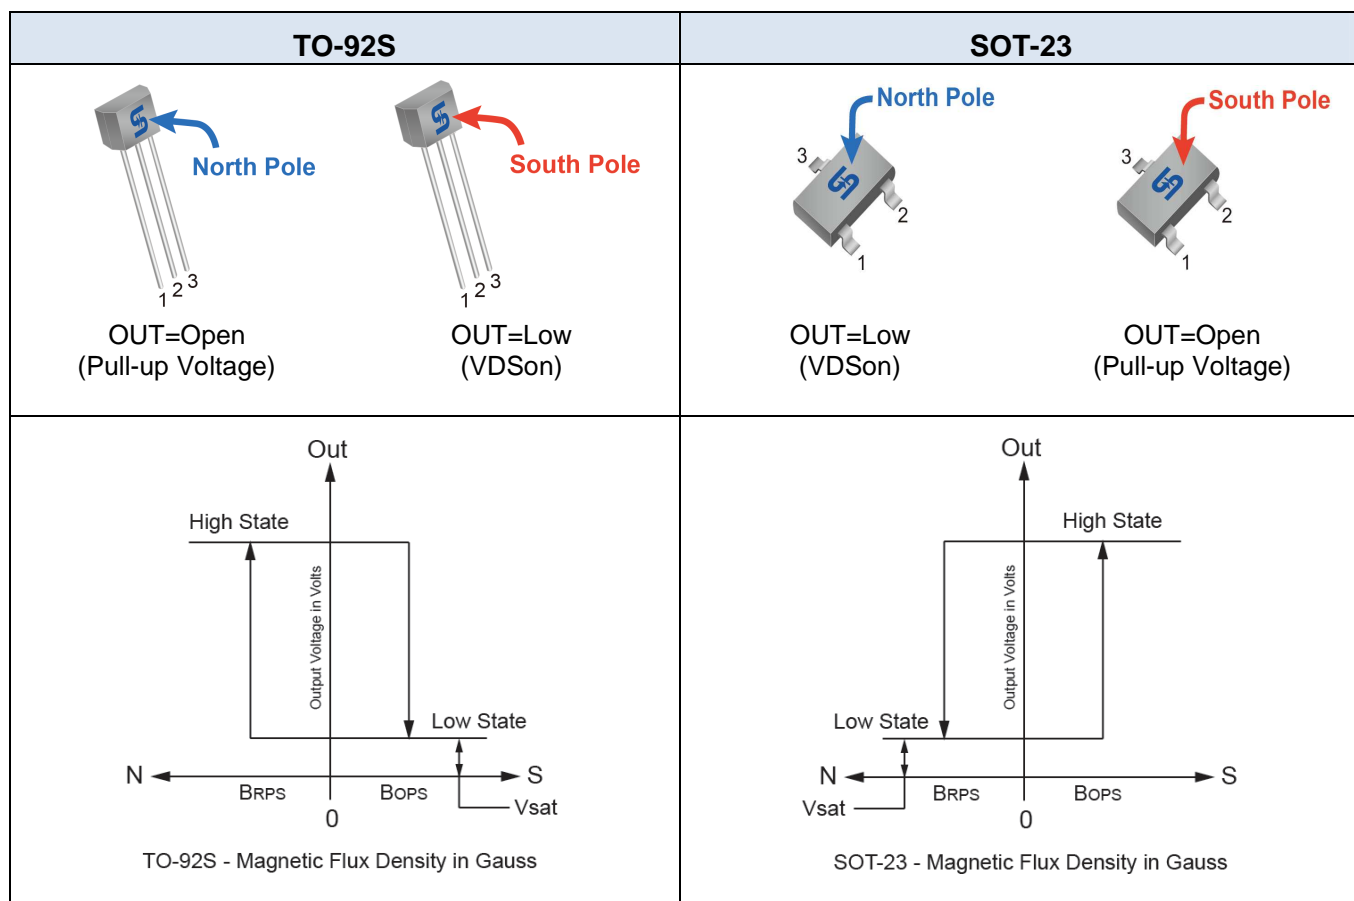

### Characteristic Performance

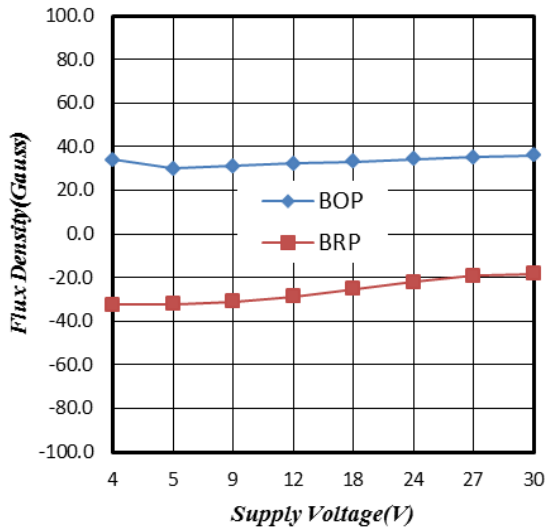


Figure 1. Supply Voltage vs. Flux Density

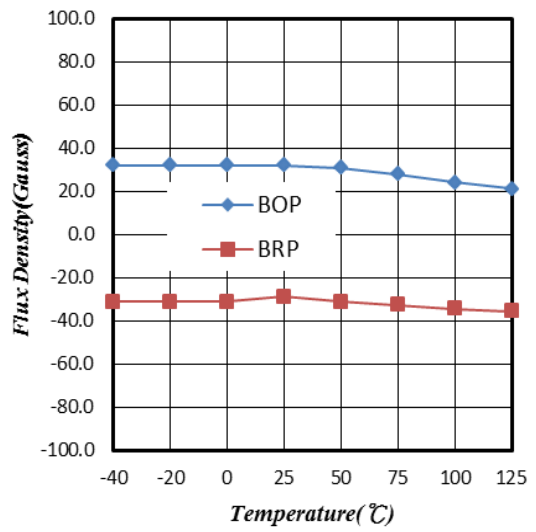


Figure 2. Temperature vs. Flux Density

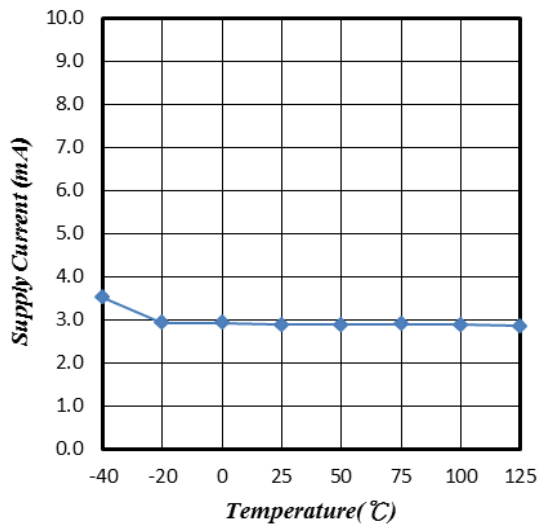


Figure 3. Supply Current vs. Temperature

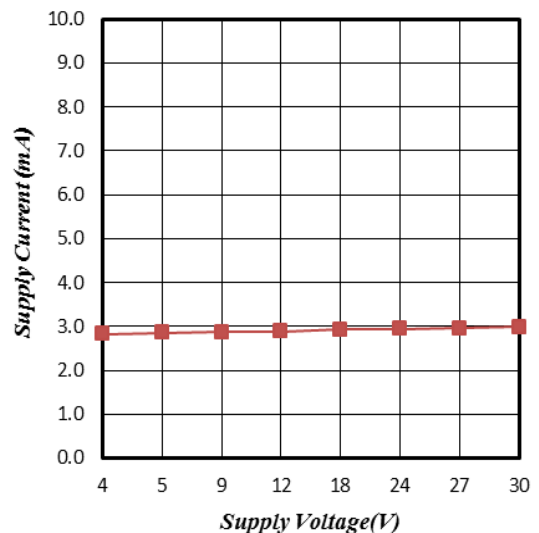


Figure 4. Supply Current vs. Supply Voltage

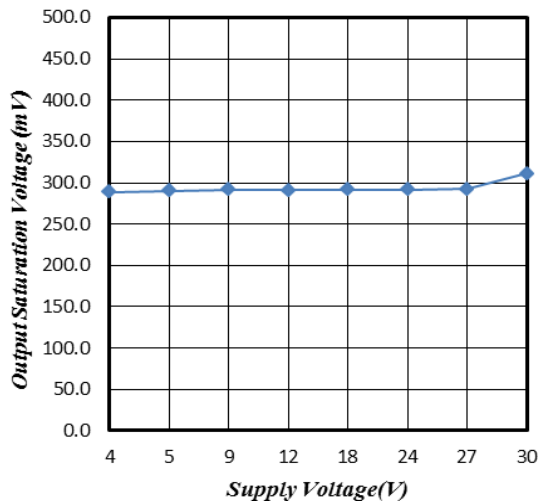


Figure 5. Supply Voltage vs. Saturation Voltage

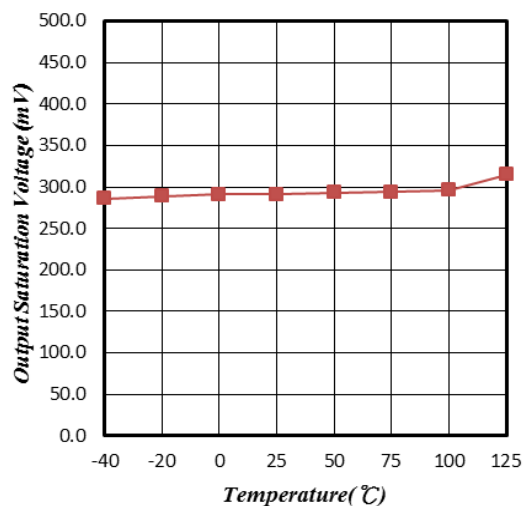


Figure 6. Saturation Voltage vs. Temperature

### Characteristic Performance

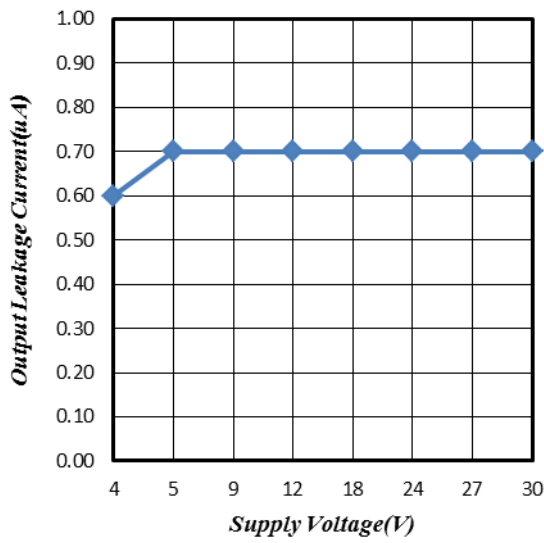


Figure 7. Supply Voltage vs. Leakage Current

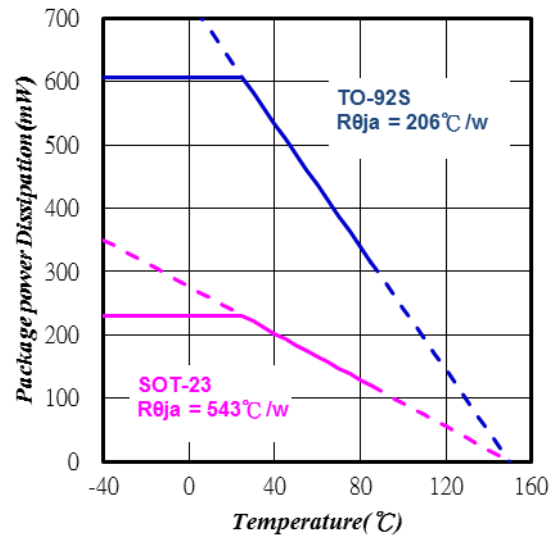



Figure 8. Temperature vs. Power Dissipation

**TO-92S Mechanical Drawing**




Unit: Millimeters

**Marking Diagram**




**190** = Device Code  
**Y** = Year Code  
**WW** = Week Code (01~52)

**SOT-23 Mechanical Drawing**

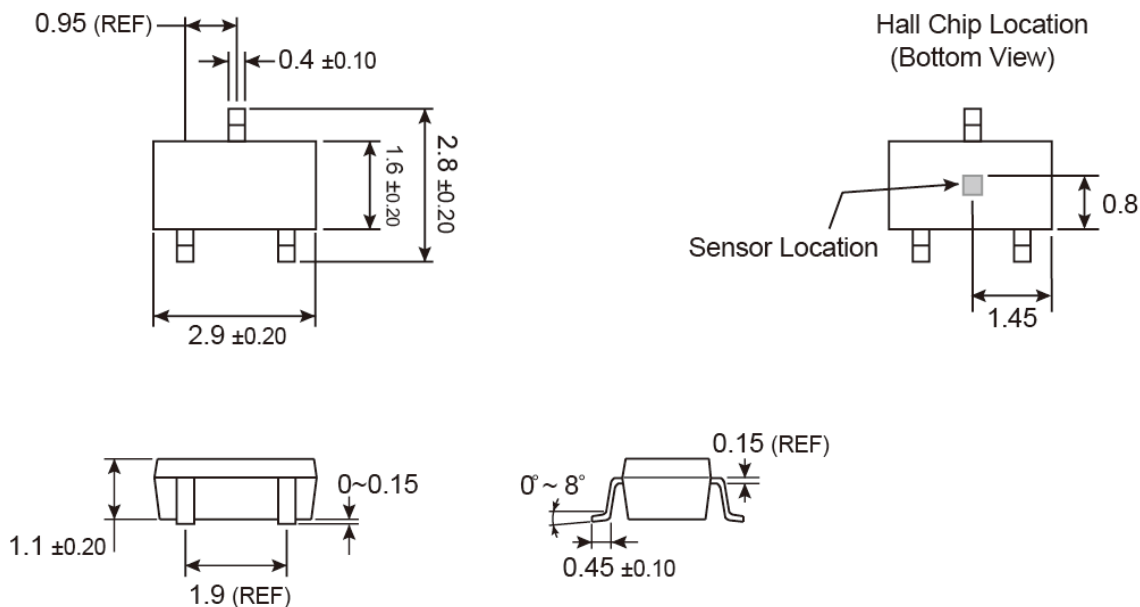

Unit: Millimeters

**Marking Diagram**



**190** = Device Code  
**WW** = Week Code Table

|      |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| week | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 |
| code | OA | OB | OC | OD | OE | OF | OG | OH | OI | OJ | OK | OL | OM |
| week | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| code | ON | OO | OP | OQ | OR | OS | OT | OU | OV | OW | OX | OY | OZ |
| week | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 |
| code | PA | PB | PC | PD | PE | PF | PG | PH | PI | PJ | PK | PL | PM |
| week | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 |
| code | PN | PO | PP | PQ | PR | PS | PT | PU | PV | PW | PX | PY | PZ |

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.