
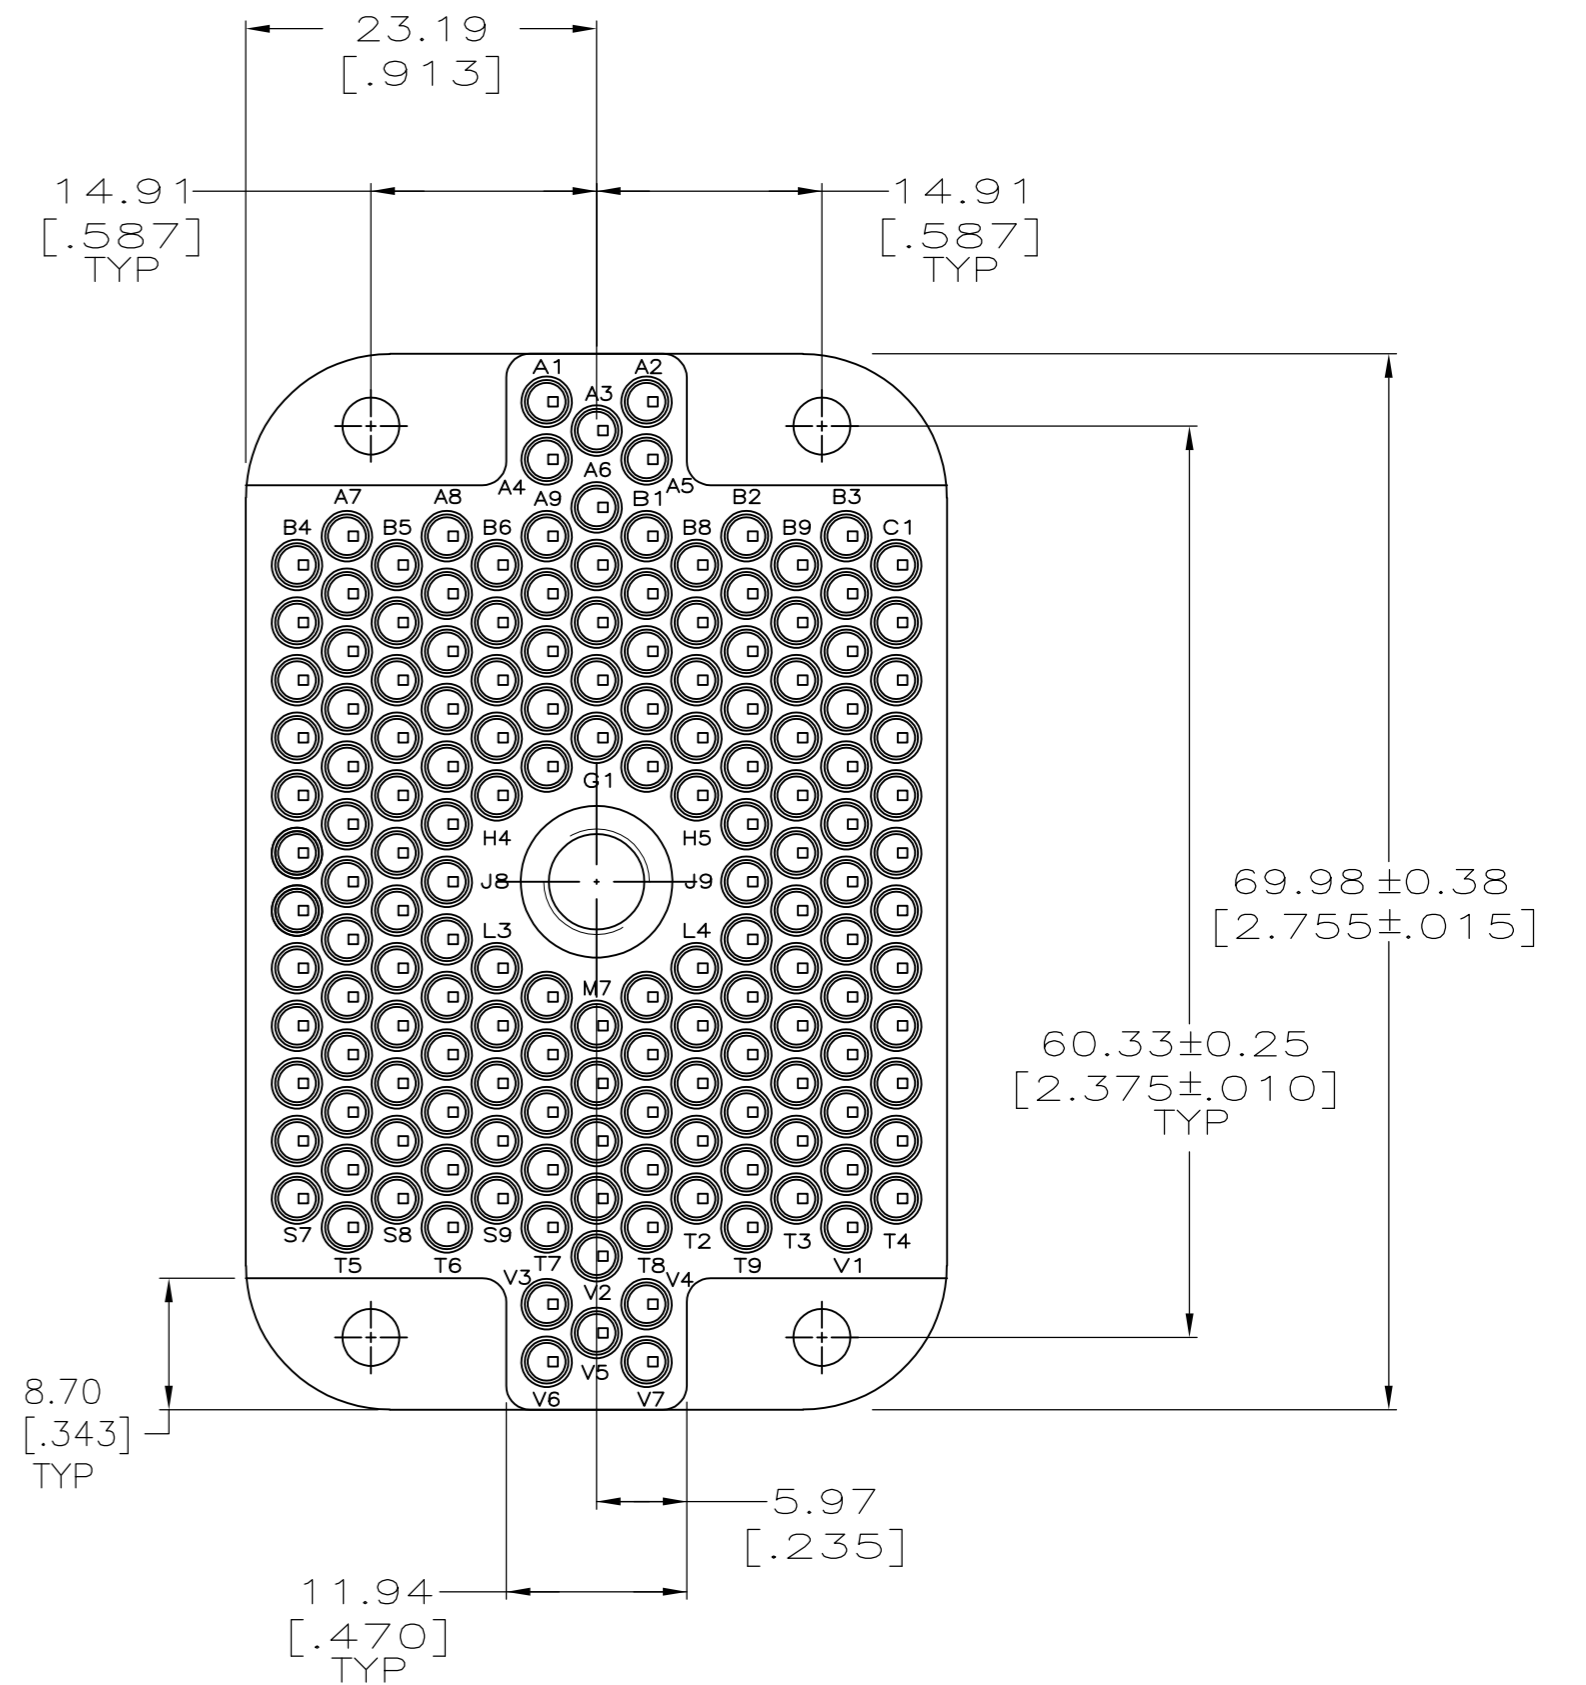
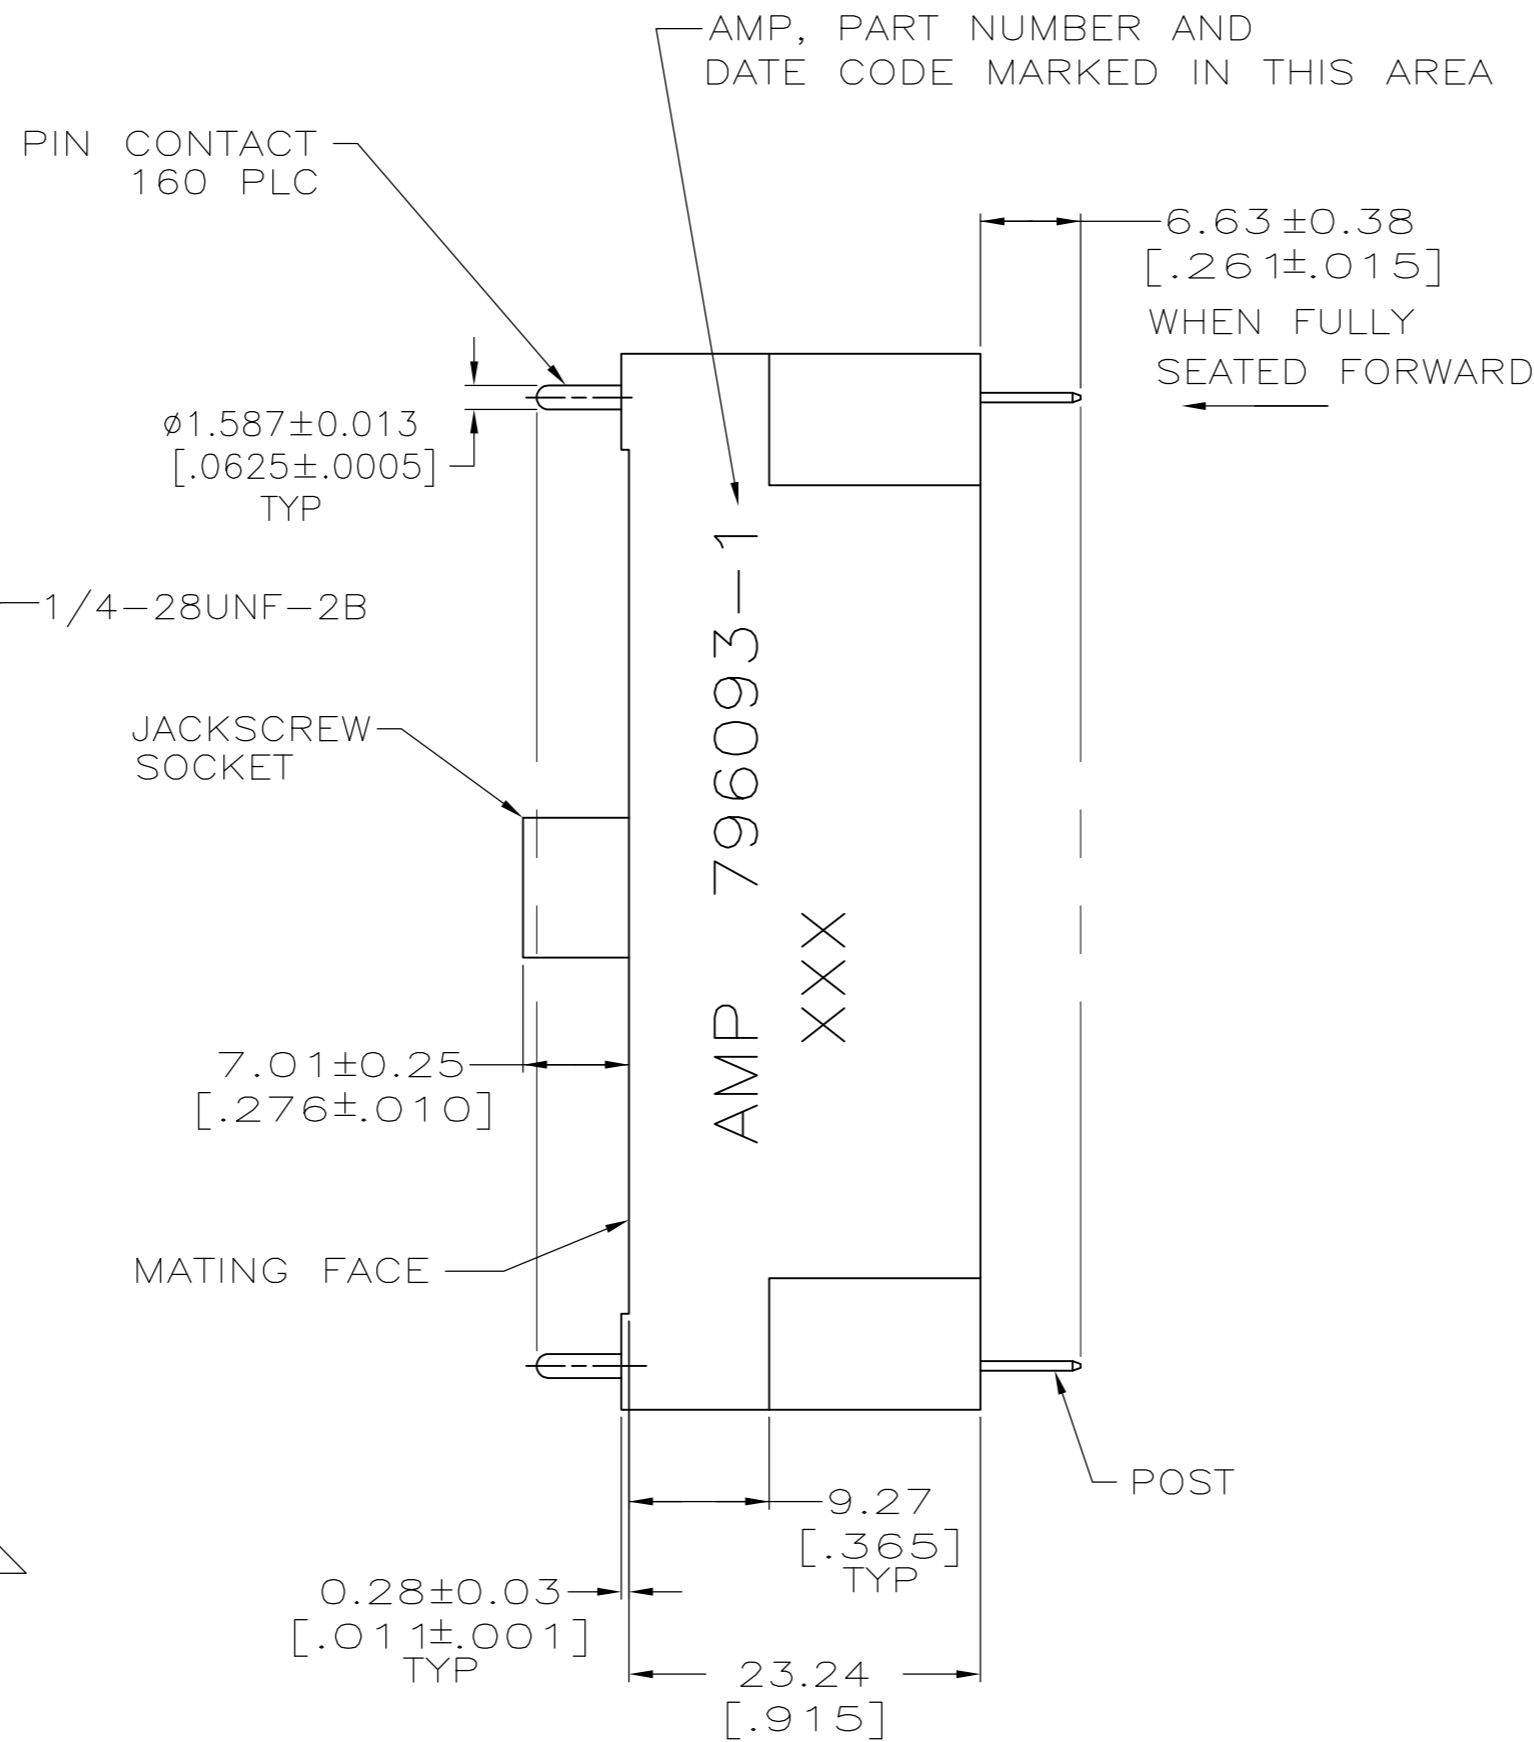


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	B	REVISED PER ECO 09-025494	16NOV09	JR	GS		

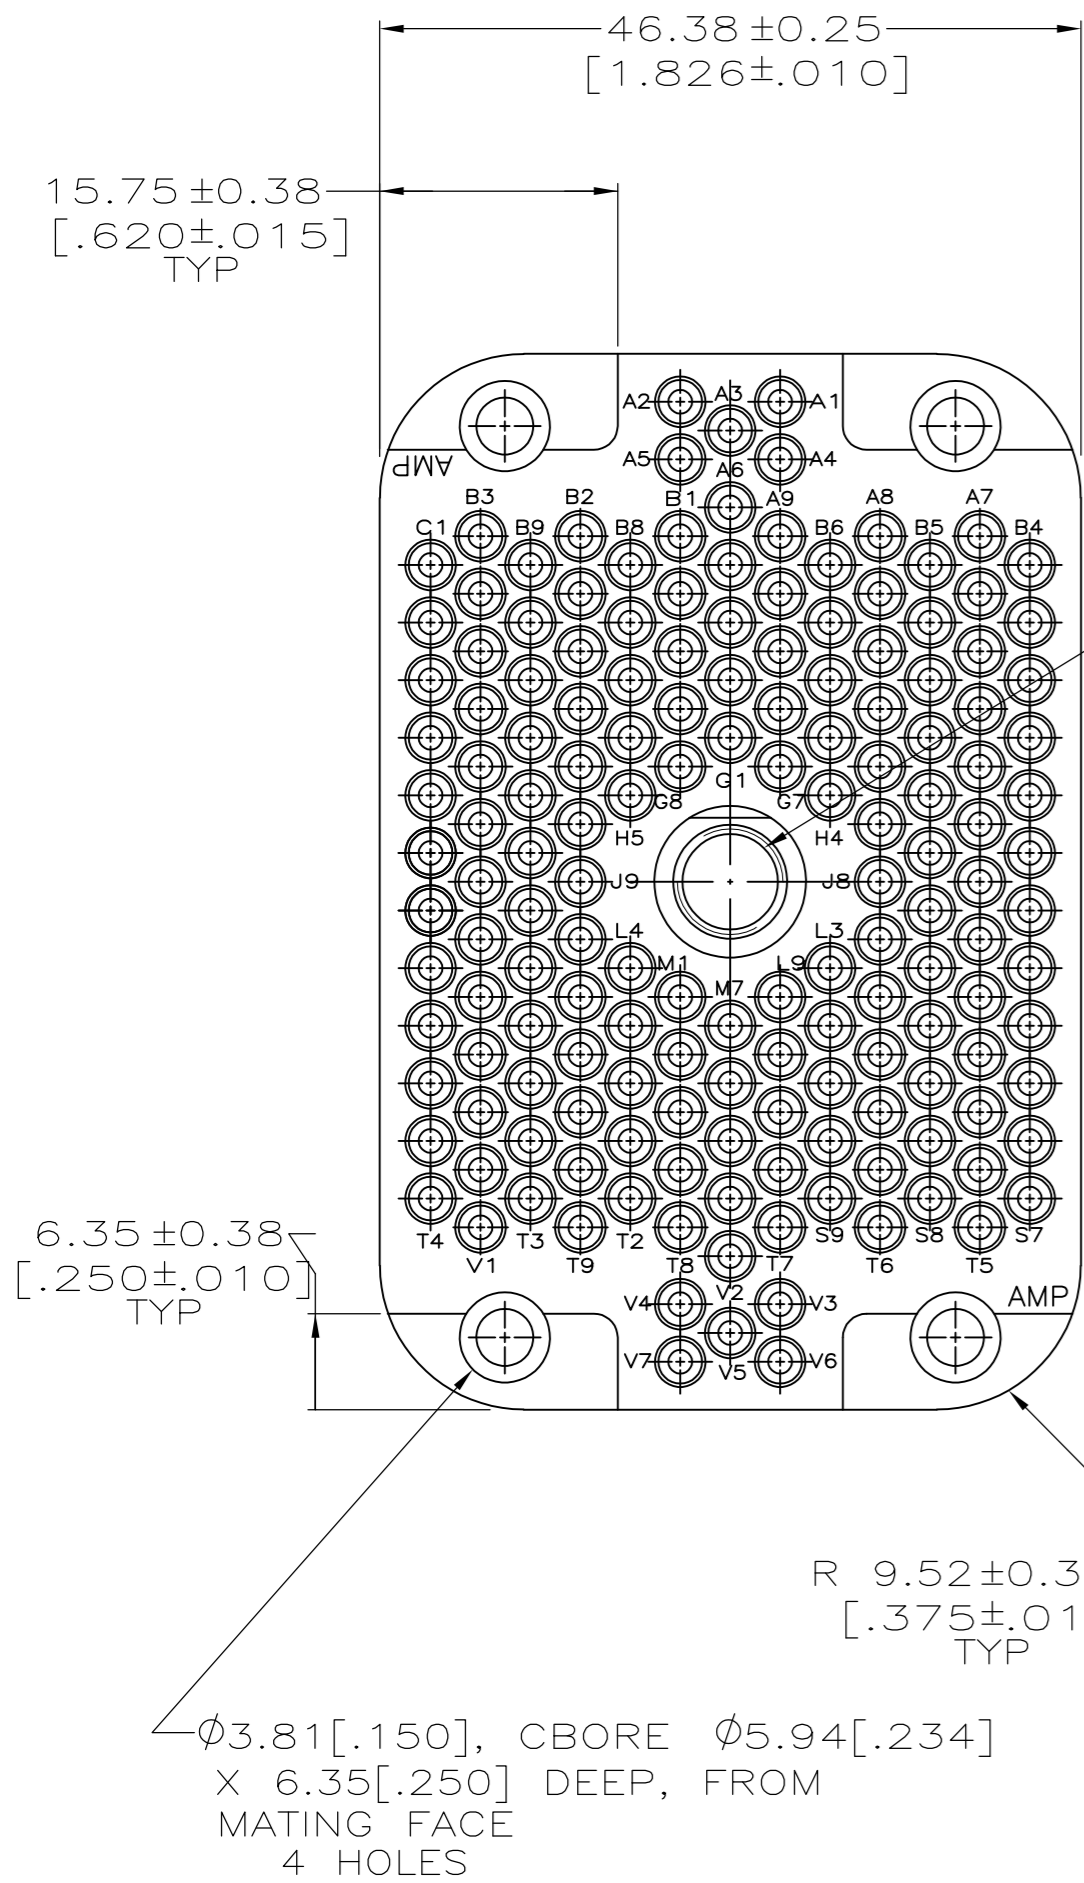

1. THIS ASSEMBLY MATES WITH 789092.

△ JACKSCREW SOCKET: STAINLESS STEEL.  
 PIN CONTACT: BRASS.  
 RECEPTACLE BLOCK: DIALLYL PHTHALATE, BLUE.

△ PIN CONTACT: 0.76µm[.000030] MIN GOLD ON 1.588[.0625], 6.35[.250] FROM MATING END AND REMAINDER GOLD FLASH ALL OVER 1.27 µm[.000050] MIN NICKEL.  
 POST: 2.54µm[.000100] MIN TIN-LEAD PER MIL-T-10727 OVER 2.54µm[.000050] MIN NICKEL PER QQ-N-290.

△ PIN CONTACT: 0.76µm[.000030] MIN GOLD ON 1.588[.0625], 6.35[.250] FROM MATING END AND REMAINDER GOLD FLASH ALL OVER 1.27 µm[.000050] MIN NICKEL PER QQ-N-290.  
 POST: 2.54µm[.000100] MIN TIN PER MIL-T-10727 OVER 2.54µm[.000050] MIN NICKEL PER QQ-N-290.

△	796093-2
△	796093-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.DORWART	20 APR 98	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK	G.STEINHAUER	21 APR 98	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	G.STEINHAUER	21 APR 98	RECEPTACLE ASSEMBLY, 160 POSITION, POSTED, M SERIES	
0 PLC	± -	PRODUCT SPEC	-			
1 PLC	± -	APPLICATION SPEC	-			
2 PLC	± 0.13 [.005]	WEIGHT	-			
3 PLC	± -	CUSTOMER DRAWING	-			
4 PLC	± -	SCALE	2:1			
ANGLES	± -	SHEET	1 OF 1			
FINISH	-	REV	B			