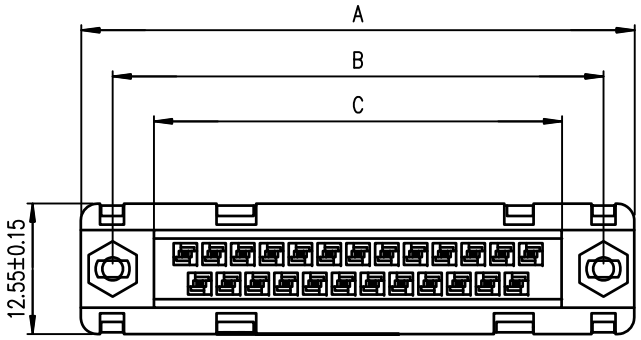

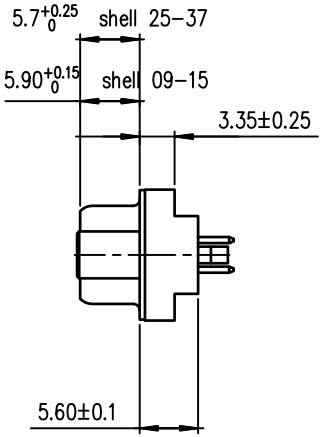

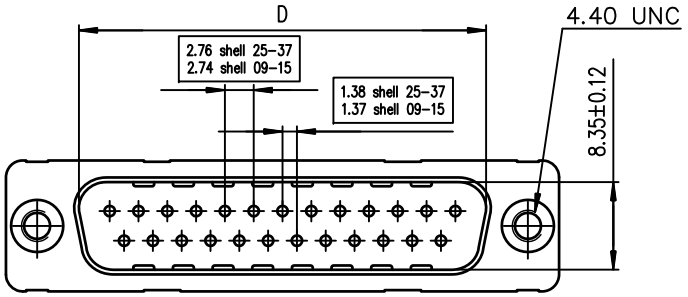

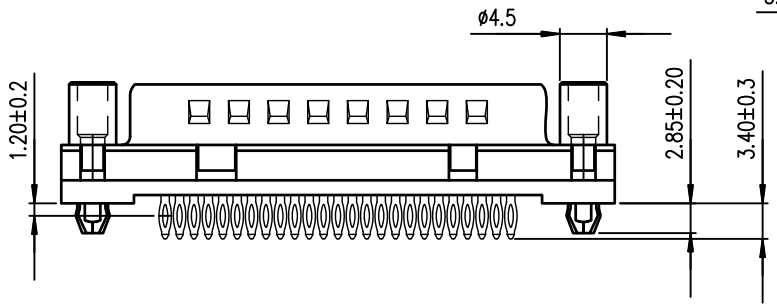

PC board drilling dimensions(after plating)

(thickness ≤ 3.20±0.30mm)

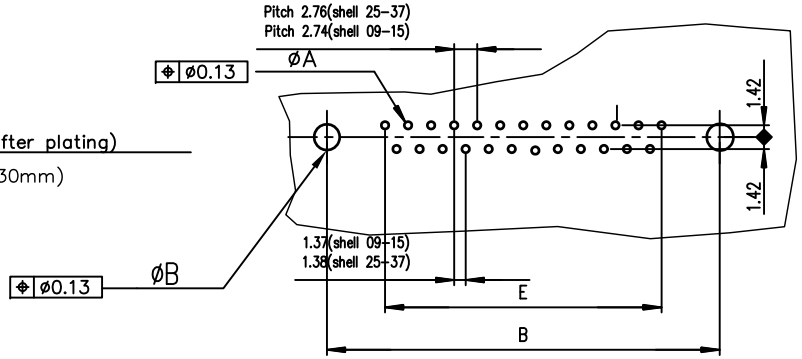

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25 0	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P90C4GV00LF	D09P90C6GV00LF
15	39.14	33.32	25.18	25.12	19.18	D15P90C4GV00LF	D15P90C6GV00LF
25	53.03	47.04	39.12	38.84	33.12	D25P90C4GV00LF	D25P90C6GV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P90C4GV00LF	D37P90C6GV00LF
						gold flash	0.76» gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

ltr	ecn no	dr	date
B	–	JAR	1996-07-24
C	LS05-004	MPE	2005-02-08
D	LS06-0097	LGO	2006-07-29
E	LS06-0140	LGO	2006-09-16
F	109-0268	NG	2009-11-24
G	ELX-I-24020	AAB	2016-06-06

mat'l. code

surface ISO 1302

tolerance ISO 406 ISO 1101

tolerances unless otherwise specified

angles 0°±2°

linear .0±0.1 / .00±0.1 / .000±0.1

projection

mm

scale 2:1

dr	PESSON	1995-10-03
engr	MITHUN PAUL	2016-06-06
chr	ATHUL A.B	2016-06-06
appd	BIJU K PAUL	2016-06-06

sheet index | revision G | sheet 1

product family: D-SUB

title: MALE CONNECTOR DELTA LOW PROFILE STRAIGHT PRESS-FIT

dwg no C01-8646-0371 | sheet 1 of 1 | size A3

type Product Customer Drawing

Amphenol FCi

© 2016 AFCI

form: A3-2016-02-24

PDS: Rev :G STATUS:Released Printed: Jun 07, 2016