

SUMMARY

Wires

Low	10
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	3T
Termination type	Male solder
IP rating	68
Cable Ø	10.10 - 10.50 mm
Matching parts	EGG.3T.310.KLL
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet and nut for fitting a bend relief
Keying	
Housing Material	Brass (black chrome) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C11: 10.1 - 10.5 mm
Variant	Z : Nut for fitting a bend relief

Performance

Configuration	
Insulator	
Rated Current	12 Amps

Specifications

Contact Type: Solder
Vtest: 900 V (DC)600 V (AC)


Others

Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >144 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 68

DRAWINGS

Draws

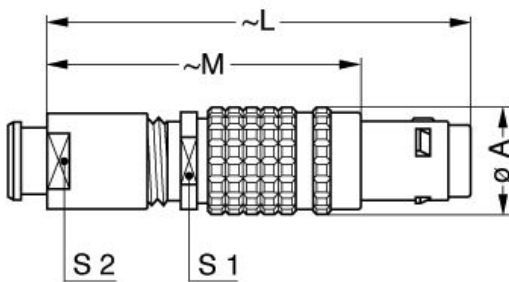

Dimensions

	A	L	M
mm.	17	62	47
in.	0,67	2,44	1,85

RECOMMENDED BY LEMO

Tools

None

Cables